


DURABILITY OF CONCRETE




PENETRON ADMIX[®]: προσθέτει 60 έτη στον κύκλο ζωής του σκυροδέματος σε διαβρωτικό περιβάλλον (μελέτη του ACI για τα πρόσμικτα με ανάπτυξη κρυστάλλων)

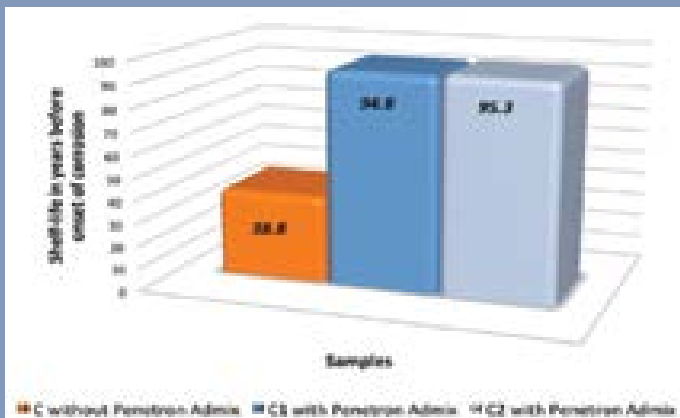


- Μόνιμη Στεγανοποίηση
- Αντιδιαβρωτική Προστασία
- Βελτίωση Αντοχών
- Ανθεκτικότητα σε Χημική Καταπόνηση

**PENETRON**[®]
TOTAL CONCRETE PROTECTION

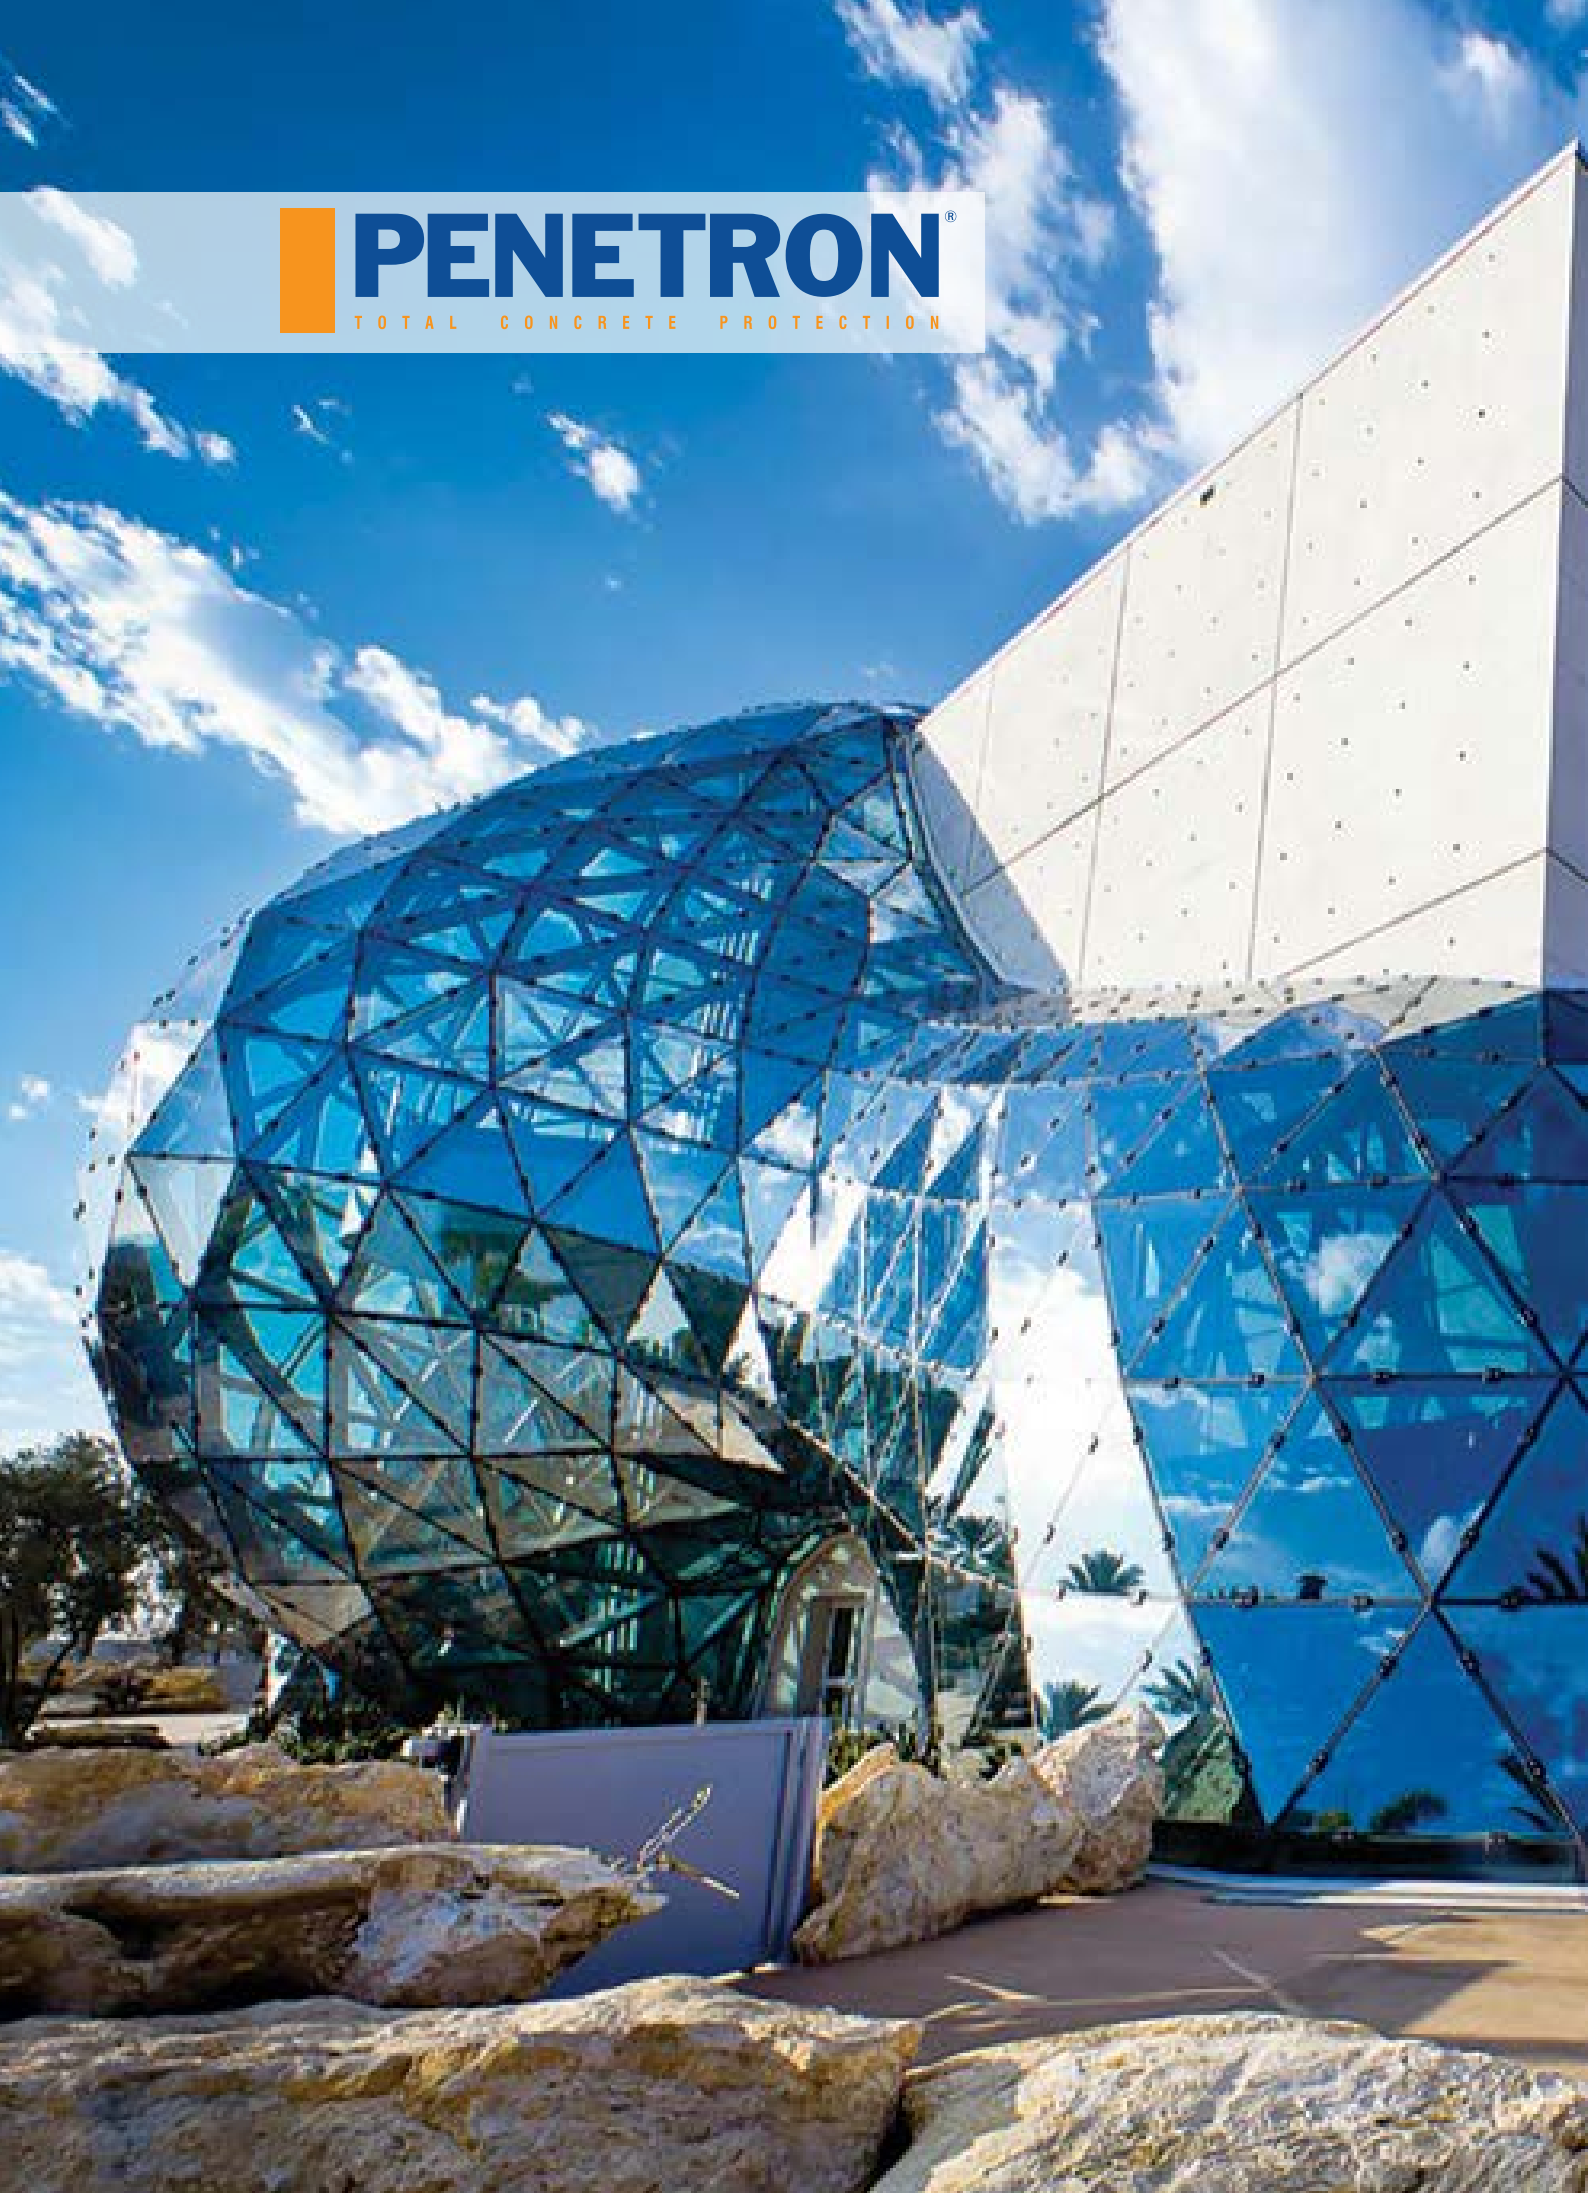

Ανθεκτικότητα Σκυροδέματος (Durability of Concrete)

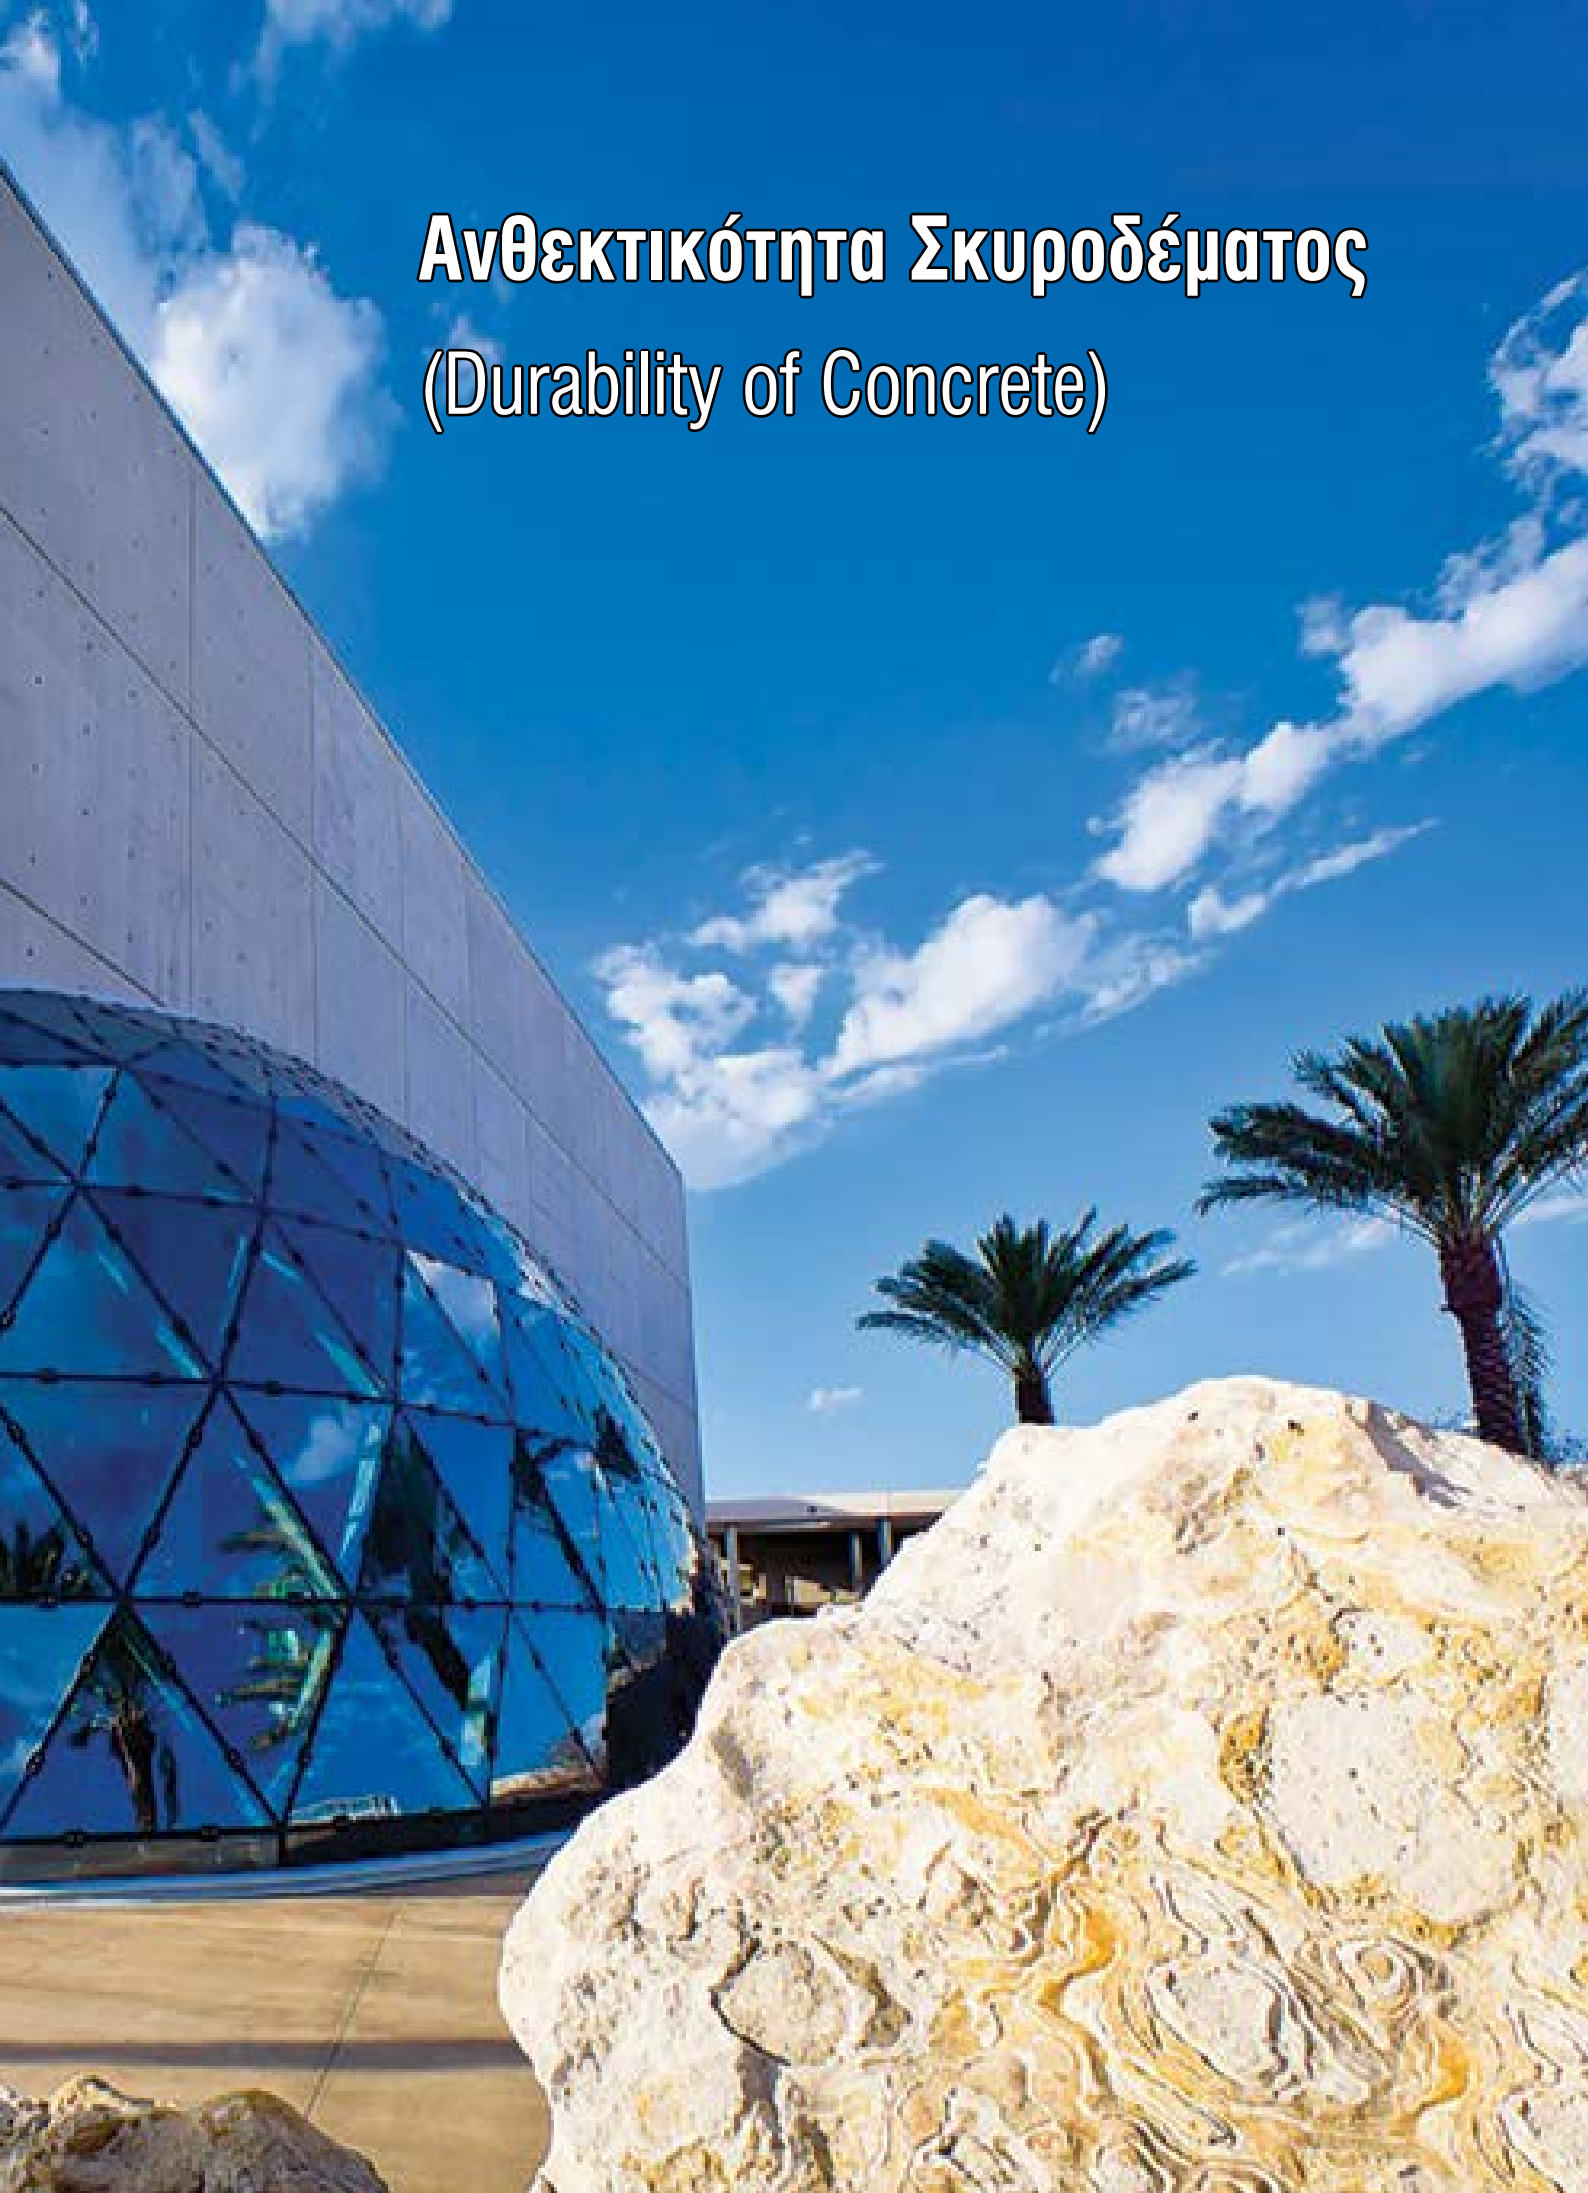


ΣΚΥΡΟΔΕΜΑ



**ΑΠΟΤΕΛΕΙ ΤΟ ΔΕΥΤΕΡΟ
ΣΕ ΧΡΗΣΗ ΥΛΙΚΟ ΣΤΗ ΓΗ
ΜΕΤΑ ΤΟ ΝΕΡΟ**

Περιεχόμενα

- Ανθεκτικότητα Σκυροδέματος
PENETRON INTERNATIONAL (Παρουσίαση) Σελ. 6
- Αναφορές του
Αμερικανικού Ινστιτούτου Σκυροδέματος (ACI)..... Σελ. 17
- PRAN vs PRAH
PENETRON INTERNATIONAL (Αναφορά) Σελ. 24
- PENETRON ADMIX®
Ανάπτυξη κρυστάλλων στο σκυρόδεμα
(Παρουσίαση συστήματος) Σελ. 33
- Έργα ανά τον κόσμο
PENETRON INTERNATIONAL..... Σελ. 57
- PENETRON Newsletters..... Σελ. 66
- PENETRON HELLAS
10 χρόνια στην Ελλάδα
(Η ανάπτυξη στην Νοτιοανατολική Ευρώπη)..... Σελ. 98

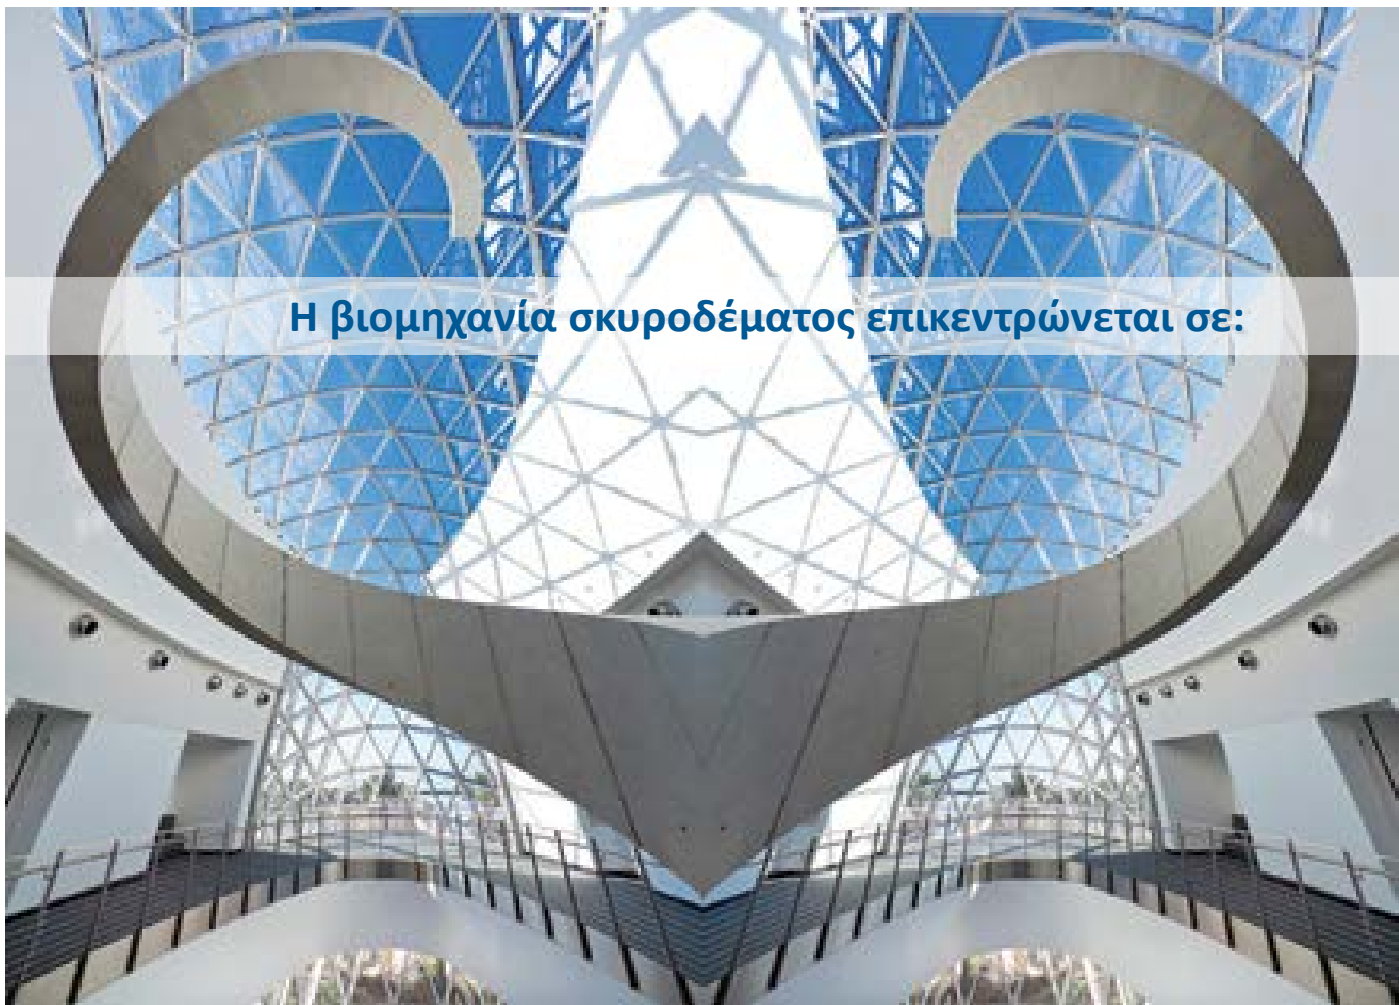

Η βιομηχανία σκυροδέματος επικεντρώνεται σε:

ΑΝΤΟΧΗ

ΠΛΑΣΤΙΚΕΣ
ΙΔΙΟΤΗΤΕΣ

ΔΟΜΙΚΕΣ
ΙΔΙΟΤΗΤΕΣ

Ελκυστικές και σταθερές κατασκευές


**...και κατασκευές που μπορούν να αντέξουν
σε υψηλές υδροστατικές πιέσεις**






Ζωή σχεδιασμού vs. Διάρκεια λειτουργίας

Ζωή σχεδιασμού vs. Διάρκεια λειτουργίας

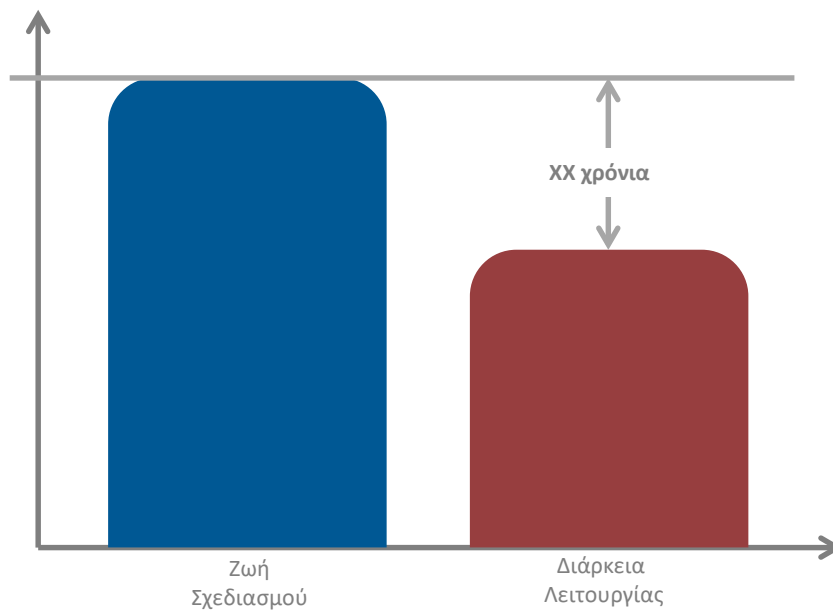

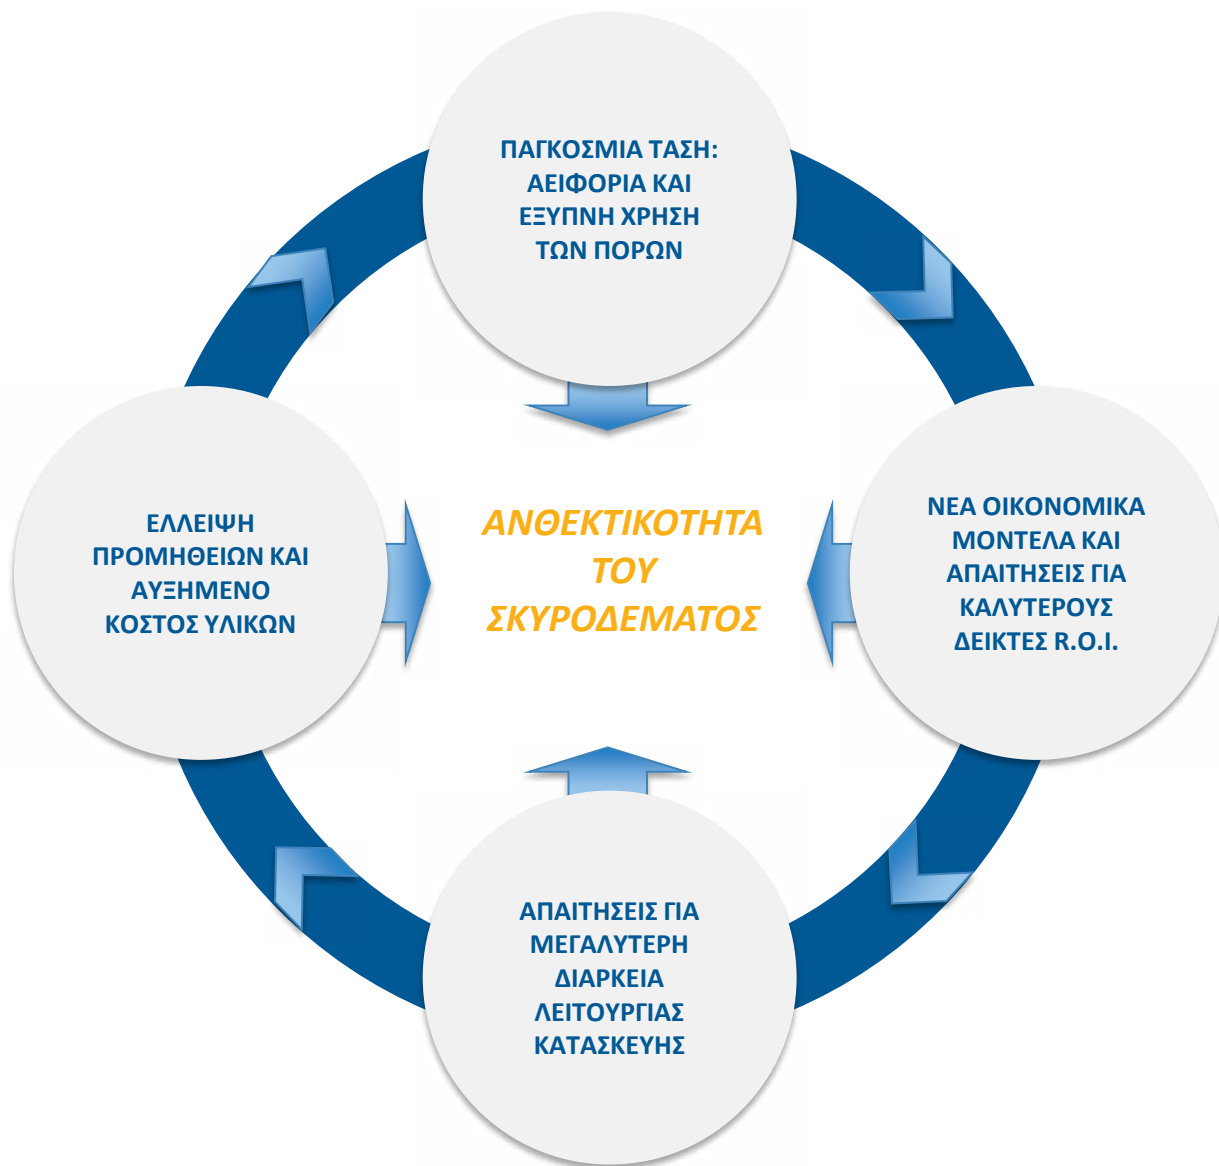

Τι σημαίνει ανθεκτικότητα σκυροδέματος;

“Ανθεκτικότητα του σκυροδέματος από υδραυλικό τσιμέντο ορίζεται ως η ικανότητά του να ανθίσταται στις καιρικές συνθήκες, στη χημική προσβολή, στην τριβή ή σε οποιαδήποτε άλλη μέθοδο αλλοίωσης. Το ανθεκτικό σκυρόδεμα θα διατηρήσει την αρχική του μορφή, την ποιότητα και την λειτουργικότητά του όταν βρίσκεται εκτεθειμένο στο περιβάλλον του.” (ACI 201.2R-10)




Οι κύριοι λόγοι υποβάθμισης του σκυροδέματος

ΔΙΑΒΡΩΣΗ ΤΟΥ ΜΕΤΑΛΛΙΚΟΥ ΟΠΛΙΣΜΟΥ	ΨΥΞΗ & ΑΠΟΨΥΞΗ	ΧΗΜΙΚΕΣ ΑΝΤΙΔΡΑΣΕΙΣ ΜΕ ΤΑ ΑΔΡΑΝΗ (ASR/AAR)	ΧΗΜΙΚΗ ΠΡΟΣΒΟΛΗ

ΔΙΑΒΡΩΣΗ

Το σκυροδέμα παρουσιάζει μεγάλη αντοχή θλίψης αλλά μικρή αντοχή εφελκυσμού, οπότε απαιτείται η χρήση μεταλλικού οπλισμού, ώστε να αποτρέψει την διάσπασή του υπό φορτίο.

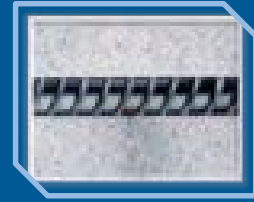

Όμως, το **νερό** επιτρέπεται να διέρχεται μέσω των ρηγματώσεων, των κενών και των πόρων του σκυροδέματος μεταφέροντας διαβρωτικές χημικές ουσίες, που προσβάλλουν τον οπλισμό.

Άπαξ και αρχίσει ο μηχανισμός της διάβρωσης δεν είναι εύκολο να προσδιοριστεί η έκταση της ζημίας, διότι μπορεί να συμβεί οπουδήποτε κατά μήκος του δικτύου του οπλισμού.



ΨΥΞΗ ΚΑΙ ΑΠΟΨΥΞΗ



Κάτω από συνθήκες ψύξης, το **νερό** που παγιδεύεται μέσα στο σκυροδέμα μετατρέπεται σε πάγο και διαστέλλεται, δημιουργώντας ρωγμές

Όταν ο πάγος τήκεται, το νερό ταξιδεύει ακόμη βαθύτερα στο σκυροδέμα, όπου ο ίδιος κύκλος ψύξης/απόψυξης επαναλαμβάνεται



Η χρήση παγολυτικών αλάτων και άλλων παγολυτικών χημικών, προκαλούν μόνο επιδείνωση του προβλήματος με την εισαγωγή επιθετικών χημικών στο σκυροδέμα



ΑΝΤΙΔΡΑΣΕΙΣ ΑΛΚΑΛΙΩΝ-ΑΔΡΑΝΩΝ (ASR/AAR)

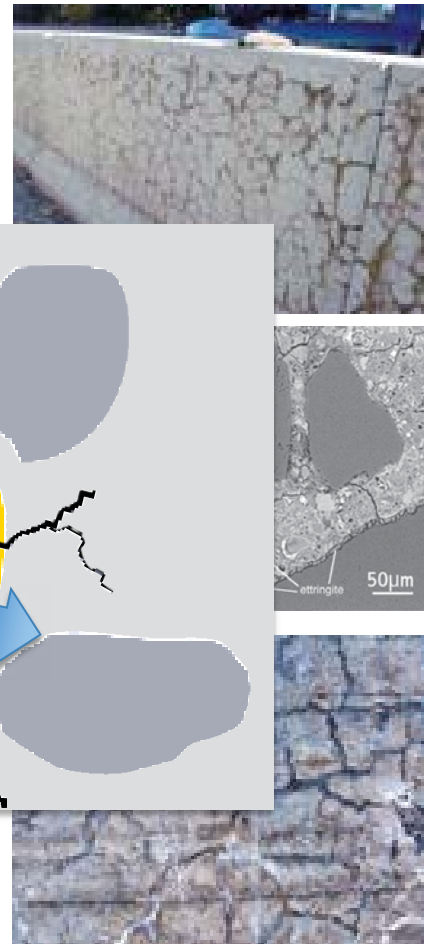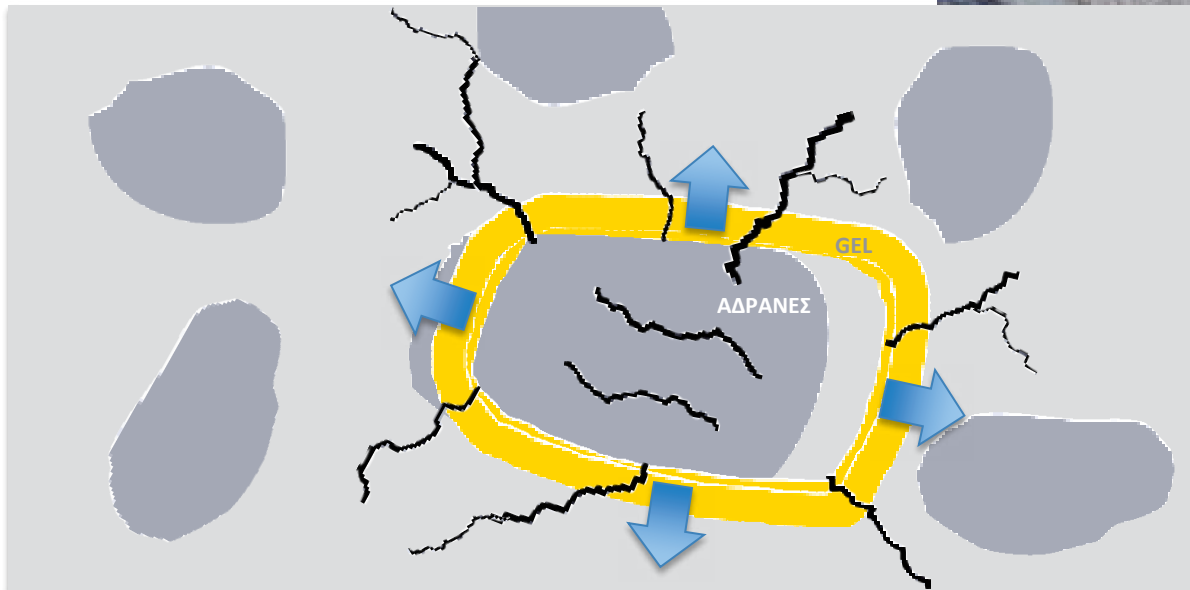

ΧΗΜΙΚΗ ΠΡΟΣΒΟΛΗ

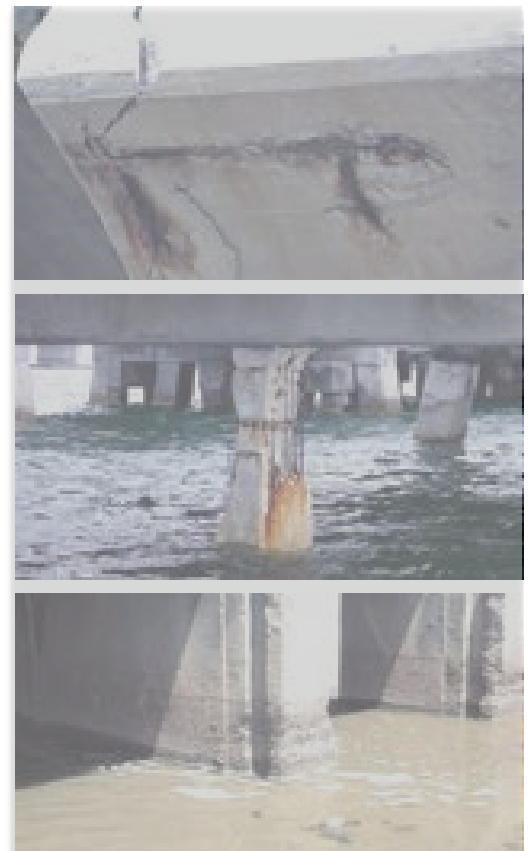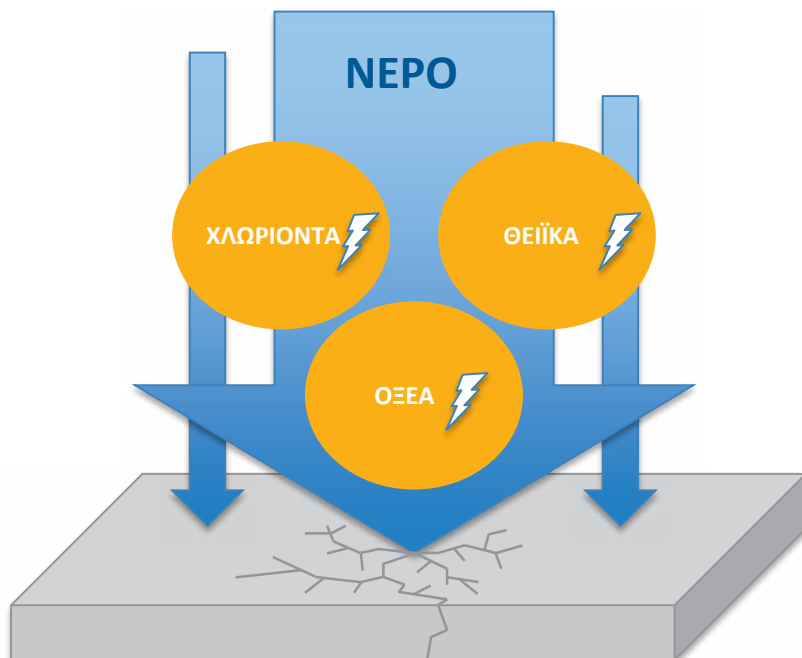


Η ΚΥΡΙΑ ΑΙΤΙΑ ΦΘΟΡΑΣ ΤΟΥ ΣΚΥΡΟΔΕΜΑΤΟΣ

ΝΕΡΟ



**ΑΥΞΗΣΗ ΤΗΣ ΑΝΘΕΚΤΙΚΟΤΗΤΑΣ
ΤΟΥ ΣΚΥΡΟΔΕΜΑΤΟΣ/
ΩΦΕΛΙΜΗ ΔΙΑΡΚΕΙΑ
ΛΕΙΤΟΥΡΓΙΑΣ**

Κίνδυνοι της ανθεκτικότητας (εσωτερικοί vs. εξωτερικοί)

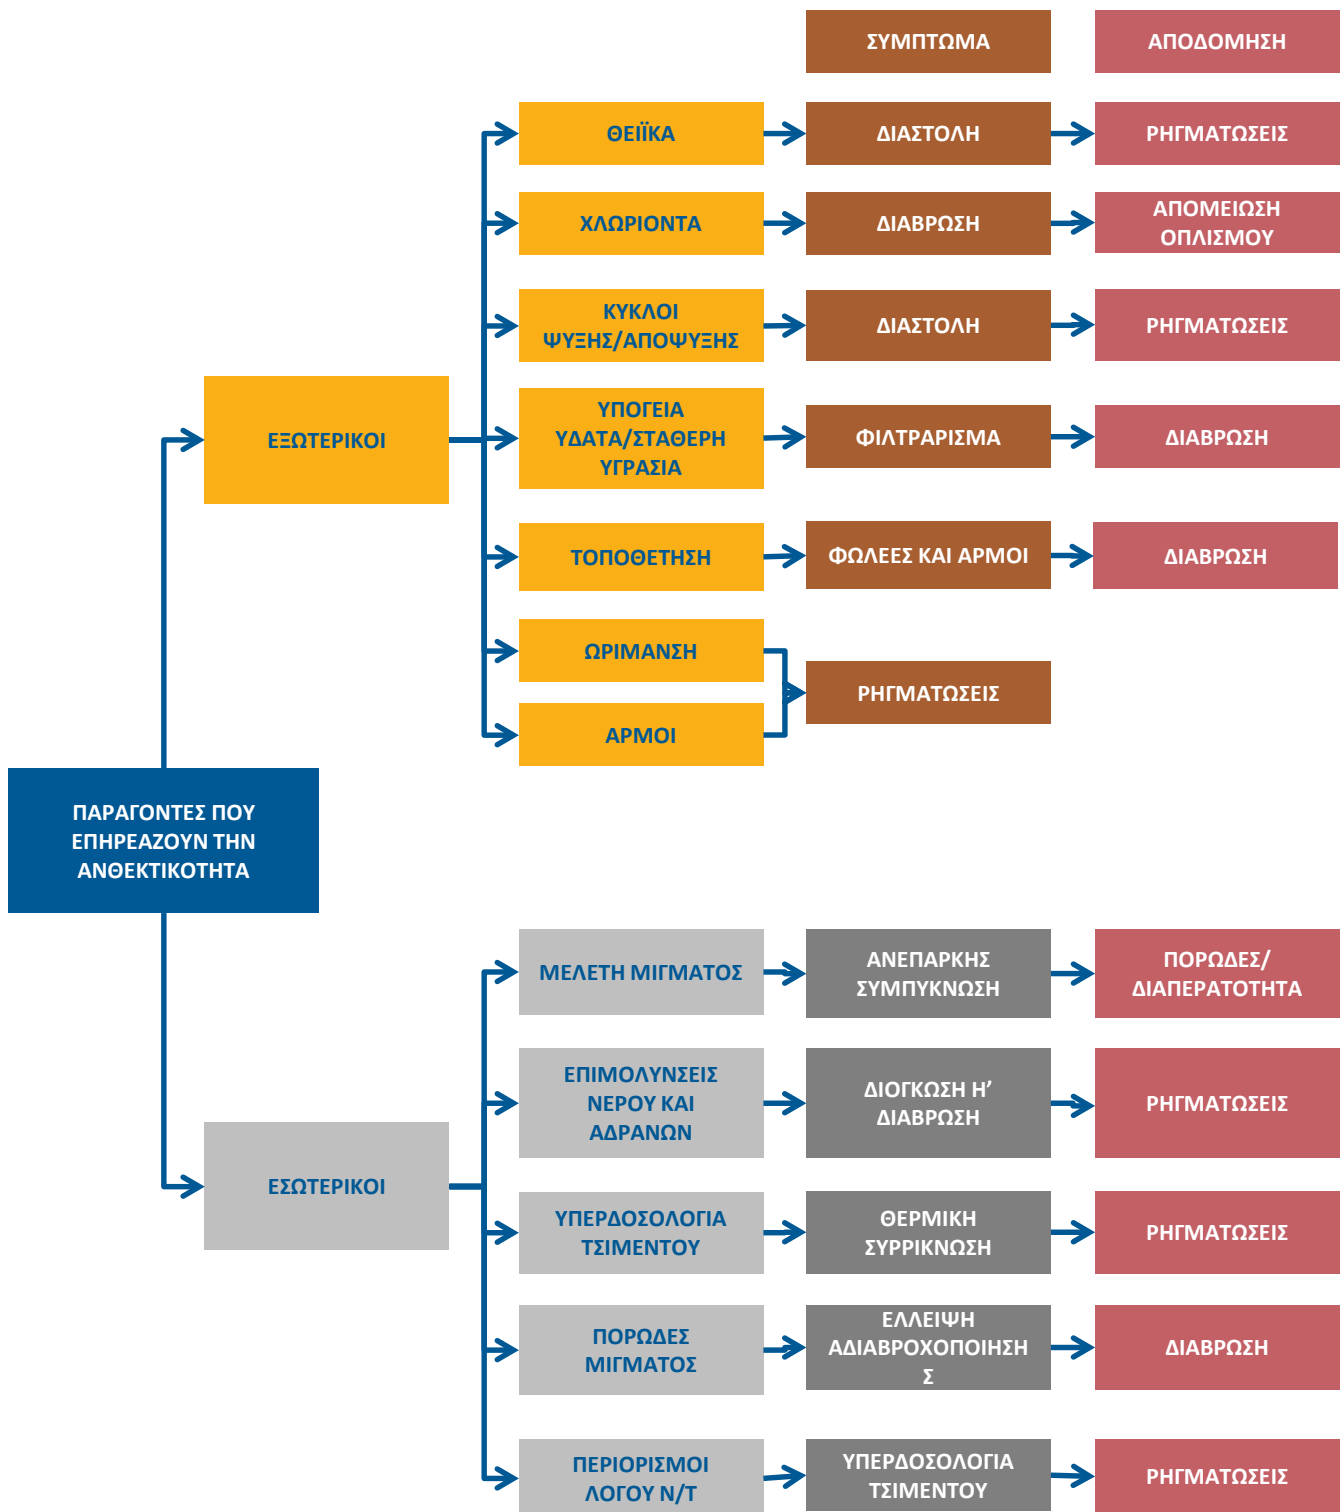

ΔΙΑΠΕΡΑΤΟΤΗΤΑ


Ο ρυθμός ροής ενός ρευστού μέσα σε ένα πορώδες στερεό

Όσο καλύτερα συνδέονται τα κενά αυτά, τόσο περισσότερο αυξάνεται η διαπερατότητα του σκυροδέματος και τόσο ευκολότερα εισέρχονται οι υδατοδιαλυτοί ρυπαντές στο σκυρόδεμα.

Κατά μέσο όρο, το σκυρόδεμα είναι πολύ πορώδες, λόγω ρωγμών, αυρρίσκωσης, κενών και τριχοειδών.



ΜΕΙΩΣΗ ΔΙΑΠΕΡΑΤΟΤΗΤΑΣ

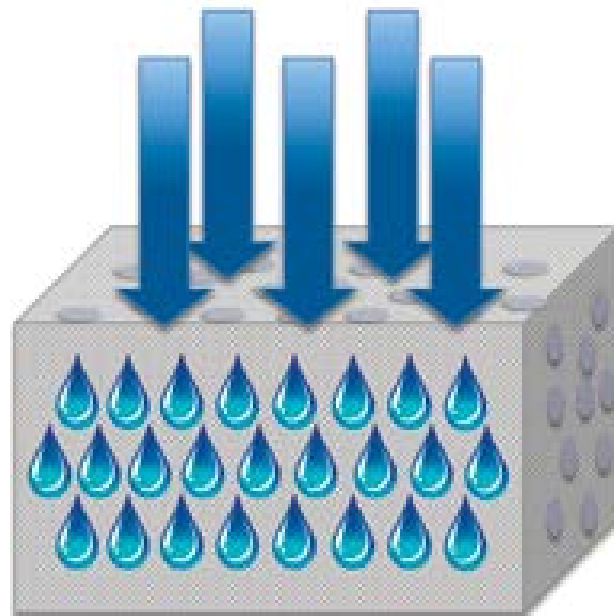

ΜΕΙΩΣΗ ΤΗΣ ΔΙΑΠΕΡΑΤΟΤΗΤΑΣ = ΑΥΞΗΣΗ ΤΗΣ ΑΝΘΕΚΤΙΚΟΤΗΤΑΣ

ΕΠΙΤΕΥΞΗ ΑΝΘΕΚΤΙΚΟΤΗΤΑΣ ΣΚΥΡΟΔΕΜΑΤΟΣ

ΠΑΡΑΔΟΣΙΑΚΑ



PENETRON ADMIX





American Concrete Institute™
Advancing concrete knowledge

**ΑΝΑΦΟΡΕΣ ΤΟΥ ΑΜΕΡΙΚΑΝΙΚΟΥ
ΙΝΣΤΙΤΟΥΤΟΥ ΣΚΥΡΟΔΕΜΑΤΟΣ (ACI)
ΓΙΑ ΤΑ ΠΡΟΣΜΙΚΤΑ ΜΕΙΩΣΗΣ
ΥΔΑΤΟΠΕΡΑΤΟΤΗΤΑΣ ΣΚΥΡΟΔΕΜΑΤΟΣ**

**ΑΝΑΛΥΣΗ ΑΠΟ ΤΗΝ
PENETRON® INTERNATIONAL**

ACI 212.3R-10

**Report on Chemical Admixtures
for Concrete**

Reported by ACI Committee 212



American Concrete Institute®

ADMIXTURES, THEIR CHARACTERISTICS, AND USAGE

Admixture type	Effects and benefits	Materials
Air-entraining (ASTM C260 and AASHTO M154)	Improve durability in freezing and thawing, deicer, sulfate, and alkali-reactive environments. Improve workability.	Salts of wood resins, some synthetic detergents, salts of sulfonated lignin, salts of petroleum acids, salts of proteinaceous material, fatty and resinous acids and their salts, tall oils and gum rosin salts, alkylbenzene sulfonates, salts of sulfonated hydrocarbons.
Accelerating (ASTM C494/C494M and AASHTO M194, Type C or E)	Accelerate setting and early-strength development.	Calcium chloride (ASTM D98 and AASHTO M144), triethanolamine, sodium thiocyanate, sodium/calcium formate, sodium/calcium nitrite, calcium nitrate, aluminates, silicates.
Water-reducing (ASTM C494/C494M and AASHTO M194, Type A)	Reduce water content at least 5%.	Lignosulfonic acids and their salts. Hydroxylated carboxylic acids and their salts. Polysaccharides, melamine polycondensation products, naphthalene polycondensation products, and polycarboxylates.
Water-reducing and set-retarding (ASTM C494/C494M and AASHTO M194, Type D)	Reduce water content at least 5%. Delay set time.	See water reducer, Type A (retarding component is added).
High-range water-reducing (ASTM C494/C494M and AASHTO M194, Type F or G)	Reduce water content by at least 12 to 40%, increase slump, decrease placing time, increase flowability of concrete, used in self-consolidating concrete (SCC).	Melamine sulfonate polycondensation products, naphthalene sulfonate polycondensation products, and polycarboxylates.
Mid-range water-reducing (ASTM C494/C494M, Type A)	Reduce water content by between 5% and 10% without retardation of initial set.	Lignosulfonic acids and their salts. Polycarboxylates.
Extended set control (hydration control) (ASTM C494/C494M, Type B or D)	Used to stop or severely retard the cement hydration process. Often used in wash water and in returned concrete for reuse, and can provide medium- to long-term set retardation for long hauls. Retain slump life in a more consistent manner than normal retarding admixtures.	Carboxylic acids. Phosphorus-containing organic acid salts.
Shrinkage-reducing	Reduce drying shrinkage. Reductions of 30 to 50% can be achieved.	Polyoxyalkylene alkyl ether. Propylene glycol.
Corrosion-inhibiting (ASTM C1582/C1582M)	Significantly reduce the rate of steel corrosion and extend the time for onset of corrosion.	Amine carboxylates aminoester organic emulsion, calcium nitrite, organic alkydicarboxylic. Chromates, phosphates, hypophosphites, alkalis, and fluorides.
Lithium admixtures to reduce deleterious expansions from alkali-silica reaction	Minimize deleterious expansions from alkali-silica reaction.	Lithium nitrate, lithium carbonate, lithium hydroxide, and lithium nitrite.
Permeability-reducing admixture: non-hydrostatic conditions (PRAN)	Water-repellent surface, reduced water absorption.	Long-chain fatty acid derivatives (stearic, oleic, caprylic capric), soaps and oils (tallows, soya-based), petroleum derivatives (mineral oil, paraffin, bitumen emulsions), and fine particle fillers (silicates, bentonite, talc).
Permeability-reducing admixture: hydrostatic conditions (PRAH)	Reduced permeability, increased resistance to water penetration under pressure.	Crystalline hydrophilic polymers (latex, water-soluble, or liquid polymer).
Bonding	Increase bond strength.	Polyvinyl chloride, polyvinyl acetate, acrylics, and butadiene-styrene copolymers.
Coloring	Colored concrete.	Carbon black, iron oxide, phthalocyanine, raw burnt umber, chromium oxide, and titanium dioxide.
Flocculating	Increase interparticle attraction to allow paste to behave as one large flock.	Vinyl acetate-maleic anhydride copolymer.
Fungicidal, germicidal, insecticidal	Inhibit or control bacterial, fungal, and insecticidal growth.	Polyhalogenated phenols, emulsion, and copper compounds.
Rheology/viscosity-modifying	Modify the rheological properties of plastic concrete.	Polyethylene oxides, cellulose ethers (HEC, HPMC), alginates (from seaweed), natural and synthetic gums, and polyacrylamides or polyvinyl alcohol.
Air-detraining	Reduce air in concrete mixtures, cement slurries, and other cementing applications.	Tributyl phosphate, dibutyl phosphate, dibutylphthalate, polydimethylsiloxane, dodecyl (lauryl) alcohol, octyl alcohol, polypropylene glycols, water-soluble esters of carbonic and boric acids, and lower sulfonate oils.



American Concrete Institute®
Advancing concrete knowledge

CHAPTER 15—PERMEABILITY-REDUCING ADMIXTURES


15.1—Introduction

While it is generally accepted that well-proportioned and properly cured concrete produced using a low w/cm will result in a finished product with good durability and low permeability, no concrete structure is absolutely waterproof or “bottle tight” (Perkins 1986). Concrete is a porous material, and water can penetrate concrete through pores and microcracks due to capillary absorption (often referred to as wicking) or due to hydrostatic pressure. Capillary absorption is the movement of water through the small pores in concrete in the absence of an externally applied hydraulic head, and is the result of surface interactions between the water and the pore wall. The permeability of concrete is the movement of water due to a pressure gradient, such as water in contact with a concrete structure installed underground. In some cases, porosity may be exacerbated by external factors such as incomplete consolidation and curing, which may ultimately

- Hydrophobic or water-repellent chemicals are the largest group and include materials based on soaps and long-chain fatty acid derivatives, vegetable oils (tallows, soya-based materials, and greases), and petroleum (mineral oil, paraffin waxes, and bitumen emulsions). These materials provide a water-repellent layer along pores in the concrete, but the pores remain physically open;
- Finely divided solids include materials such as inert and chemically active fillers (talc, bentonite, silicious powders, clay, hydrocarbon resins, and coal tar pitches) and chemically active fillers (lime, silicates, and colloidal silica). Fine solids act as densifiers and physically restrict the passage of water through the pores. Some authors include SCMs in this category as well; and
- Crystalline materials consist of proprietary active chemicals provided in a carrier of cement and sand. The hydrophilic nature of these materials causes them to increase the density of calcium silicate hydrate (CHS) and/or generate pore-blocking deposits that resist water penetration.




“Επιπλέον, έχει αναπτυχθεί μια κατηγορία υλικών που αναφέρονται ως Πρόσμικτα Μείωσης Διαπερατότητας (PRAs), ώστε να βελτιωθεί η ανθεκτικότητα του σκυροδέματος μέσω ελέγχου του νερού και της περατότητας της υγρασίας (Roy and Northwood 1999), καθώς και με τη μείωση της εισόδου των χλωριόντων (Munn et al. 2003) και της διαπερατότητας (Munn et al. 2003).”

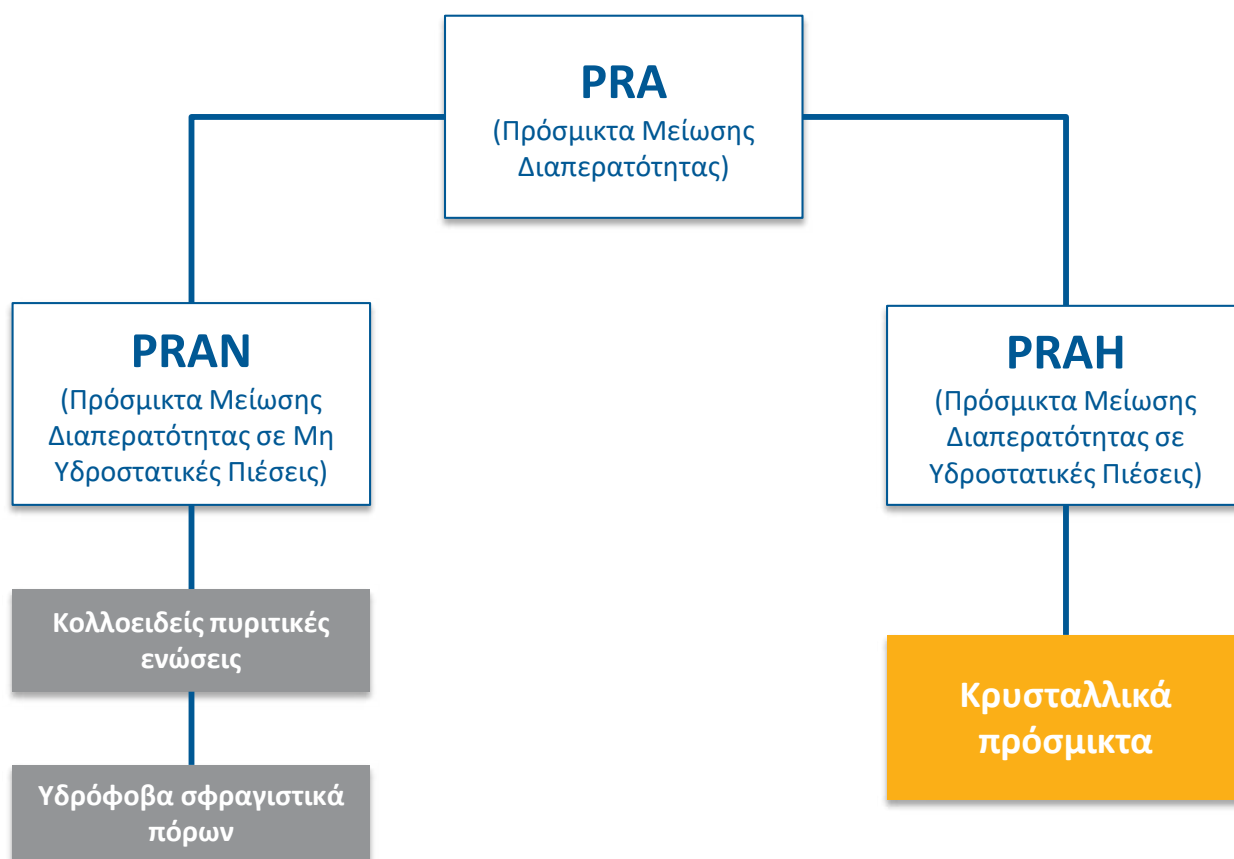


Μόνο τα κρυσταλλικά πρόσμικτα
μπορούν να χαρακτηρισθούν ως πραγματικά PRAH




American Concrete Institute®
Addressing concrete's challenges

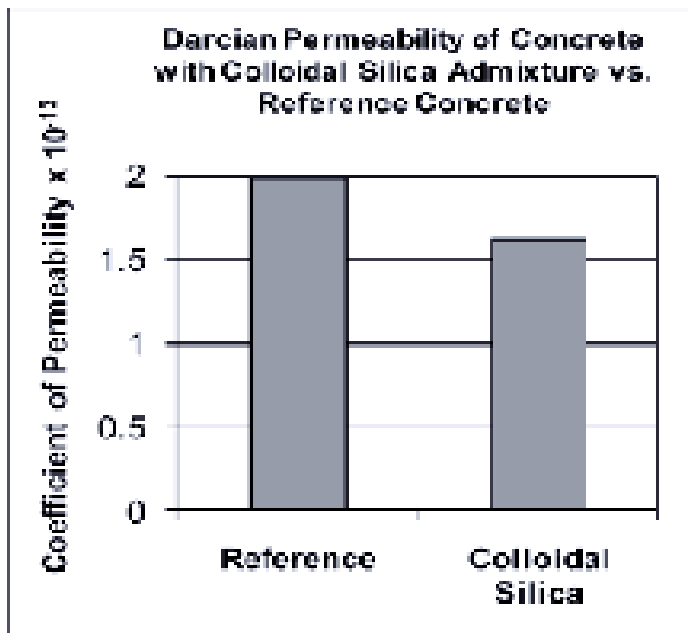

Είκ. 15.5—Μείωση της διαπερατότητας του σκυροδέματος με τη χρήση PRAs. Πρότυπο δοκιμής BS EN 12390-8. Πίεση = 150 psi (1,0 MPa). Χρόνος = 96 ώρες

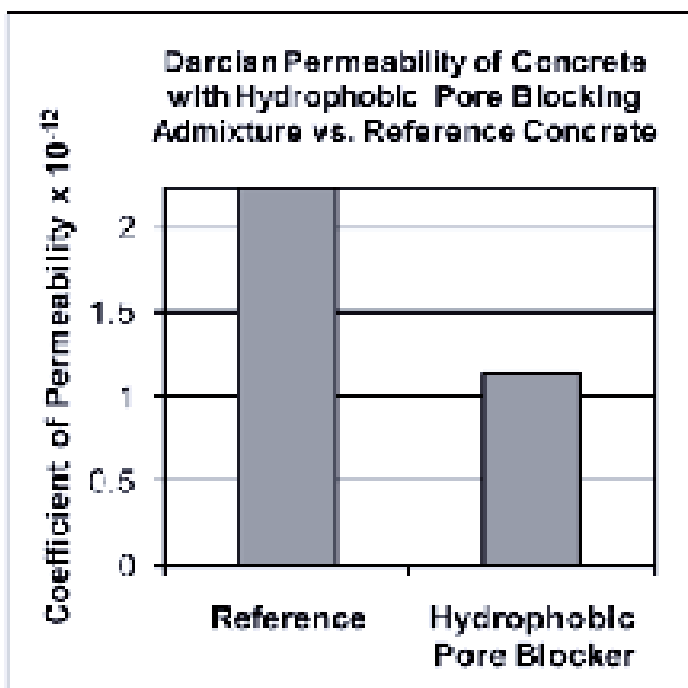

Είκ. 15.5—Μείωση της διαπερατότητας του σκυροδέματος με τη χρήση PRAs. Πρότυπο δοκιμής BS EN 12390-8. Πίεση = 150 psi (1,0 MPa). Χρόνος = 96 ώρες

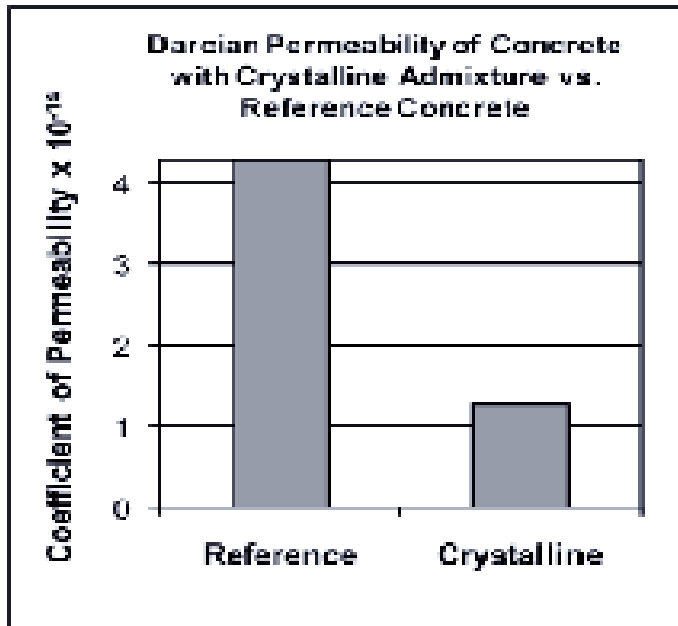

Είκ. 15.5—Μείωση της διαπερατότητας του σκυροδέματος με τη χρήση PRAs. Πρότυπο δοκιμής BS EN 12390-8. Πίεση = 150 psi (1,0 MPa). Χρόνος = 96 ώρες

Report on Chemical Admixtures for Concrete (ACI 212.3R-10)

Table 15.1—Reduction in permeability of concrete using PRAs

Admixture type	Coefficient of permeability of reference concrete	Coefficient of permeability of test concrete	Percent reduction in permeability
Crystalline	4.29×10^{-14}	1.28×10^{-14}	70
Colloidal silica	1.98×10^{-13}	1.61×10^{-13}	19
Hydrophobic pore blocker	2.23×10^{-12}	1.14×10^{-12}	49

Τα κρυσταλλικά πρόσμικτα συνιστώνται για τη μείωση της διαπερατότητας και την αύξηση της ανθεκτικότητας του σκυροδέματος.

Αναφορά του Αμερικανικού Ινστιτούτου Σκυροδέματος ACI 212.3R-10 «Αναφορά στα Κρυσταλλικά Πρόσμικτα Σκυροδέματος» - Κεφάλαιο 15 «Πρόσμικτα Μείωσης Διαπερατότητας»

Η «Αναφορά στα Κρυσταλλικά Πρόσμικτα Σκυροδέματος», η οποία εκδόθηκε από το Αμερικανικό Ινστιτούτο Σκυροδέματος (ACI 212.3R-10 / Ιανουάριος 2011) περιλαμβάνει ένα ξεχωριστό κεφάλαιο, που αφορά στα πρόσμικτα μείωσης της διαπερατότητας (Permeability-Reducing Admixtures – PRAs). Τα πρόσμικτα PRAs περιλαμβάνουν ένα ευρύ φάσμα προσμίκτων, για μείωση της διαπερατότητας του σκυροδέματος, και μπορούν να χωριστούν στις παρακάτω δύο κατηγορίες:

- **Πρόσμικτα Μείωσης της Διαπερατότητας για Μη-υδροστατικές Πιέσεις** (Permeability-Reducing Admixture for Non-hydrostatic Conditions – PRAN), τα οποία παλαιότερα αναφέρονταν και ως «damp proofing admixtures», όπου η αντίσταση σε νερό υπό πίεση είναι ελάχιστη και δεν κρίνονται κατάλληλα για εφαρμογή σε σκυρόδεμα που βρίσκεται υπό υδροστατική πίεση.
- **Πρόσμικτα Μείωσης της Διαπερατότητας για Υδροστατικές Πιέσεις** (Permeability-Reducing Admixture for Hydrostatic Conditions – PRAN) ή αλλιώς «πρόσμικτα στεγάνωσης», τα οποία κρίνονται ως επαρκώς σταθερά, ώστε να αντιστέκονται σε νερό υπό πίεση και χρησιμοποιούνται για κατασκευή στεγανών δεξαμενών, θεμελιώσεις και κατασκευές αντιστήριξης, κ.λπ.

Σε γενικές γραμμές, η απόδοση των προσμίκτων μείωσης διαπερατότητας εξαρτάται από το εάν πρόκειται για PRAN ή PRAH.

Τα PRANs αποτελούνται από υδρόφοβες ή υδατο-απωθητικές χημικές ενώσεις (σάπωνες και παράγωγα λιπαρών οξέων μακράς αλύσου, φυτικά έλαια και παράγωγα του πετρελαίου), στερεά ψιλής κοκκομετρίας (τάλκης, μπετονίτης, πούδρες πυριτίου, άργιλο, ρητίνες και λιθανρακόπισσα) ή χημικώς δραστικά πληρωτικά υλικά (ασβέστης, και κολλοειδείς πυριτικές ενώσεις). Χρησιμοποιούνται ευρέως για θωράκιση του σκυροδέματος ενάντια στην υγρασία, σε μη υδροστατικές πιέσεις.

Τα PRAHs περιλαμβάνουν λεπτόκοκκα διαμερισμένα στερεά (όπως οι κολλοειδείς πυριτικές ενώσεις), υδρόφοβα σφραγιστικά πόρων και κρυσταλλικά πρόσμικτα. Ωστόσο, τα λεπτόκοκκα διαμερισμένα στερεά (συμπεριλαμβανομένων και των κολλοειδών πυριτικών ενώσεων), χρησιμοποιούνται συνήθως σε εφαρμογές σε μη υδροστατικές συνθήκες και μόνο μερικά από αυτά τα πολυμερή υλικά μπορούν να κατηγοριοποιηθούν ως PRAHs, ενώ τα υδρόφοβα σφραγιστικά πόρων χρησιμοποιούνται μόνο σε εφαρμογές σε συνθήκες απουσίας υδροστατικών πιέσεων. Τα κρυσταλλικά υδρόφιλα πολυμερή (latex, υδατοδιαλυτά ή υγρά πολυμερή) χρησιμοποιούνται μόνο σε εφαρμογές υπό υδροστατική πίεση.

Τα κρυσταλλικά πρόσμικτα ανθίστανται στη διείσδυση του νερού σε συνθήκες υπό υδροστατική πίεση και έχει αποδειχθεί πως αποτελούν τα πλέον αποτελεσματικά προϊόντα PRAH, ενώ πλεονεκτούν έναντι των υδρόφοβων πολυμερών που βασίζονται σε άλλους μηχανισμούς ή μεθόδους συσσωμάτωσης των πολυμερών, ή άλλα υλικά πληρώσεως για σφράγιση ρηγματώσεων, μακροχρόνια αποτελεσματικότητα, αυξημένη ανθεκτικότητα της κατασκευής σκυροδέματος, κ.λπ. Τέλος, έχουν την ικανότητα γεφύρωσης ρηγματώσεων που σχηματίζονται λόγω θερμικής ή μηχανικής δράσης. Επομένως, προκύπτει πως μόνο τα κρυσταλλικά πρόσμικτα μπορούν να κατηγοριοποιηθούν εξ'ολοκλήρου ως προϊόντα PRAHs. Όπως περιγράφεται και στον Πίνακα στη σελίδα 2 της Αναφοράς ACI 212.3R-10 για τα πρόσμικτα («Πρόσμικτα, τα χαρακτηριστικά & η χρήση τους»), μόνο τα κρυσταλλικά υδρόφιλα πολυμερή (latex, υδατοδιαλυτά ή υγρά πολυμερή) μπορούν να χρησιμοποιηθούν σε συνθήκες υπό υδροστατική πίεση.

Πλεονεκτήματα των PRAH

Τα δραστικά συστατικά που περιέχονται στα κρυσταλλικά πρόσμικτα PRAH αντιδρούν με το νερό και τα σωματίδια τσιμέντου στο σκυρόδεμα, με σκοπό να αυξηθεί η πυκνότητα των σωματιδίων ένυδρου πυριτικού ασβεστίου (CHS) ή/και να παραχθούν τα κατάλληλα σφαιριστικά πόρων, ώστε να επικαθίσουν στις υφιστάμενες μικρο-ρηγματώσεις και τα τριχοειδή με σκοπό την αντίσταση στη διείσδυση του νερού. Οι τριχοειδείς ρωγμές συνεχίζουν να σχηματίζονται καθ'όλη τη διάρκεια ζωής του σκυροδέματος, οπότε και τα κρυσταλλικά πρόσμικτα συνεχίζουν να ενεργοποιούνται παρουσία υγρασίας, σφραγίζοντας τα επιπλέον κενά.

Όπως αναφέρεται και στην Αναφορά του ACI «Η αντίσταση στην υδροστατική πίεση με τη χρήση των PRAH πραγματοποιείται με τη βοήθεια ενός μηχανισμού σφράγισης του πορώδους με τη βοήθεια ανάπτυξης κρυστάλλων, συσσωμάτωση πολυμερών, ή άλλων πληρωτικών υλικών, αν και η ικανότητα της αντίστασης σε υδροστατική πίεση θα εξαρτηθεί από το βαθμό πλήρωσης των πόρων και τη σταθερότητά τους σε υδροστατική πίεση». Η διάκριση θα πρέπει να γίνει με βάση την αποδεδειγμένη ικανότητα του μίγματος να μειώσει τη διείσδυση νερού υπό τις αναμενόμενες συνθήκες λειτουργίας». Ο μηχανισμός σφράγισης των πόρων βασίζεται στα ενεργά χημικά συστατικά που περιέχονται και έχουν αναμιχθεί με το μίγμα τσιμέντου/άμμου.

Επειδή τα πρόσμικτα PRAHs με μηχανισμό συσσωμάτωσης πολυμερών ή άλλων πληρωτικών ουσιών (fillers) δεν είναι ικανά να ανταπεξέλθουν στις υψηλές υδροστατικές πιέσεις, δεν μπορούν να κατηγοριοποιηθούν ως «πραγματικά» πρόσμικτα PRAHs. Ο μηχανισμός σφράγισης των πόρων με τη χρήση κρυσταλλικής βάσης PRAHs, βασίζεται στα ενεργά χημικά συστατικά που περιέχονται στο μίγμα με το τσιμέντο και την άμμο, τα οποία ανταποκρίνονται μόνιμα και πλήρως σε υγρασία και αλλάζει ακόμη και όταν εκτίθεται σε υψηλή υδροστατική πίεση και σε αλλαγές, ακόμα και όταν εκτίθεται σε υψηλές υδροστατικές πιέσεις.

Σε αντίθεση με τα υδρόφοβα υλικά – όπως τα πρόσμικτα PRAN που μελετήθηκαν ανωτέρω – τα κρυσταλλικά πρόσμικτα είναι υδρόφιλα και εναποτίθενται σε όλη την μάζα του σκυροδέματος, με αποτέλεσμα να γίνονται μόνιμο μέρος της μάζας του σκυροδέματος, όταν εκτίθενται σε νερό. Με τη βοήθεια των προσμίκτων PRAHs είναι περιττή η χρήση εξωτερικών στεγανωτικών μεμβρανών, ακόμα και για σκυρόδεμα που βρίσκεται υπό υψηλή υδροστατική πίεση.

Τεχνολογία PRAH της PENETRON®: Δοκιμές σε Συνθήκες Υψηλών Υδροστατικών Πίεσεων

Όμοια με την γενικότερη τεχνολογία που αφορά στη δράση των πρόσμικτων PRAH, όπως περιγράφεται ανωτέρω, τα ενεργά συστατικά του PENETRON ADMIX® αντιδρούν με τα παραπροϊόντα της ενυδάτωσης του σκυροδέματος, σε νέες κατασκευές σκυροδέματος. Βάσει αυτών των αντιδράσεων, μετά το στάδιο της υδρόλυσης, παράγονται μόρια ένυδρου πυριτικού ασβεστίου (CSH) και αδιάλυτοι κρύσταλλοι στη μήτρα του σκυροδέματος. Αυτοί οι αδιάλυτοι σχηματισμοί σφραγίζουν τους πόρους και τα τριχοειδή του σκυροδέματος, με σκοπό την δραματική μείωση της διαπερατότητας του σκυροδέματος.

Όταν το PENETRON ADMIX® προστίθεται τη στιγμή της παρασκευής της παρτίδας του σκυροδέματος, οι κρυσταλλικές διατάξεις που παράγονται σφραγίζουν μόνιμα τη μάζα του σκυροδέματος και τις τριχοειδείς ρηγματώσεις («τριχιάσματα») που σχηματίζονται καθ'όλη τη διάρκεια του σκυροδέματος.

Τα προϊόντα της PENETRON® έχουν μελετηθεί εκτενώς σε ανεξάρτητα εργαστήρια, σε συνθήκες κάτω από υψηλές υδροστατικές πιέσεις (συμπεριλαμβανομένων των προτύπων ASTM D5084, NBR 10.787/94, USAE CRD C48, BS EN 12390-8 και Υδατοπερατότητα κατά DIN 1048-5). Όπως παρατηρήθηκε σε αυτές τις μελέτες, οι κρυσταλλικές διατάξεις μειώνουν αποτελεσματικά τη διαπερατότητα των δειγμάτων από σκυρόδεμα, σε σχέση με τα «τυφλά» δείγματα, καθώς η διαρροή στα υπό μελέτη δείγματα που περιείχαν PENETRON ADMIX® είχε εξαλειφθεί, ακόμη και όταν αυτά εκτίθενται σε δοκιμές σε συνθήκες υψηλής υδροστατικής πίεσης.

Τα παρακάτω παραδείγματα παρουσιάζουν τα πλεονεκτήματα και την βελτίωση του σκυροδέματος λόγω των αντιδράσεων των ενεργών συστατικών του PENETRON ADMIX® που οδηγούν σε μείωση της διαπερατότητας, υπό συνθήκες υψηλής υδροστατικής πίεσης.

Δοκιμή Διείσδυσης Νερού Υπό Πίεση – NBR 10.787/94


Υδροστατική Πίεση 700 kPa (101,5 psi)

Μετά την έκθεση των 4 εβδομάδων σε υδροστατική πίεση 700 kPa (περ. 70 m ύψους στήλης νερού), οι κρυσταλλικοί σχηματισμοί από τις αντιδράσεις των ενεργών συστατικών του συστήματος PENETRON® είχαν μειώσει την διαπερατότητα του σκυροδέματος και σχεδόν εξ'ολοκλήρου εξαλείψει κάθε διαρροή.

Η ΔΙΑΦΟΡΑ ΤΟΥ ΣΥΣΤΗΜΑΤΟΣ PENETRON®



MSZ EN 12390-8:2009 (DIN 1048)

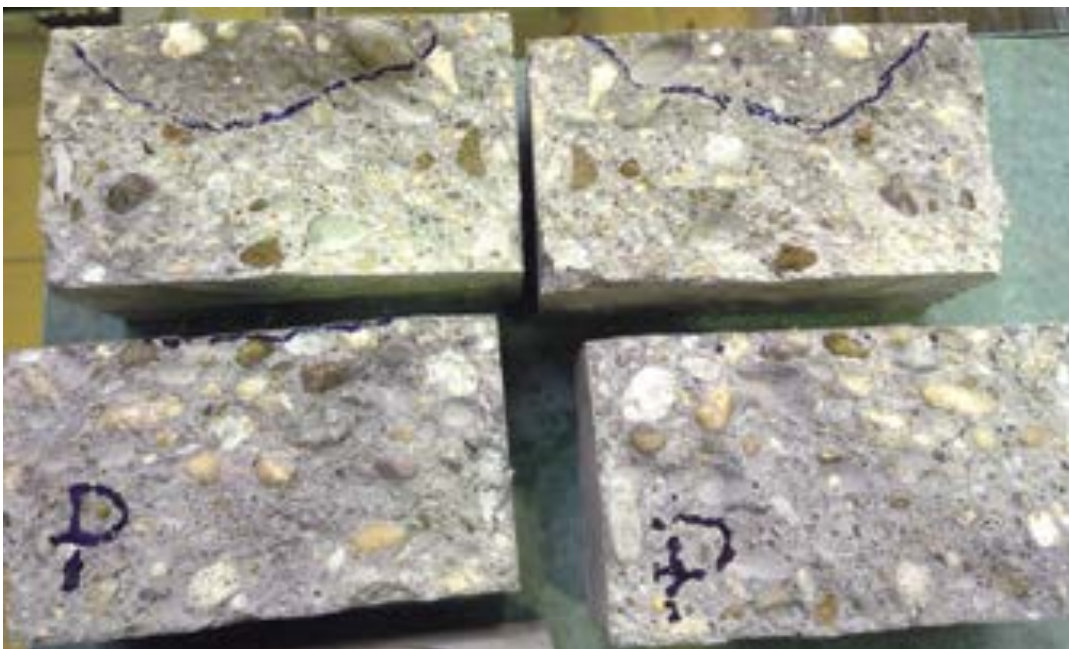

Η ΔΙΑΦΟΡΑ ΤΟΥ ΣΥΣΤΗΜΑΤΟΣ PENETRON®

Παραπάνω παρουσιάζονται δείγματα που έχουν επεξεργαστεί με το PENETRON ADMIX® (φέρουν τη σήμανση P) και δύο «τυφλά» δείγματα. Όλα τα δείγματα βρίσκονταν εκτεθειμένα σε υδροστατική πίεση 500 KPa (72,5 psi) για 72 ώρες. Αυτή η φωτογραφία τραβήχτηκε αμέσως μετά τη θραύση των δειγμάτων στη μέση, ώστε να μετρηθεί το βάθος διείσδυσης νερού. Τα δείγματα που είχαν επεξεργαστεί με το PENETRON ADMIX® παρουσίασαν μείωση της διαπερατότητας της τάξης του 94,4%, σε σχέση με τα «τυφλά» δείγματα.

Πρόσφατα Έργα με πρόσμικτα PRAH της PENETRON®

Η δυνατότητα της τεχνολογίας των προϊόντων PENETRON® για αποτελεσματική μείωση της διαπερατότητας έχει αποδειχθεί μέσα από εφαρμογές σε απαιτητικές συνθήκες υπό υψηλές υδροστατικές πιέσεις, με την μεγαλύτερη δυνατή επιτυχία. Αρκετά πρόσφατα έργα που τονίζουν την αποτελεσματικότητα των πρόσμικτων της PENETRON® για μείωση της διαπερατότητας σε συνθήκες υπό υψηλές υδροστατικές πιέσεις είναι:

- Αγωγός ανύψωσης λυμάτων *South Cobb Tunnel Lift Station* κοντά στην Ατλάντα, Πολιτεία Γεωργία, ΗΠΑ
- *Tower Street Reservoir* – μία δεξαμενή αποταμίευσης 8.000 γαλονιών (30 m³) στο Harrisonburg, Πολιτεία Βιρτζίνια, ΗΠΑ
- Σήραγγα Εθνικού Ποδηλατόδρομου *National Road Bikeway Tunnel* κοντά στο St. Clairsville, Πολιτεία Οχάιο
- Αεροδρόμιο Σιγκαπούρης *Singapore Airport – Terminal 3*, Σιγκαπούρη
- *Gardens by the Bay, Marina Bay*, Σιγκαπούρη
- *Corredor Duarte*, Σάντο Ντομίνγκο, Δομινικανή Δημοκρατία
- Διεθνές Αεροδρόμιο *Chennai International Airport*, Ινδία

**South Cobb Tunnel Lift Station**

Η κατασκευή περιλαμβάνει έναν αγωγό 65 m βάθος για την ανύψωση λυμάτων από πάνω από 32.000 LF σήραγγες στο Cobb County, της Πολιτείας Γεωργία, ΗΠΑ. Σε αυτό το αξιοσημείωτο βάθος, ο σχεδιασμός – «υγρός» αγωγός μέσα σε «ξηρό» αγωγό - απαιτεί η διαπερατότητα του σκυροδέματος να είναι εξαιρετικά χαμηλή για να εξαλειφθούν όλα τα προβλήματα διαρροής λυμάτων από τον «υγρό» αγωγό στο «ξηρό» αγωγό (που χρησιμοποιείται από το προσωπικό συντήρησης). Η πίεση του νερού του εδάφους στα 65 m βάθος, καθώς και τα σπασμένα και θριματισμένα τμήματα του βραχώδους υποστρώματος, αποτελούσαν τις κύριες ανησυχίες


στεγανοποίησης. Το πρόσμικτο PENETRON ADMIX® κατηγοριοποιήθηκε ως PRAH για αυτό το έργο, καθώς πάνω από 15.000 m³ αντιμετωπίστηκαν και στεγανοποιήθηκαν επιτυχώς.

Tower Street Reservoir

Η νέα δεξαμενή συγκράτησης νερού, 30.000 m³ σκυροδέματος, στην πόλη Harrisonburg, Πολιτεία Βιρτζίνια, αντικατέστησε την προηγούμενη υπόγεια δεξαμενή με επένδυση σκυροδέματος, που παρουσίαζε σοβαρά προβλήματα διαρροών νερού. Η νέα δεξαμενή, χτισμένη από την εταιρεία Crom Corporation, περιέχει τα πλεονεκτήματα όσον αφορά στη μείωση της διαπερατότητας με την τεχνολογία ανάπτυξης κρυστάλλων του συστήματος PENETRON®, καθώς η κατασκευή της νέας δεξαμενής εισήγαγε και την εφαρμογή του συστήματος Ενισχυμένου Εκτοξευόμενου Σκυροδέματος με PENETRON ADMIX® (PENETRON ADMIX® Enhanced Shotcrete – PAES), για την προστασία του οπλισμού ενίσχυσης και για να εξαλείψει κάθε πιθανότητα διαρροής νερού από την κατασκευή, ύψους 21 m. Η ικανότητα του πρόσμικτου PENETRON ADMIX® να μειώνει την υδατοπερατότητα, ακόμα και κάτω από υψηλές υδροστατικές πιέσεις, βελτίωσε το σύστημα διανομής νερού της πόλης Harrisonburg, με την εξάλειψη των διαρροών νερού.

**National Road Bikeway Tunnel Rehabilitation**

Η σήραγγα του Εθνικού Ποδηλατοδρόμου, ηλικίας άνω των 100 ετών, μαστιζόταν από προβλήματα διείσδυσης υπόγειων υδάτων και ζημιών. Η κατασκευή χτίστηκε το 1902 σε μία περιοχή που χαρακτηρίζεται από ένα λεπτό στρώμα από ελαφρώς πορώδη και χαμηλών αντοχών σχιστόλιθο, με σημαντικές εισροές υπογείων υδάτων, ενώ ο κύριος στόχος του έργου αποκατάστασης ήταν ο έλεγχος της διείσδυσης του νερού και της επακόλουθης συγκέντρωσης πάγου και δημιουργίας αστοχιών. Η ικανότητα της τεχνολογίας PENETRON® για μείωση της διαπερατότητας της νέας επένδυσης από εκτοξευόμενο σκυρόδεμα, ακόμη και έναντι υψηλής υδροστατικής πίεσης, ξεπέρασε τις προσδοκίες της ομάδας σχεδιασμού του έργου. Το πρόβλημα του πάγου και της διείσδυσης του νερού έχει εξαλειφθεί εξ'ολοκλήρου.

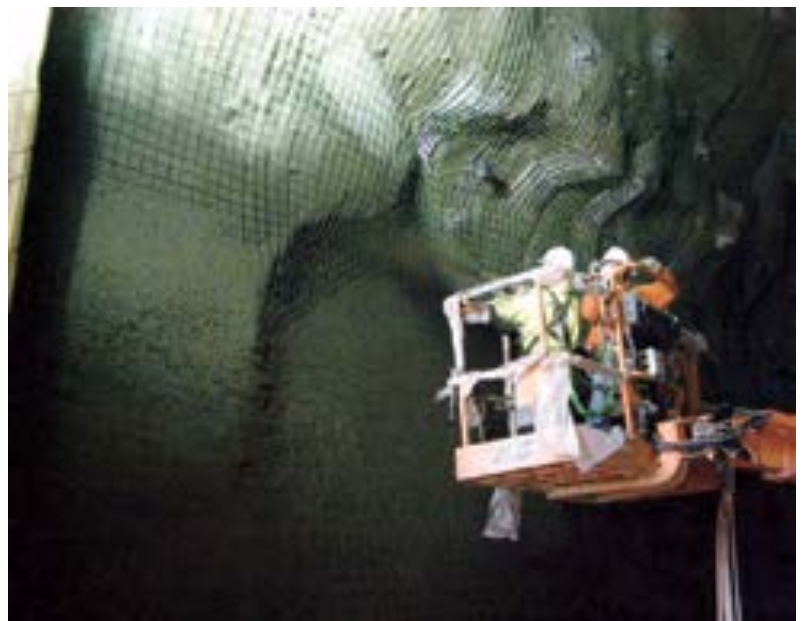

Singapore Changi Airport /Terminal 3

Το Αεροδρόμιο Changi, πέραν της λειτουργίας του ως κόμβος αεροπορικών μεταφορών, αποτελεί και ένα σύμβολο εθνικής υπερηφάνειας και ορόσημο της ποιότητας παροχής υπηρεσιών. Ο Τερματισμός Σταθμός (Terminal) 3 διαθέτει πρωτοποριακές εγκαταστάσεις για τους επιβάτες και μοντέρνα αρχιτεκτονική. Συνολικά, έγινε επεξεργασία 140.000 m³ σκυροδέματος με το πρόσμικτο PENETRON ADMIX®, το επαλειπτικό PENETRON® και το επισκευαστικό κονίαμα PENECEM MORTAR™.

Gardens by the Bay, Marina Bay

Οι διακριτοί αυτοί παραθαλάσσιοι κήποι αποτελούν ένα χώρο «εκπαίδευσης & ψυχαγωγίας», ανθεκτικό σε κάθε είδος καιρού, ένα ορόσημο αρχιτεκτονικής και γεωπονικής, καθώς και ένα αξιοθέατο βιώσιμης ανάπτυξης και ενεργειακής τεχνολογίας. Η κατασκευή περιλαμβάνει μεγάλης χωρητικότητας κλιματιζόμενους χώρους, με σκοπό την αναπαραγωγή συγκεκριμένων κλιματικών συνθηκών, ώστε να στεγάσει το ασυνήθιστο εύρος φυτών και λουλουδιών. Το έργο παρουσίασε σοβαρές προκλήσεις στεγανοποίησης, καθώς είναι χτισμένο εξ'ολοκλήρου σε επιχωματωμένη περιοχή και βρίσκεται ακριβώς δίπλα στον ωκεανό. Η σκυροδέτηση αφορούσε 18.300 m³ σκυροδέματος, πλάκα βάσης και τα τοιχεία, με το πρόσμικτο PENETRON ADMIX®. Επίσης, έγινε εφαρμογή του υδροδιογκούμενου κορδονιού PENESEAL™ SW 55 στους αρμούς διακοπής σκυροδέτησης και του PENESEAL PRO™ RTU στα τοιχεία.



Corredor Duarte

Η σήραγγα Corredor Duarte Tunnel αποτελεί τη νεότερη σήραγγα της Δομινικανής Δημοκρατίας και συμβάλλει στην ταχεία σύνδεση του Σάντο Ντομίνγκο με την υπόλοιπη χώρα. Η σήραγγα έχει περίπου 1.200 m σε μήκος και διαδραματίζει καίριο ρόλο στην ανακούφιση της χρόνιας κυκλοφοριακής συμφόρησης στην περιοχή της πρωτεύουσας. Αμέσως μετά από το μηχάνημα διάνοιξης σηράγγων, ακολούθησε η εφαρμογή ενός



πολύ λεπτού στρώματος εκτοξευόμενου σκυροδέματος, δημιουργώντας ένα φυσικό δακτυλίδι ως φέροντα οργανισμό και ελαχιστοποιώντας την παραμόρφωση των γύρω στρωμάτων του βράχου. Το PENETRON ADMIX® χρησιμοποιήθηκε για μείωση της διαπερατότητας των τοιχωμάτων εκτοξευόμενου σκυροδέματος, ενώ τα υδροδιογκούμενα κορδόνια PENEBAR™ SW 55 χρησιμοποιήθηκαν για τη σφράγιση των κατασκευαστικών αρμών. Συνολικά, χρησιμοποιήθηκαν 45 τόνοι PENETRON ADMIX® και 2.300 m PENEBAR™ SW 55.

Chennai International Airport

Το Διεθνές Αεροδρόμιο Chennai διεύρυνε και εκσυγχρόνισε το διεθνή τερματικό σταθμό, ώστε να πληροί τις νέες υψηλότερες απαιτήσεις και προστέθηκαν ένας νέος τερματικός σταθμός εγχώριων επιβατών, ένας πολυεπίπεδος χώρος στάθμευσης αυτοκινήτων και ένας παράλληλος αυτοκινητόδρομος ταχείας κυκλοφορίας για την αύξηση της ικανότητας σε 16 εκατομμύρια επιβάτες το χρόνο. Όλα τα στοιχεία σκυροδέματος και οι αρμοί διακοπής του υπογείου (10 m βάθος)



απαιτούσαν απόλυτη στεγανοποίηση, καθώς η κατασκευή του αεροδρομίου βρίσκεται δίπλα στον Κόλπο της Βεγγάλης και το ύψος των υπόγειων υδάτων παρουσιάζει περιοδική διακύμανση (-10 m το καλοκαίρι και -3 m κατά την περίοδο των μουσώνων). Συνολικά, έγινε χρήση 125 τόνων PENETRON ADMIX® στις πλάκες του υπογείου και στα τοιχεία αντιστήριξης, ενώ παράλληλα χρησιμοποιήθηκαν 15.000 m των υδροδιογκούμενων κορδονιών PENEBAR™ SW 45 RAPID, ώστε να αποτρέψουν τη διείσδυση του νερού, μέσω των αρμών διακοπής σκυροδέτησης.

PENETRON ADMIX[®]
ΤΟ ΜΟΝΟ ΚΡΥΣΤΑΛΛΙΚΟ ΠΡΟΣΜΙΚΤΟ (PRAH)
3^{ΗΣ} ΓΕΝΙΑΣ, ΣΤΟΝ ΚΟΣΜΟ



Μίγμα δραστικών συστατικών, σε μορφή σκόνης, που προστίθεται στο σκυρόδεμα για να σχηματιστούν αδιάλυτες κρυσταλλικές δομές. Οι κρύσταλλοι σχηματίζονται βαθιά, στη μάζα του σκυροδέματος, σφραγίζοντας τους πόρους, τα τριχοειδή και τις ρηγματώσεις λόγω συρρίκνωσης, ενάντια στη διείσδυση του νερού.

ΤΟ ΣΥΣΤΗΜΑ PENETRON

Χρήσεις:

- Δεξαμενές πόσιμου νερού
- Δεξαμενές επεξεργασίας νερού και αποβλήτων
- Ενυδρεία
- Σήραγγες
- Θεμέλια
- Φρεάτια ανελκυστήρων
- Υπόγειοι χώροι φύλαξης
- Βιομηχανικές εγκαταστάσεις
- Χώροι στάθμευσης
- Έργα οδοποιίας και γέφυρες
- Πλάκες από σκυρόδεμα
- Διαχωριστικοί τοίχοι
- Υπόγεια
- Οροφές από σκυρόδεμα
- Μπάνια
- Για οποιαδήποτε κατασκευή από σκυρόδεμα που απαιτεί προστασία από νερό ή χημική προσβολή.

PENETRON[®]

Χρησιμοποιείται για στεγανοποίηση και χημική προστασία σκυροδέματος κάτω από την επιφάνεια του εδάφους. Εφαρμόζεται σε μορφή αραιού μίγματος

**PENECRETE
MORTAR[®]**

Χρησιμοποιείται για την στεγανή επισκευή και γέμισμα σε ρωγμές, αρμούς διακοπής σκυροδέτησης, φωλεές και ατέλειες του σκυροδέματος σε μορφή πάστας κονιάματος

**PENETRON
ADMIX[®]**

Ένα πρόσμικτο σε μορφή σκόνης που αναμιγνύεται σε καινούργιο σκυρόδεμα την στιγμή της παραγωγής του, ή αφού αναμιχθεί προηγουμένως με νερό μέσα στην βαρέλα μεταφοράς σκυροδέματος για την πλήρη στεγάνωσή του.

**PENETRON[®]
PLUS**

Τσιμεντοειδές μίγμα με χαλαζιακά αδρανή που χρησιμοποιείται για την στεγάνωση και σκλήρυνση οριζόντιων επιφανειών από νωπό σκυρόδεμα που θα ελικοπερωθούν ή θα επεξεργαστούν με μύστρα

PENEPLUG[®]

Σχηματίζει ένα μίγμα ταχείας πήξης, ικανό να σταματήσει διαρροή νερού υπό πίεση

**PENETRON[®]
INJECT**

Ένα προηγμένης τεχνολογίας, δύο συστατικών, κρυσταλλικής βάσης, σφραγιστικό ένεμα, που στεγανοποιεί το σκυρόδεμα, γεμίζοντας και σφραγίζοντας σε βάθος εσωτερικά κενά, ρωγμές και σχισμές

ΚΥΡΙΑ ΧΑΡΑΚΤΗΡΙΣΤΙΚΑ



Μόνιμα στεγνό σκυρόδεμα

Αυτο-επούλωση καθ'όλη
τη διάρκεια ζωής λειτουργίας

Ευέλικτο, μπορεί να εφαρμοστεί με
διαφορετικούς τρόπους


Δεν υπάρχουν γνωστές ασυμβατότητες με
πρόσμικτα εργασιμότητας

Μη τοξικό


Προστατεύει ενάντια σε χημική προσβολή
(pH 3-11)

ΠΩΣ ΔΟΥΛΕΥΕΙ ΤΟ PENETRON ADMIX® ;




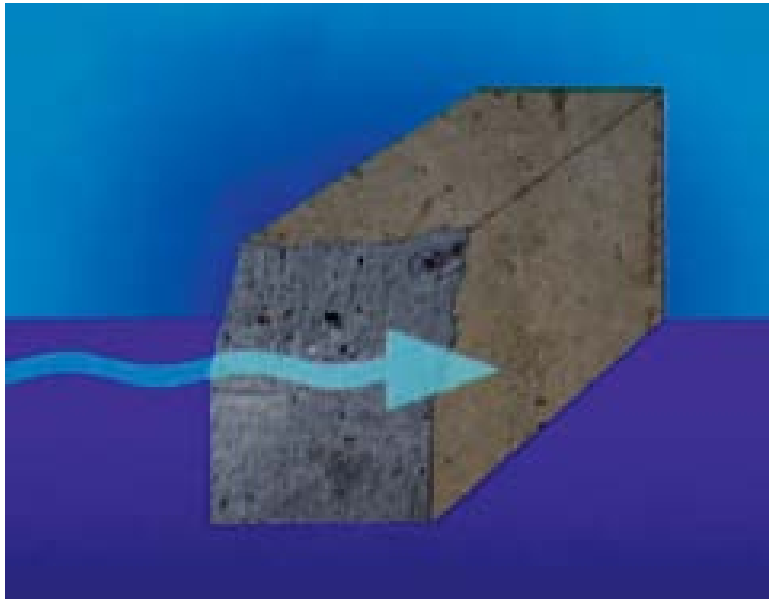


Ένα συμβατικό σκυρόδεμα περιέχει πλήθος μικρο-ρωγμών, πόρους και τριχοειδή, μέσω των οποίων το νερό εισέρχεται στο σκυρόδεμα

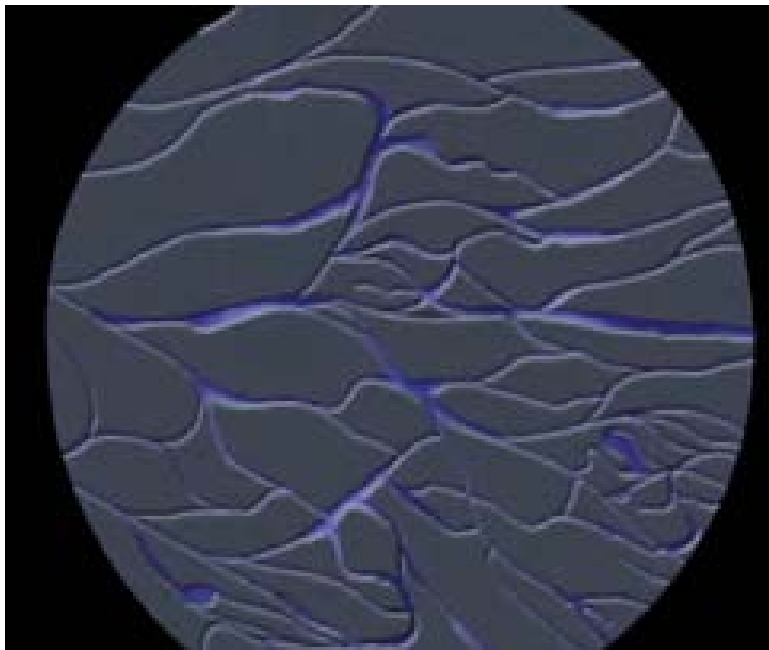


Το νερό περνά μέσα από τις μικρο-ρωγμές και τα τριχοειδή αγγεία στο σκυρόδεμα

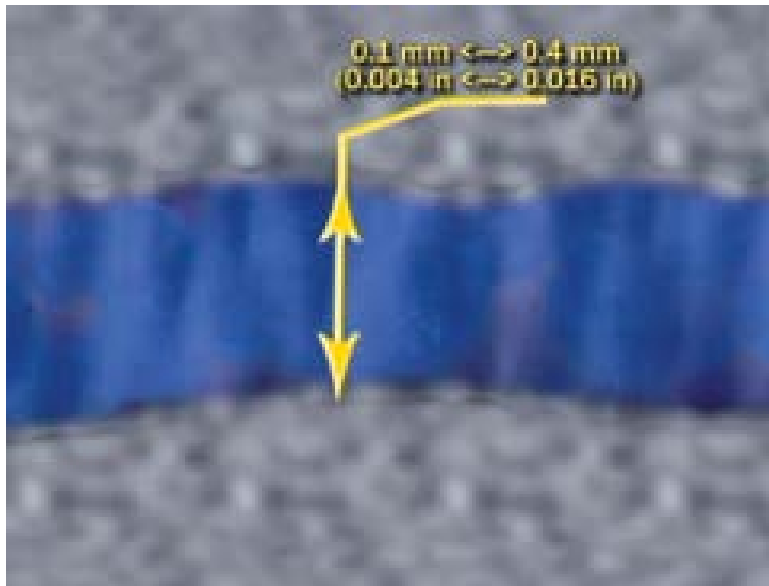


Αυτοί οι πόροι έχουν τυπικά ένα πλάτος μεταξύ 0,1 - 0,4 mm

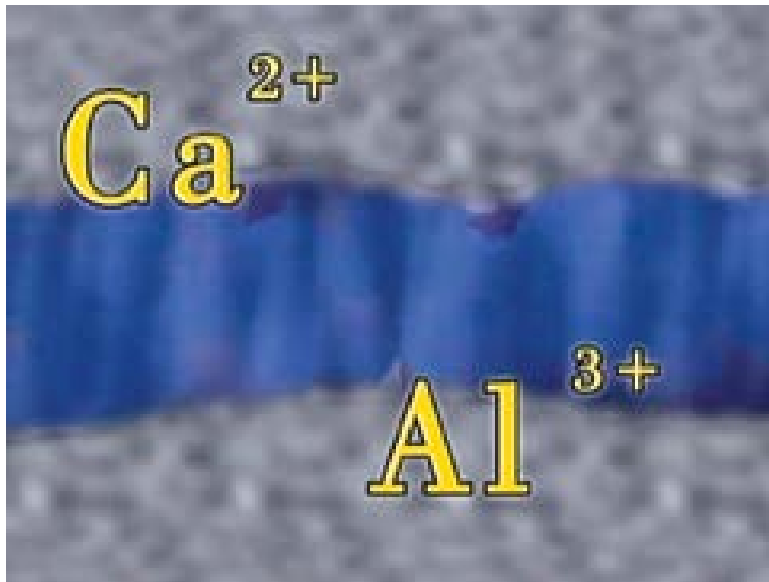


Όταν PENETRON ADMIX® προστίθεται στο σκυρόδεμα, τα κρυσταλλικά συστατικά αντιδρούν με το νερό, τα υδροξείδια ασβεστίου και αργιλίου, καθώς και διάφορα άλλα μεταλλικά οξείδια και άλατα που περιέχονται στο σκυρόδεμα

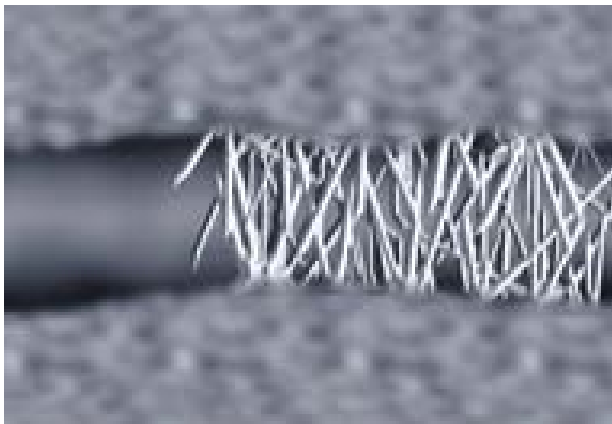

Η χημική αντίδραση που ακολουθεί προκαλεί αυτά τα κενά και τις ρηγματώσεις να γεμίσουν με αδιάλυτους κρυστάλλους

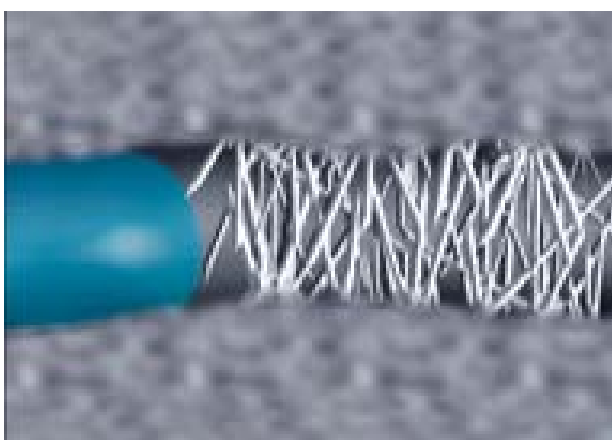

Το νερό δεν μπορεί να περάσει μέσα από αυτές τις κρυσταλλικές δομές και ως εκ τούτου το σκυρόδεμα γίνεται μη διαπερατό

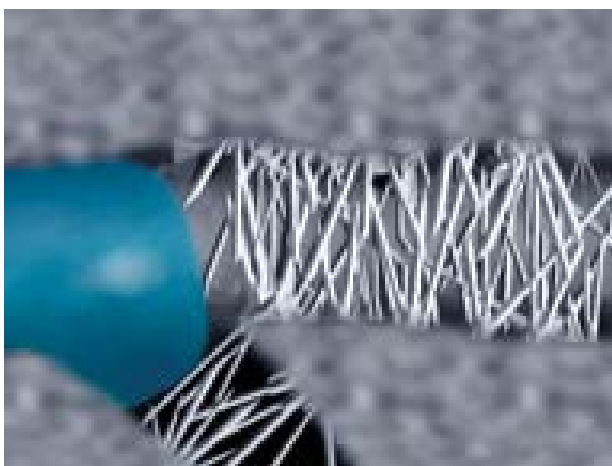

Σε περίπτωση που εμφανιστούν νέες ρωγμές σε όλη τη διάρκεια της ζωής του σκυροδέματος, οι κρύσταλλοι θα δημιουργούνται σε αυτές τις ρωγμές, εμποδίζοντας το νερό να βρει νέες διόδους για να περάσει



**Το αποτέλεσμα είναι μια εντελώς
στεγνή και ανθεκτική δομή σκυροδέματος**



Διείσδυση νερού υπό πίεση– NBR 10.787/94 (Απρίλιος 2007)

Σκυρόδεμα: CII-E 32

στο

IPT (Technological Research Institute of São Paulo State), Βραζιλία

Διείσδυση νερού υπό πίεση – NBR 10.787/94 (Απρίλιος 2007)

Σκυρόδεμα: CII-E 32

Εφαρμοσμένη πίεση νερού:

- 1^η και 2^η μέρα: 0,1 MPa
- 3^η μέρα: 0,3 MPa
- 4^η έως 7^η μέρα: 0,7 MPa

Στοιχεία	Χαρακτηριστικά
Συγκέντρωση τσιμέντου CII-E32	350 kg/m ³
Θλιπτική αντοχή	20 MPa
Ψιλή άμμος	388 kg/m ³
Χονδρόκοκκα αδρανή 0	421 kg/m ³
Χονδρόκοκκα αδρανή 1	632 kg/m ³
Νερό	192 kg/m ³
Υπερρευστοποιητής	0,3% έως 0,4% / m ³
Δοκιμή κάθισης	90±10 mm
Λόγος N/T	0,54
PENETRON ADMIX®	1% κατά βάρος τσιμέντου


**Διείσδυση νερού υπό πίεση – NBR
10.787/94 (Απρίλιος 2007)
Σκυρόδεμα: CII-E 32**




**Διείσδυση νερού υπό πίεση – NBR
10.787/94 (Απρίλιος 2007)
Σκυρόδεμα: CII-E 32**



**Διείσδυση νερού υπό πίεση – NBR
10.787/94 (Απρίλιος 2007)
Σκυρόδεμα: CII-E 32**

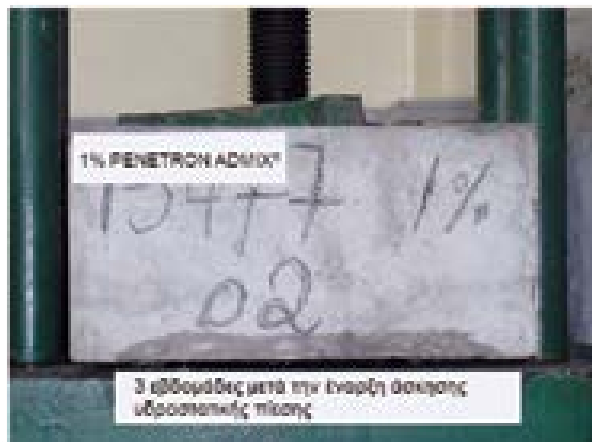

**Διείσδυση νερού υπό πίεση – NBR
10.787/94 (Απρίλιος 2007)
Σκυρόδεμα: CII-E 32**

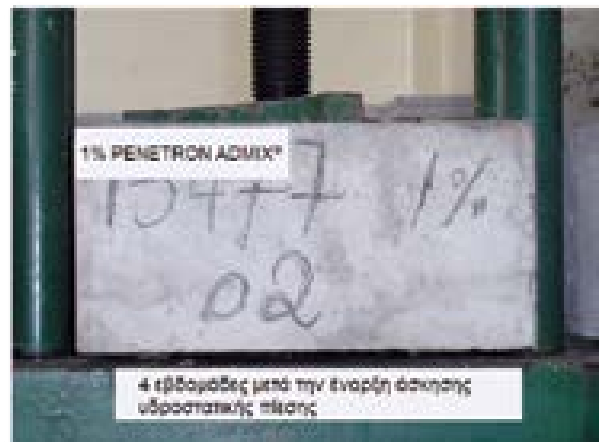

ΕΠΙΛΟΓΗ PRAH



Προϊόν 3^{ης} γενιάς που δεν έχει καμία αρνητική επίπτωση στον χρόνο πήξης και στην ανάπτυξη αντοχών του σκυροδέματος



Παρέχεται σε μορφή σκόνης και μπορεί να προστεθεί σε αναλογία 0,8 - 1% κατά βάρος του τσιμέντου στο μίγμα σκυροδέματος



Δεν υπάρχουν περιορισμοί στην αναλογία Νερού / Τσιμέντου



Έχει την ικανότητα αυτο-επούλωσης ρηγματώσεων έως 0,4 mm



Έχει μακροχρόνιες και σε παγκόσμιο επίπεδο επιδόσεις και έχει χρησιμοποιηθεί σε μεγάλα έργα

ΕΠΙΔΡΑΣΕΙΣ ΤΟΥ PENETRON ADMIX® ΚΑΤΑ ΤΗ ΔΙΑΡΚΕΙΑ ΖΩΗΣ ΤΟΥ ΣΚΥΡΟΔΕΜΑΤΟΣ

Μακροχρόνια μελέτη ανθεκτικότητας πάνω στην επίδραση του PENETRON ADMIX® σχετικά με τη διάρκεια ζωής του σκυροδέματος

Θλιπτική αντοχή

Συστολή ξήρανσης

Διαπερατότητα

Ικανότητα αυτο-επούλωσης

Μικροσκοπική εξέταση

Ανθεκτικό σε κύκλους
ψύξης/απόψυξης

Ανθεκτικό σε θειικά

Διάχυση χλωριώντων

Εκτίμηση ζωής λειτουργίας

ΕΠΙΔΡΑΣΕΙΣ ΤΟΥ PENETRON ADMIX® ΚΑΤΑ ΤΗ ΔΙΑΡΚΕΙΑ ΖΩΗΣ ΤΟΥ ΣΚΥΡΟΔΕΜΑΤΟΣ

**Δοκιμές και απαιτήσεις για την απόκτηση ανθεκτικού
σκυροδέματος υψηλής απόδοσης**

ΤΥΠΟΣ ΔΟΚΙΜΗΣ	ΙΔΙΟΤΗΤΑ	ΠΡΟΤΥΠΟ	ΑΠΑΙΤΗΣΕΙΣ
ΕΚΘΕΣΗ ΣΕ ΚΥΚΛΟΥΣ ΨΥΞΗΣ/ΑΠΟΨΥΞΗΣ	ΑΝΘΕΚΤΙΚΟ ΣΕ ΨΥΞΗ/ΑΠΟΨΥΞΗ	BS 5075-2 ή NCh 2185	≤ 0,05% ΑΛΛΑΓΗ ΣΤΟ ΜΗΚΟΣ ΛΟΓΩ ΔΙΑΣΤΟΛΗΣ
ΕΚΘΕΣΗ ΣΕ ΠΡΟΣΒΟΛΗ ΘΕΙΪΚΩΝ	ΔΙΑΣΤΟΛΗ ΛΟΓΩ ΕΚΘΕΣΗΣ ΣΕ ΘΕΙΪΚΑ	ASTM C1012-13 και ASTM C1157	≤ 0,05% ΑΛΛΑΓΗ ΣΤΟ ΜΗΚΟΣ ΛΟΓΩ ΔΙΑΣΤΟΛΗΣ ΣΤΟΥΣ 6 ΜΗΝΕΣ ΚΑΙ < 0,10% ΣΤΟΥΣ 12 ΜΗΝΕΣ
ΕΚΘΕΣΗ ΣΕ ΠΡΟΣΒΟΛΗ ΧΛΩΡΙΟΝΤΩΝ	ΔΙΑΧΥΣΗ ΧΛΩΡΙΟΝΤΩΝ	ASTM C1556-04	ΧΡΟΝΙΑ ΣΤΗ ΖΩΗ ΛΕΙΤΟΥΡΓΙΑΣ ΤΗΣ ΚΑΤΑΣΚΕΥΗΣ ΠΡΙΝ ΑΠΟ ΤΗΝ ΕΝΑΡΞΗ ΤΗΣ ΔΙΑΒΡΩΣΗΣ ΟΠΛΙΣΜΩΝ
ΜΗΧΑΝΙΚΗ ΑΝΤΙΣΤΑΣΗ	ΘΛΙΠΤΙΚΗ ΑΝΤΟΧΗ	NCh 1017 και NCh 1037	> 30 Μpa
ΑΛΛΑΓΕΣ ΣΤΟ ΜΗΚΟΣ ΛΟΓΩ ΞΗΡΑΝΣΗΣ	ΣΥΣΤΟΛΗ ΞΗΡΑΝΣΗΣ	NCh 2221	< 0,8 mm/m ανά 1 ΕΤΟΣ
ΔΙΑΠΕΡΑΤΟΤΗΤΑ	ΑΝΤΙΣΤΑΣΗ ΣΤΗ ΔΙΕΙΣΔΥΣΗ ΝΕΡΟΥ	DIN 1048	≤ 20 mm ΜΕΣΗ ΔΙΕΙΣΔΥΣΗ
ΤΡΙΧΟΕΙΔΗΣ ΑΠΟΡΡΟΦΗΣΗ	ΑΠΟΡΡΟΦΗΣΗ ΝΕΡΟΥ	ASTM C 1585, Manual DURAR CYTED.	ΕΠΙΚΑΛΥΨΗ 3 cm, ≤ 5·10 ⁻⁵ m/s ^{1/2} (ΕΠΙΘΕΤΙΚΟ ΠΕΡΙΒΑΛΛΟΝ)

ΕΠΙΔΡΑΣΕΙΣ ΤΟΥ PENETRON ADMIX® ΚΑΤΑ ΤΗ ΔΙΑΡΚΕΙΑ ΖΩΗΣ ΤΟΥ ΣΚΥΡΟΔΕΜΑΤΟΣ

Δοκιμή ιδιοτήτων σκυροδέματος

Θλιπτική αντοχή

Συστολή ξήρασης


Διαπερατότητα

Τριχοειδής απορρόφηση

Ικανότητα
αυτό-επούλωσης



Μικροσκοπική εξέταση

Θλιπτική Αντοχή

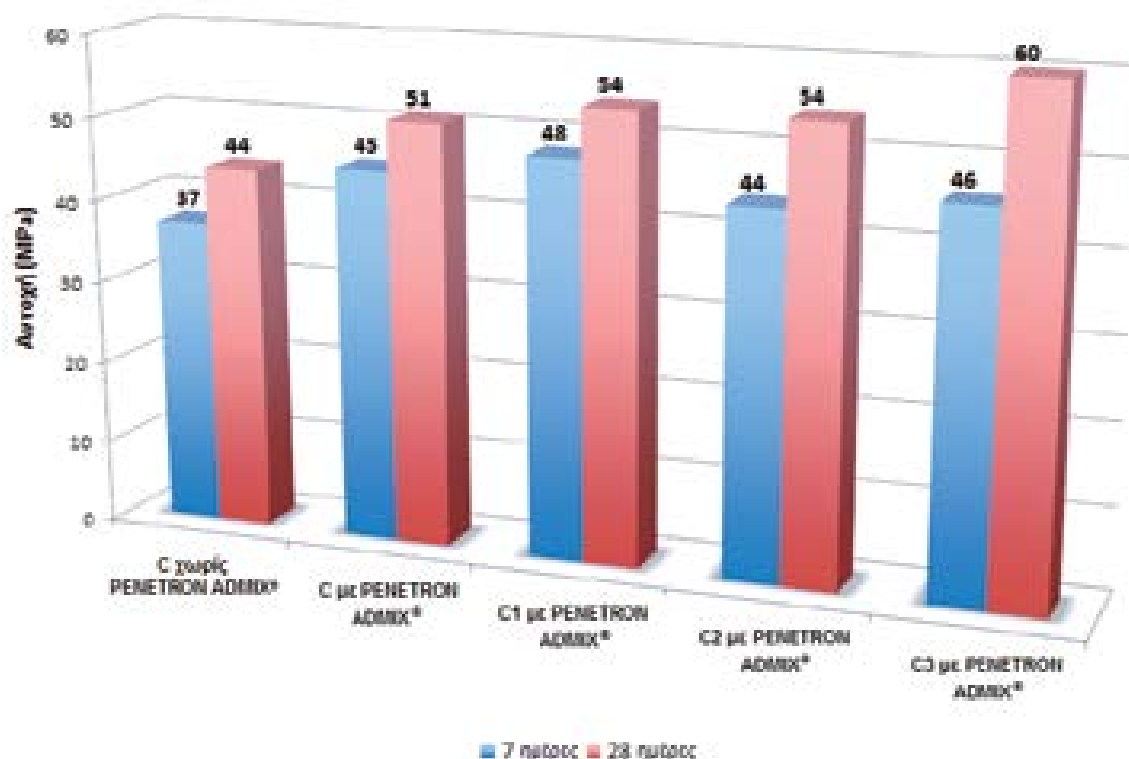


ΕΠΙΔΡΑΣΕΙΣ ΤΟΥ PENETRON ADMIX® ΚΑΤΑ ΤΗ ΔΙΑΡΚΕΙΑ ΖΩΗΣ ΤΟΥ ΣΚΥΡΟΔΕΜΑΤΟΣ

Συστολή Ξήρανσης

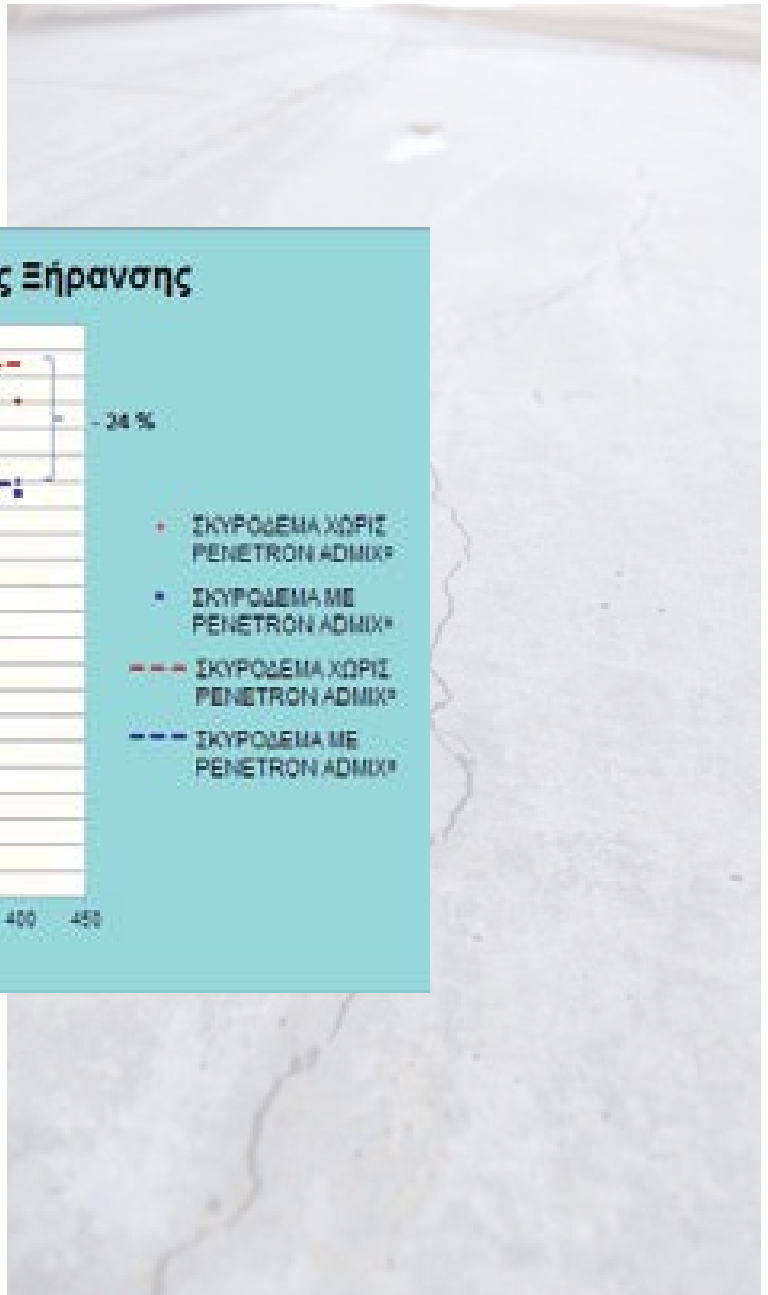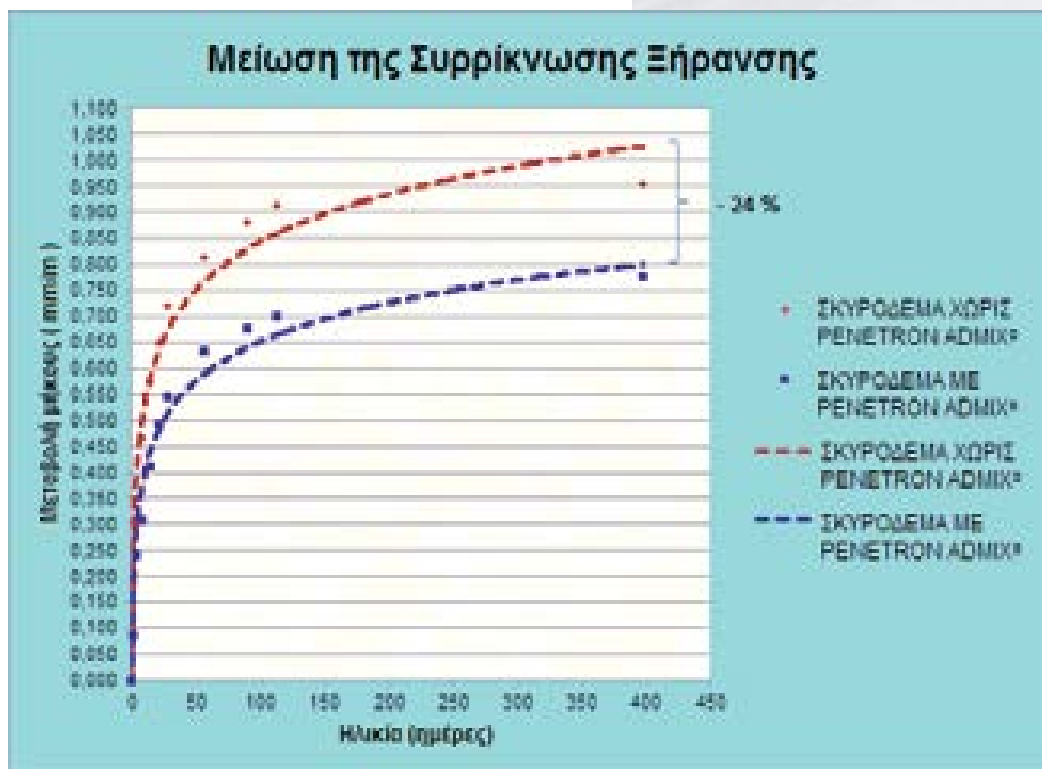

ΕΠΙΔΡΑΣΕΙΣ ΤΟΥ PENETRON ADMIX® ΚΑΤΑ ΤΗ ΔΙΑΡΚΕΙΑ ΖΩΗΣ ΤΟΥ ΣΚΥΡΟΔΕΜΑΤΟΣ


Διαπερατότητα

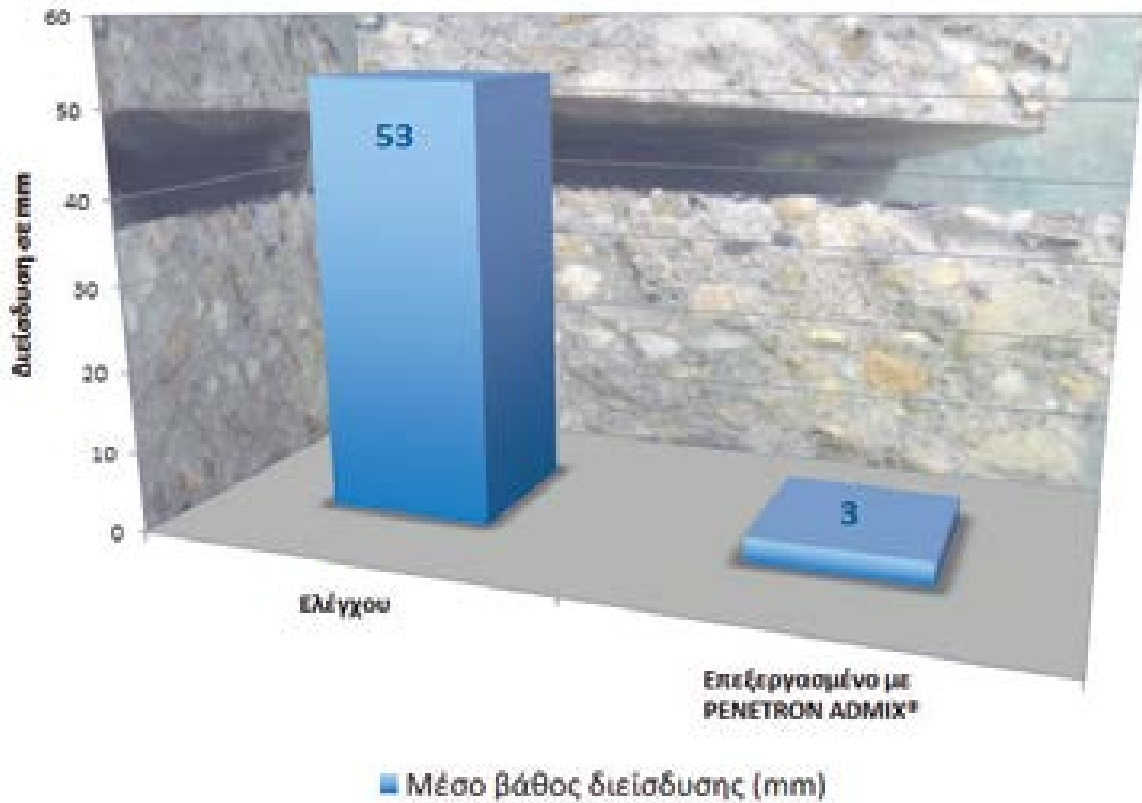

DIN 1048 equivalent (MSZ EN 12390-8:2009)


ΕΠΙΔΡΑΣΕΙΣ ΤΟΥ PENETRON ADMIX® ΚΑΤΑ ΤΗ ΔΙΑΡΚΕΙΑ ΖΩΗΣ ΤΟΥ ΣΚΥΡΟΔΕΜΑΤΟΣ

Τριχοειδής Απορρόφηση

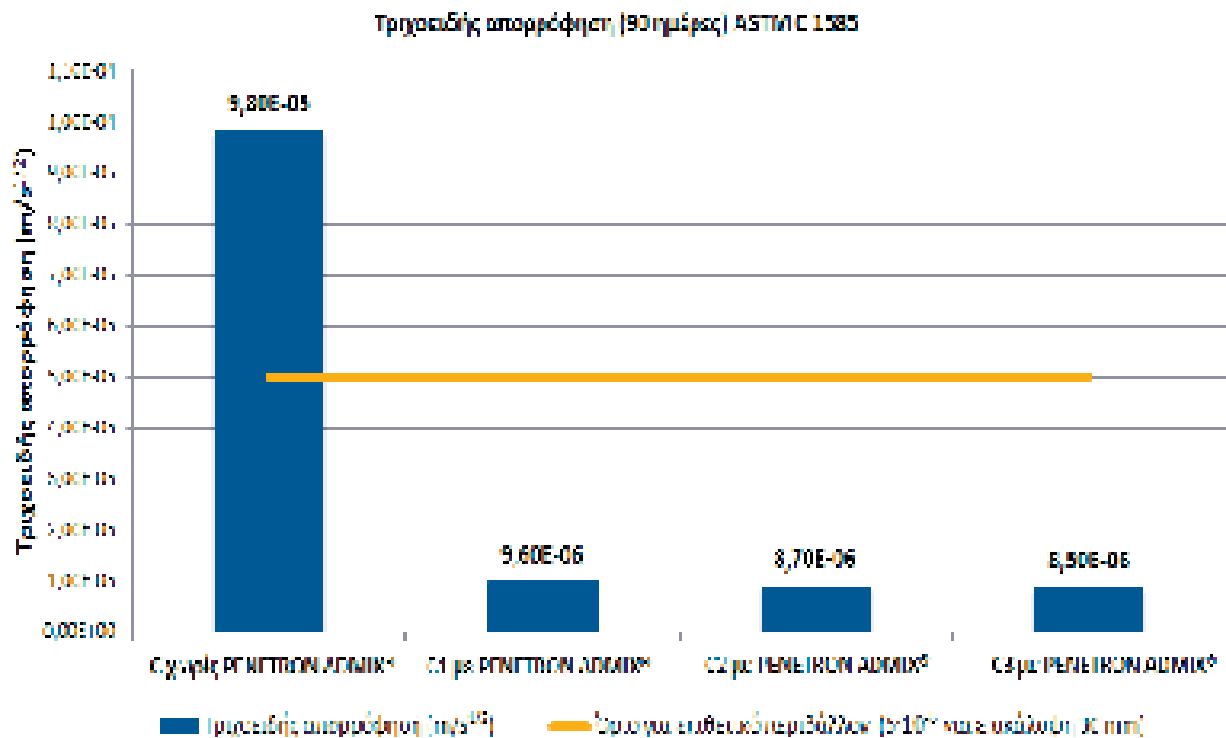


ΕΠΙΔΡΑΣΕΙΣ ΤΟΥ PENETRON ADMIX® ΚΑΤΑ ΤΗ ΔΙΑΡΚΕΙΑ ΖΩΗΣ ΤΟΥ ΣΚΥΡΟΔΕΜΑΤΟΣ

Ιδιότητες Αυτο-επούλωσης



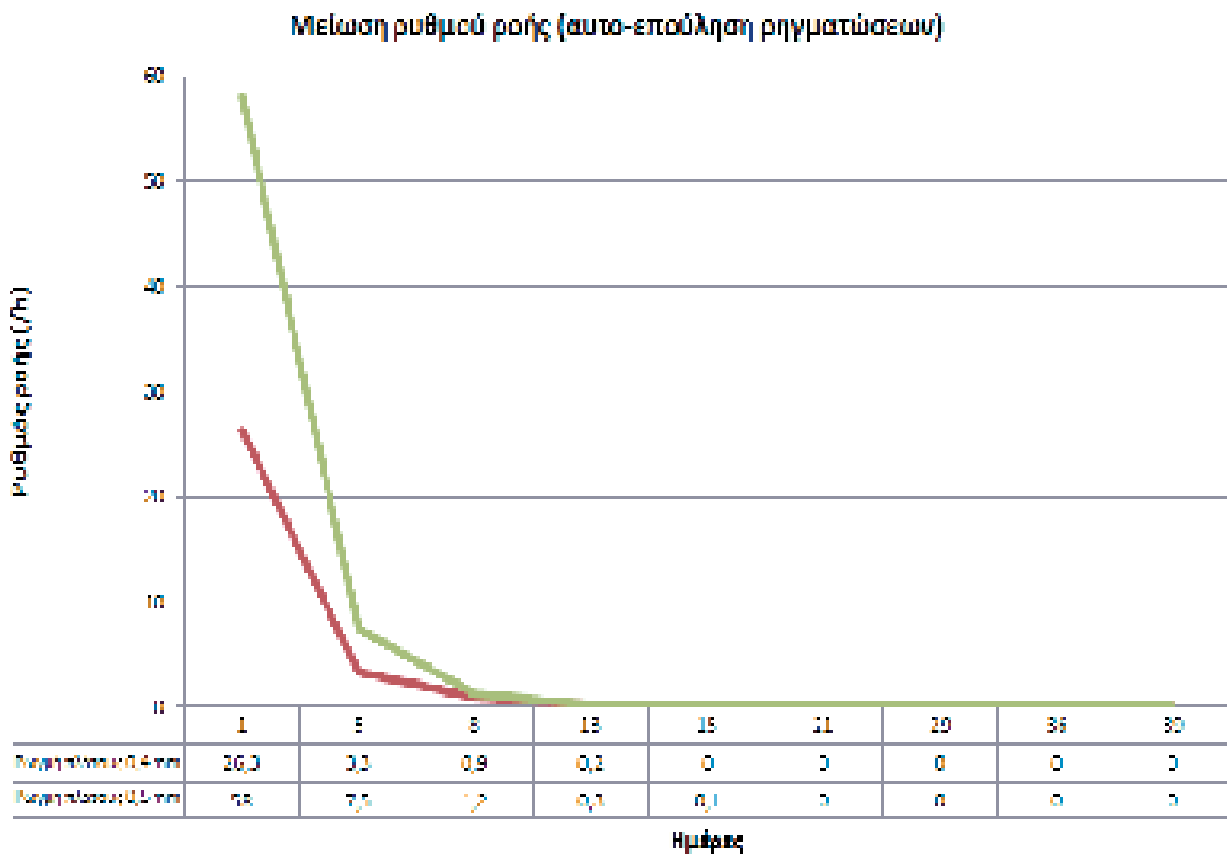


ΕΠΙΔΡΑΣΕΙΣ ΤΟΥ PENETRON ADMIX® ΚΑΤΑ ΤΗ ΔΙΑΡΚΕΙΑ ΖΩΗΣ ΤΟΥ ΣΚΥΡΟΔΕΜΑΤΟΣ

Μικροσκοπική Εξέταση

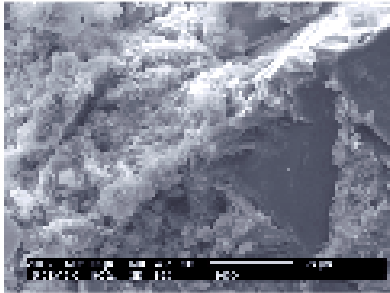

Δείγμα ελέγχου

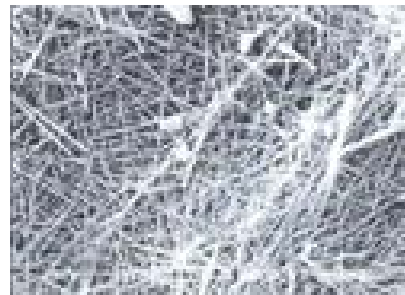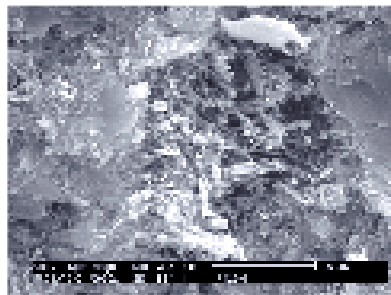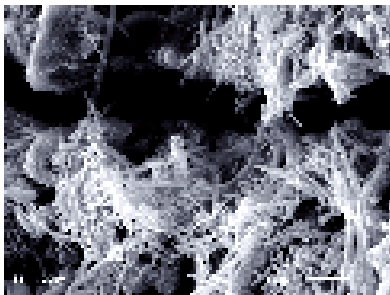


Σκυρόδεμα με PENETRON ADMIX®

ΕΠΙΔΡΑΣΕΙΣ ΤΟΥ PENETRON ADMIX® ΚΑΤΑ ΤΗ ΔΙΑΡΚΕΙΑ ΖΩΗΣ ΤΟΥ ΣΚΥΡΟΔΕΜΑΤΟΣ

Διαδικασία υποβάθμισης που προκαλείται από προσβολή από θειικά



Έκθεση σε Θειικά

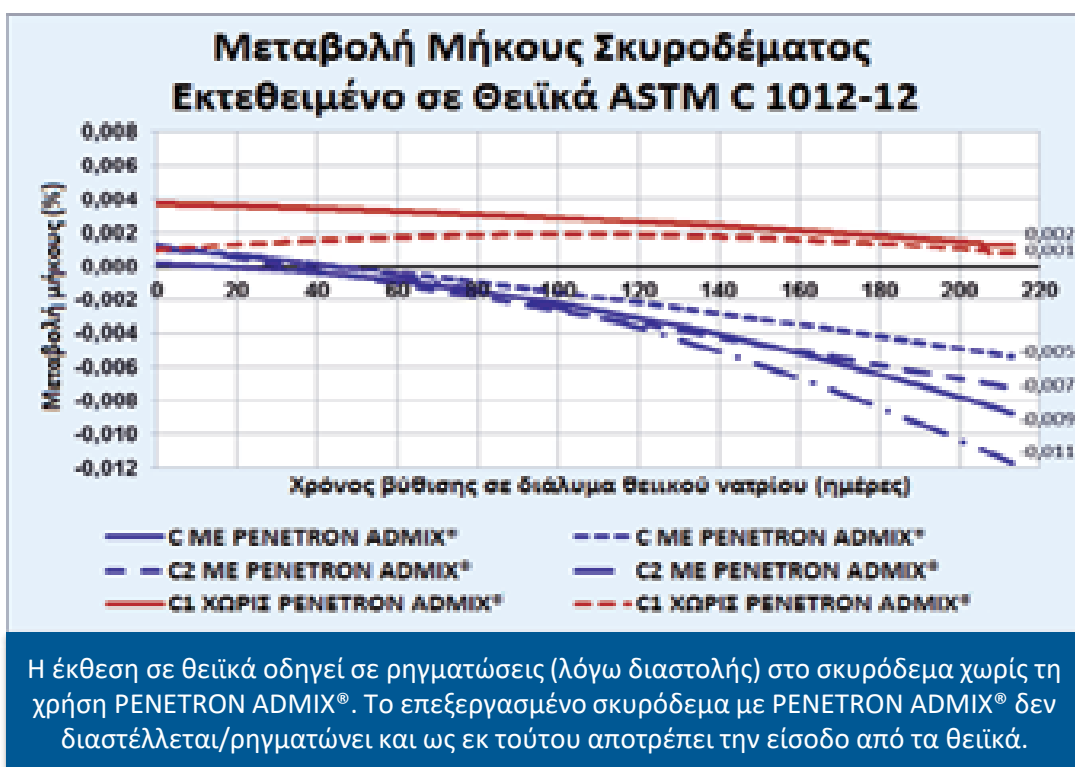


ΕΠΙΔΡΑΣΕΙΣ ΤΟΥ PENETRON ADMIX® ΚΑΤΑ ΤΗ ΔΙΑΡΚΕΙΑ ΖΩΗΣ ΤΟΥ ΣΚΥΡΟΔΕΜΑΤΟΣ

Διαδικασία υποβάθμισης που προκαλείται
από προσβολή κύκλους ψύξης/απόψυξης




Έκθεση σε Κύκλους Ψύξης/Απόψυξης

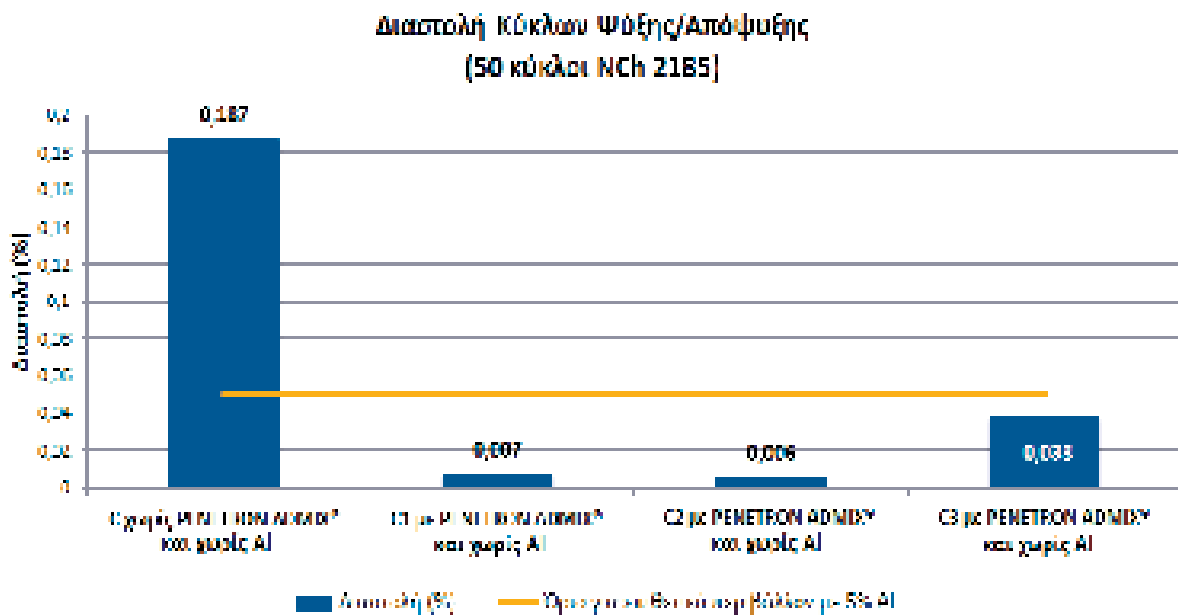

ΕΠΙΔΡΑΣΕΙΣ ΤΟΥ PENETRON ADMIX® ΚΑΤΑ ΤΗ ΔΙΑΡΚΕΙΑ ΖΩΗΣ ΤΟΥ ΣΚΥΡΟΔΕΜΑΤΟΣ

Διαδικασία υποβάθμισης που προκαλείται από διάχυση χλωριόντων

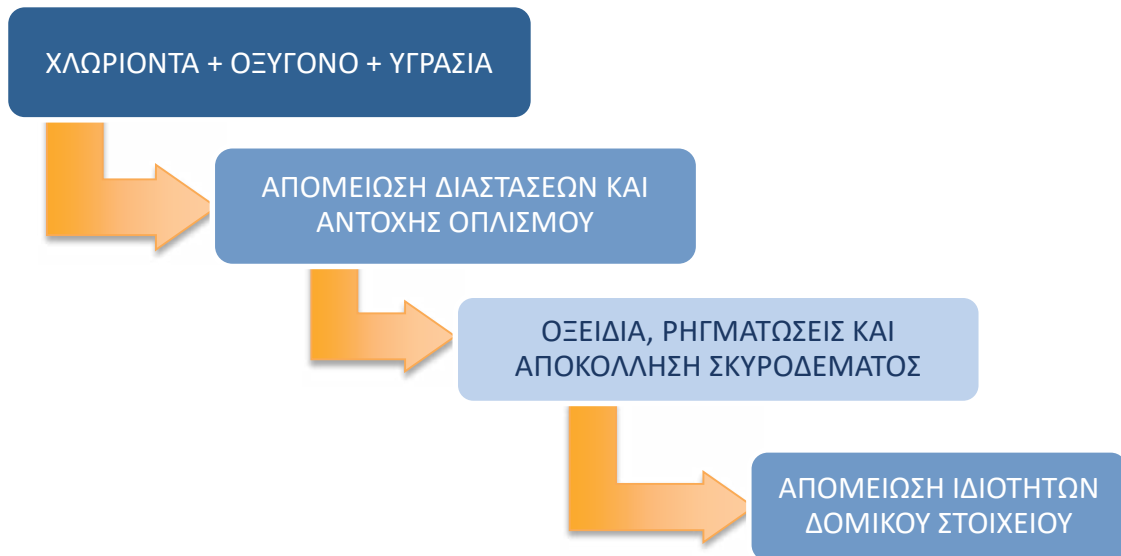

Διάχυση Χλωριόντων

Φαινόμενος συντελεστής διάχυσης χλωριόντων

ΣΚΥΡΟΔΕΜΑ	Χρόνος (μέρες)	Αρχική περιεκτικότητα Cl Cs (%)	Επιφανειακή περιεκτικότητα Cl Cs (%)	Φαινόμενος συντελεστής διάχυσης Cl (m^2/s)
C χωρίς PA	35	0,023	1,084	$7,20 \cdot 10^{-12}$
C1 με PA	35	0,022	1,304	$4,90 \cdot 10^{-12}$
C2 με PA	35	0,008	1,481	$4,66 \cdot 10^{-12}$

C και C1: CEM II/B-P

C2: CEM II/B-S

PA: PENETRON ADMIX®

ASTM C 1556

ΕΠΙΔΡΑΣΕΙΣ ΤΟΥ PENETRON ADMIX[®] ΚΑΤΑ ΤΗ ΔΙΑΡΚΕΙΑ ΖΩΗΣ ΤΟΥ ΣΚΥΡΟΔΕΜΑΤΟΣ

Προσδιορισμός της επέκτασης της ωφέλιμης διάρκειας ζωής του σκυροδέματος

Ο 2^{ος} Νόμος Διάχυσης του Fick

$$C(x, t) = C_s \left[1 - \operatorname{erf} \left(\frac{x}{2\sqrt{D_c t}} \right) \right] \quad D_c(t) = D_0 \left(\frac{t_0}{t} \right)^m$$

C(x,t) Chloride ion concentration at a distance x from the surface of the concrete by an exposure period t (material mass %)

C_s Chloride ion concentration on the surface of the concrete (material mass %)

x Coating thickness (m)

t Exposure time to chloride ion (years)

D_c Chloride diffusion coefficient (m² / s)

erf Error function

D_c(t) Chloride diffusion coefficient at time t (m² / s)


D₀ Chloride diffusion coefficient at time t₀ (m² / s)

t₀ Initial chloride diffusion time (years)

Ιδιότητα	C χωρίς PENETRON ADMIX [®]	C1 με PENETRON ADMIX [®]	C2 με PENETRON ADMIX [®]
Επικάλυψη οπλισμού (m)	0,06	0,06	0,06
Συγκέντρωση χλωριόντων: Επιφάνεια, C _s (% μάζας)	1,53	1,30	1,48
Φαινόμενος Συντελεστής Διάχυσης, D _a (m ² /s)	7,20E-12	4,90E-12	4,66E-12
Συντελεστής Διάχυσης, διορθωμένος με το συντελεστή χρόνου, D(t) (m ² /s)	3,22·10 ⁻¹³	1,40·10 ⁻¹³	1,33·10 ⁻¹³
Σφάλμα λειτουργίας, erf	0,967	0,962	0,966
Όριο συγκέντρωσης χλωριόντων σκυροδέματος, C(x,t) (%)	0,05	0,05	0,05
Όριο συγκέντρωσης χλωριόντων σκυροδέματος, (% grc)	0,32	0,32	0,32
Ωφέλιμος χρόνος ζωής κατασκευής, t (έτη)		94,8	95,3

ΕΠΙΔΡΑΣΕΙΣ ΤΟΥ PENETRON ADMIX® ΚΑΤΑ ΤΗ ΔΙΑΡΚΕΙΑ ΖΩΗΣ ΤΟΥ ΣΚΥΡΟΔΕΜΑΤΟΣ

Προσδιορισμός της επέκτασης της ωφέλιμης διάρκειας ζωής του σκυροδέματος

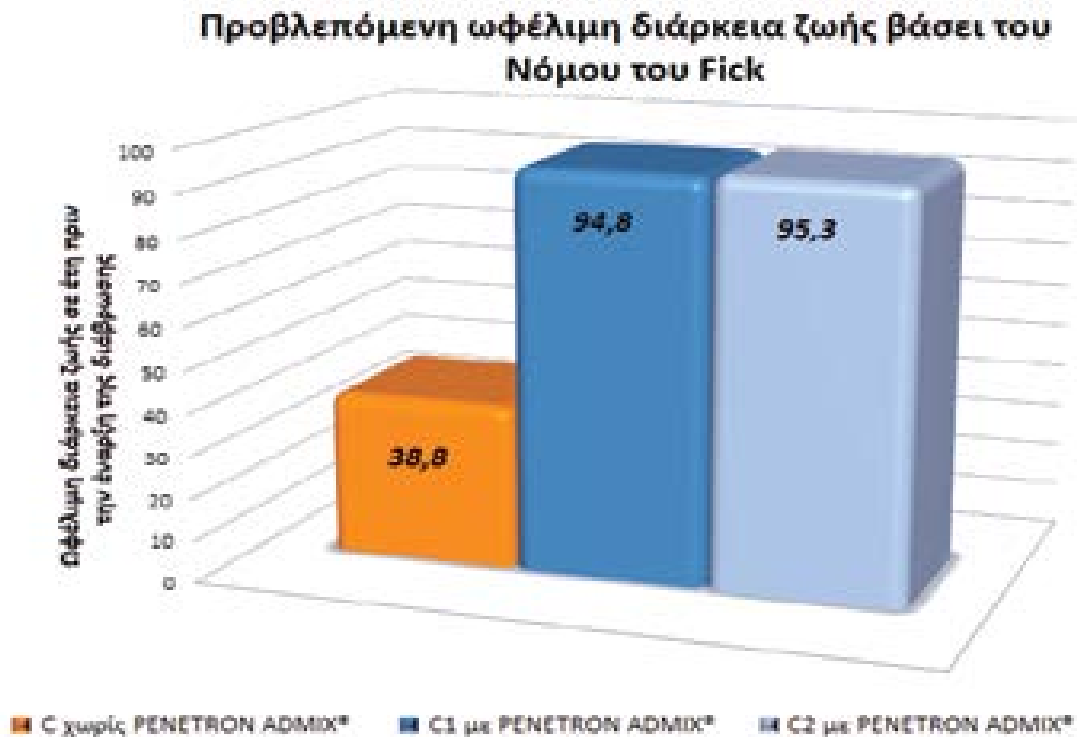

έως 60
ΧΡΟΝΙΑ
ή και
περισσότερο

ΕΠΙΔΡΑΣΕΙΣ ΤΟΥ PENETRON ADMIX® ΚΑΤΑ ΤΗ ΔΙΑΡΚΕΙΑ ΖΩΗΣ ΤΟΥ ΣΚΥΡΟΔΕΜΑΤΟΣ

Ανασκόπηση οφελών



Ιδιότητα προς δοκιμή	Οφέλη σκυροδέματος επεξεργασμένο με το PENETRON ADMIX® έναντι σκυροδέματος χωρίς PA	Επιπλέον οφέλη
Συστολή ξήρανσης (μεταβολή του μήκος σε διάρκεια 1 έτους mm/m)	<24%	Μείωση ρηγματώσεων λόγω συρρίκνωσης
Αλλαγή στην ανθεκτικότητα σε θειικά (ASTM C1012-12)	Καμία εσωτερική διαστολή	Απουσία ρηγματώσεων κατά την προσβολή σε θειικά
Συντελεστής διάχυσης χλωριόντων (m ² /s) (ASTM C1556-04)	<45%	Μείωση του συντελεστή διάχυσης χλωριδίων παρατείνει την ωφέλιμη ζωή της κατασκευής
Μεταβολή μήκους σε Κύκλους Ψύξης-Απόψυξης (%) (NCh 2185 Of 92)	<10,53% του δείγματος ελέγχου	Εξαλείφει την ανάγκη χρήσης αερακτικών προσμίκτων
Μείωση διαπερατότητας (DIN 1048)	>91%	Η ενεργοποίηση των κρυστάλλων μειώνει την διαπερατότητα
Εύρος ρωγμής με ικανότητα αυτο-επούλωσης	≤0,4mm	Αυτο-επούλωση νέων ρηγματώσεων
Αντοχή σε θλίψη (MPa)	>13%	Αυξάνει την αντοχή σε θλίψη
Επέκταση της ζωής λειτουργίας (σε έτη) (Νόμος του Fick)	έως και 60 έτη (σε σύγκριση με το δείγμα ελέγχου)	Εξαλείφει την ανάγκη χρήσης αναστολέων διάβρωσης

Έχει αποδειχθεί ότι το PENETRON ADMIX® αυξάνει σημαντικά την ανθεκτικότητα/ωφέλιμη διάρκεια ζωής του σκυροδέματος και ως εκ τούτου συνιστάται για ΟΛΕΣ τις συγκεκριμένες εφαρμογές που απαιτούν εκτεταμένη διάρκεια ζωής.

Έργα ανά τον Κόσμο




Kuningan City, Τζακάρτα, Ινδονησία



Sportshub, Σιγκαπούρη



Κατοικίες Capri, Φλόριντα, ΗΠΑ

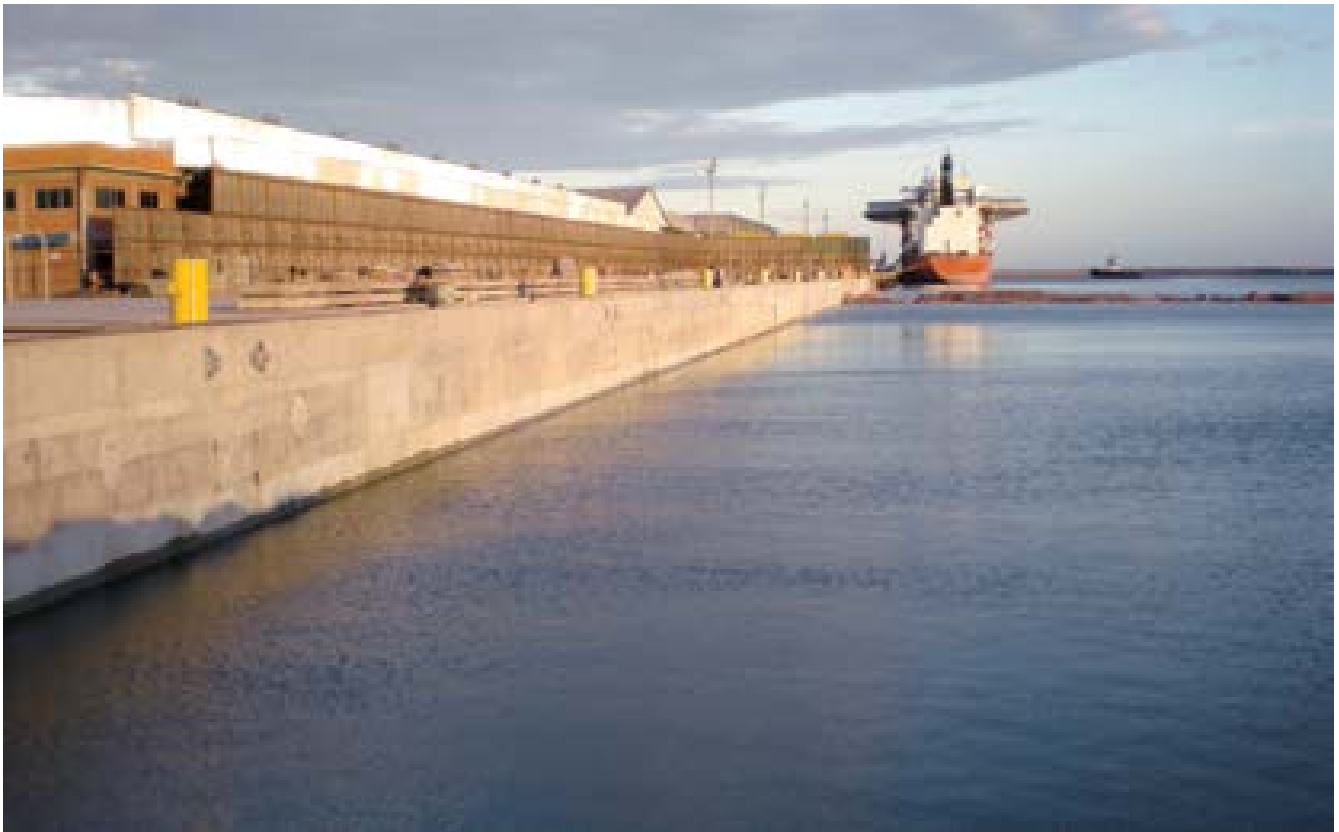

Λιμάνι Portocel Aracruz, Βραζιλία



Νοσοκομείο Ziraquirá, Κολομβία



Συνεδριακό Κέντρο Αράχωβας, Ελλάδα



Τερματικός Σταθμός 3 Αεροδρομίου Changi, Σιγκαπούρη



Διεθνές Αεροδρόμιο Chennai, Ινδία



Διεθνές Αεροδρόμιο Μυμбай, Ινδία



Διεθνές Αεροδρόμιο Guarulhos, Σάο Πάολο, Βραζιλία



City Park Βουδαπέστης, Ουγγαρία



Στάδιο Talkatora, Ινδία (Αγώνες Κοινοπολιτείας 2010)



Milan Sud, Μονάδα Επεξεργασίας Λυμάτων, Ιταλία



Στάδιο Green Point, Κέηπ Τάουν, Νότια Αφρική



Gardens by the Bay, Σιγκαπούρη



The Troika, Μαλαισία




Add 60 years to service-life of concrete in critical environments

Historically, the prime concern for concrete designers has been its resistance to mechanical stress, i.e. strength. In recent years, durability has emerged as equally important.

However, durability cannot be achieved with reducing the W/C ratio, high compressive strength, more cement, air-entraining admixtures or corrosion inhibitors alone.

To achieve concrete durability in critical environments, properties like low permeability, low shrinkage, self-healing and protection against chemical attack must be realized. **PENETRON ADMIX** incorporates the technology that provides such properties and recent testing has shown it can add up to 60 years or more to a variety of concretes, including CEM II /B-P, CEM II / B-S and CEM III/A, in critical environments before the onset of corrosion.

Projected service-life according to Fick Law

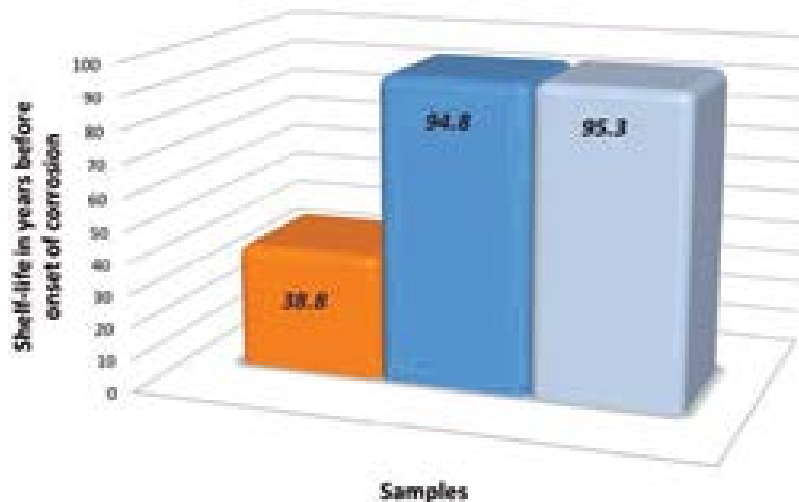

■ C without Penetron Admix ■ C1 with Penetron Admix ■ C2 with Penetron Admix

These results are in line with ACI report 212.R3-10, which concludes that crystalline admixtures are the best PRAH (permeability reducing admixtures for hydrostatic conditions) and increase durability of concrete.

Details of this durability testing are provided below.

Jozef Van Beeck
Director International Sales & Marketing

PENETRON ADMIX DURABILITY RESEARCH RESULTS

In order to establish the effect of **PENETRON ADMIX** on the durability of concrete, a complete research project was executed at leading independent laboratories over a 2-year period. The testing included compressive strength, drying shrinkage, permeability, sulphate resistance, chloride diffusion resistance, freeze-thaw cycle resistance, self-healing ability, microscopic examination of crystalline formation and most importantly – a resulting service-life estimation of concrete treated with PENETRON ADMIX.


The results of this testing regime are summarized in the following table.

Property tested	Benefits of concrete with Penetron Admix vs. concrete without PA	Additional benefits
Drying shrinkage (1 year length changes mm/m)	<24%	Less shrinkage cracking
Sulphate resistance changes (ASTM C1012-12)	No internal expansion	No cracking under sulphate attack
Chloride diffusion coefficient (m²/s) (ASTM C1556-04)	<45%	Low chloride diffusion coefficient prolongs service life of the structure
Freeze-Thaw Cycle length changes (%) (NCh 2185 Of 92)	<10.53% of control sample	Eliminates need for air entrainment admixtures
Reduction of permeability (DIN 1048)	>91%	Activation of crystals reduces permeability
Crack width self-healing capacity	≤0.4mm	Self-healing of new cracks
Compressive Strength (Mpa)	>13%	Increases compressive strength
Extension of service-life (in years) (Fick Law)	up to 60 years (compared to control sample)	Eliminates need for corrosion inhibitors

Each test result will be expanded upon in detail in these durability updates going forward – in this issue we will focus on the service-life estimation based on Chloride diffusion only.

SERVICE-LIFE ESTIMATION OF CONCRETE IN CRITICAL ENVIRONMENTS

The mechanism of concrete deterioration by chloride diffusion looks as follows.

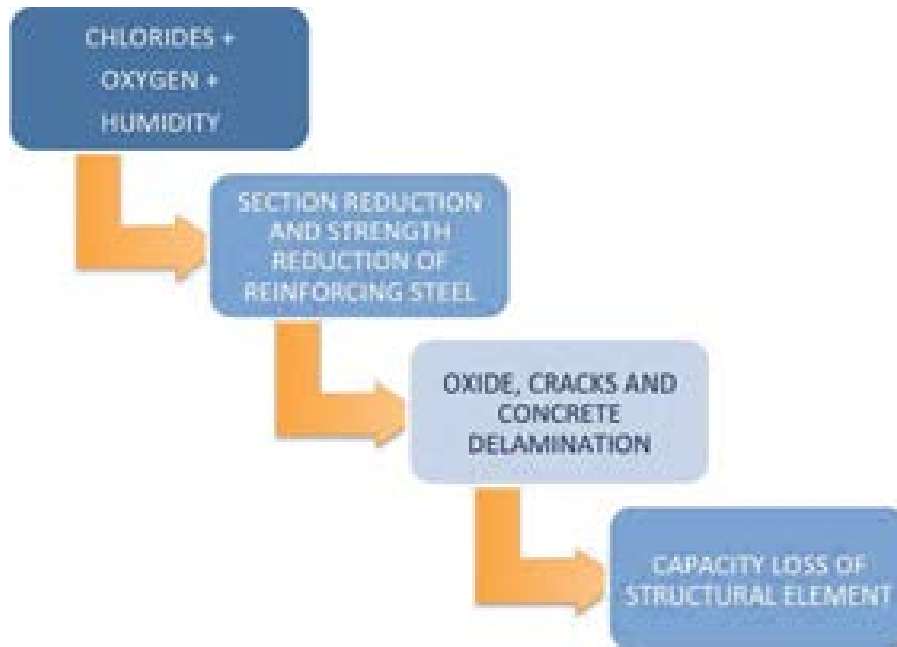

Chloride diffusion testing performed according to ASTM C1556 yielded the following results, with and without PENETRON ADMIX.

Table 2. Apparent chloride diffusion coefficient

CONCRETE	Time (Days)	Initial Content Cl Ci (%)	Superficial Content Cl Cs (%)	Apparent Diffusion Coefficient Cl(m ² /s)
C WITHOUT PA	35	0,023	1,084	7,20E-12
C1 WITH PA	35	0,022	1,304	4,90E-12
C2 WITH PA	35	0,008	1,481	4,66E-12

C and C1: CEM II/B-P

C 2: CEM II / B-S

PA : PENETRON ADMIX

Using the **2nd Fick law of diffusion**, we can then estimate the service-life of concrete based on the chloride diffusion coefficient and the cover of steel, obtaining the following results.

$$C(x,t) = C_i \left[1 - \operatorname{erf} \left(\frac{x}{2\sqrt{D_c t}} \right) \right] \quad D_c(t) = D_0 \left(\frac{t_2}{t} \right)^m$$

Property	C without Penetron Admix	C1 with Penetron Admix	C2 with Penetron Admix
Steel cover (m)	0.06	0.06	0.06
Chloride concentration: Surface, C_s (% mass)	1.53	1.30	1.48
Apparent diffusion coefficient, D_a (m^2/s)	7.20E-12	4.90E-12	4.66E-12
Diffusion coefficient corrected for age factor, $D(t)$ (m^2/s)	3.22E-13	1.40E-13	1.33E-13
Error function, erf	0.967	0.962	0.966
Chloride concentration limit in concrete, $C_{(x,t)}$ (%)	0.05	0.05	0.05
Chloride concentration limit in concrete, (% rpc)	0.32	0.32	0.32
Service life structure, t (years)	38.8	94.8	95.3


Note: testing was done under exposure conditions conforming to ASTM C1556

This testing shows that, in an environment with chloride concentrations 4.7 times higher than true marine environments, PENETRON ADMIX treated concrete can add up to 60 years and more to the service-life of a conventional concrete, before the onset of corrosion.

A second chloride migration test in accordance with Nordtest, done on an extremely durable concrete mix design CEM III/A, still yielded another 40 years of service-life extension with PENETRON ADMIX.

CASE STUDY : SINGAPORE SPORTS HUB / NEW SINGAPORE NATIONAL STADIUM

Location: Kallang, Singapore
Date: 2014
Architect: AECOM / Arup Sport / DP Architects
Contractor: Dragages Singapore Pte. Ltd.

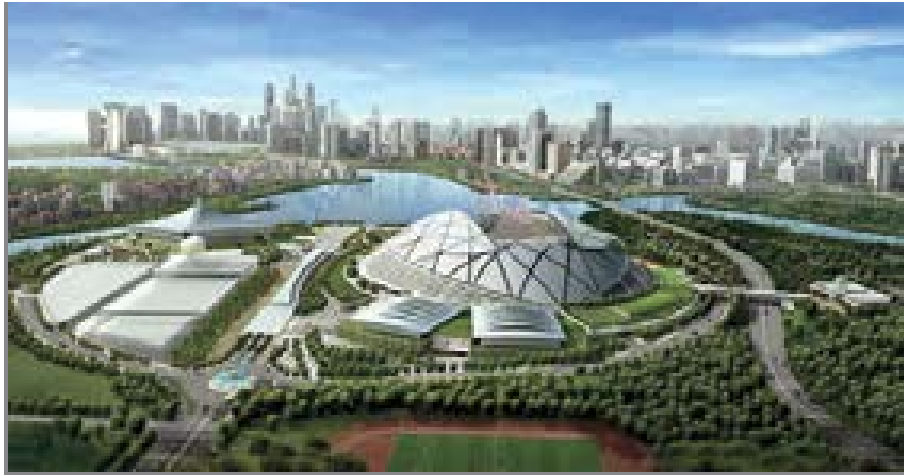

Singapore is now home to the world's largest dome structure

The Singapore Sports Hub, built on the original site of the National Stadium, has opened its doors on June 30, 2014 and is the country's new central sports destination.

Works on the site began in September 2010 after the demolition of the former Singapore National Stadium. The new facility includes a new 55'000 capacity National Stadium, a 3'000 capacity indoor Aquatic Centre with leisure facilities, a 3'000-capacity multi-purpose Indoor Arena, 41'000 square meters of commercial space and a Water Sports Centre on the shores of the Kallang Basin. This includes a Sports Promenade, the Singapore Sports Museum, the Sports Hub Library as well as the Kallang Wave Shopping Mall.



The Sports Hub's centerpiece is the new Singapore National Stadium. This landmark structure is currently the world's only multi-purpose arena with mechanized and automated retractable seating configurations on its lower tier. Within 48 hours the stadium can be reconfigured to host different events such as concerts, football and rugby matches, cricket and athletic events. The dome structure features a retractable roof, making the National Stadium an all-weather event facility.

Approved by the Singapore Environmental Council (SEC) with the Singapore Green Label, the PENETRON System was chosen to ensure the concrete durability on this iconic, green building development. PENETRON ADMIX was used on approximately 55'000 cubic meters of base slab and retaining walls. Penebar SW 55 waterstops were installed in over 18'500 meters of construction joints. In addition, 16'000 square meters of internal wet areas and exposed concrete including the RC roof were treated with Peneseal Pro.

The project is yet another milestone in PENETRON's long-standing track record of protecting Singapore's infrastructure.



WITNESS PENETRON'S CRACK HEALING ABILITY

[Click here to view the video](#)



Welcome to the 30th edition of the PENETRON Industry Newsletter.

In our [previous concrete durability update](#), we highlighted how PENETRON ADMIX increases the service life of concrete structures in critical environments by 60 years and more. This life-extension capacity was established by means of the treated concrete's chloride diffusion coefficient and the 2nd Fick law. ([read here](#))

In this issue, we will expand on another aspect of concrete durability -- its ability to resist sulfate attack. Extensive testing has shown that concrete treated with PENETRON ADMIX is virtually resistant to sulfate attack.

Further, we discuss how concrete durability should be tested. Too often, traditional testing methods (such as surface water absorption testing) are being used to test advanced hydrophilic protection systems, which leads to the wrong conclusions. Permeability testing is the only way to verify a true PRAH's (Permeability Reducing Admixture for Hydrostatic conditions) performance.

Last but not least, we invite you to have a look at some recent PENETRON projects in Norway, USA, Saudi Arabia and the UAE.

Jozef Van Beeck
Director International Sales & Marketing



GET THE PENETRON APP NOW! ON ANDROID AND iOS

INSIDE THIS ISSUE

PENETRON ADMIX durability research: Resistance to



**DOWNLOAD
THE PENETRON
BROCHURE**

sulfate attack

PRAN vs PRAH / absorption versus permeability

PENETRON WORLDWIDE

Aker Solutions, Stavanger, Norway

Kempinski Hotel Jeddah, Saudi Arabia


Abu Dhabi National Paper Mill (Expansion), Mussafah, UAE

Manhattan District Garage 1/2/5, New York, USA

FOLLOW US 

 SEND TO A FRIEND

 SUBSCRIBE

 HOW PENETRON WORKS

VIEW A 3 MINUTE VIDEO DEMONSTRATION

 PENETRON APP DOWNLOAD HERE

PENETRON ADMIX durability research: Resistance to sulfate attack

Sulfate attack typically occurs where water containing dissolved sulfate penetrates the concrete. The ensuing reaction causes the composition and microstructure of the concrete to change. These changes include extensive cracking and loss of bond between the cement paste and aggregate, which in turn cause an internal expansive force.

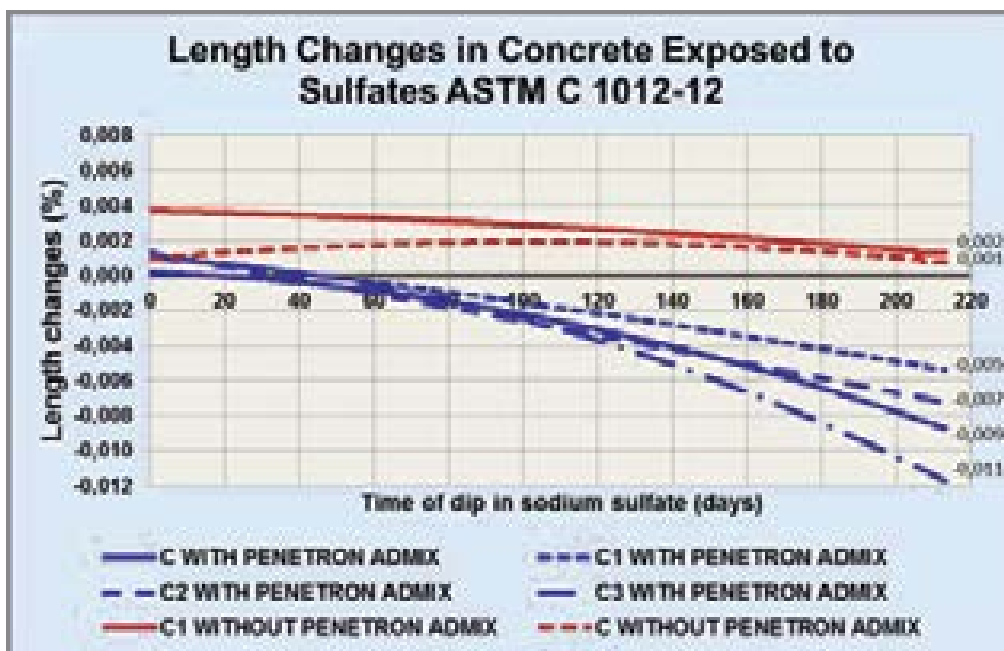


Figure 14. Changes in length of concrete exposed to sulfate, according to ASTM C1012.

Extensive testing has shown that concrete treated with PENETRON ADMIX, subjected to a solution of sodium sulfate, does not show any change in length by such expansion. Untreated concrete samples subjected to the same sodium sulfate solution showed significant change in length as well as disintegration of mass.

PRAN vs PRAH / absorption versus permeability

PRAN vs PRAH / absorption versus permeability

It is a common and risky misconception in many construction markets today, that capillary absorption tests are suitable to demonstrate the performance of permeability-reducing admixtures for hydrostatic pressure (PRAH).


Integral waterproofing admixtures are designed to reduce water ingress into concrete by reducing the permeability of concrete. Hence, the American concrete Institute (ACI) has classified a new category of concrete admixtures called "Permeability-Reducing Admixtures" (PRA), subdivided into "permeability-reducing admixtures for non-hydrostatic conditions" (PRAN) and "permeability-reducing admixtures for hydrostatic conditions" (PRAH).

The ACI 212-3R-10-N report suggests that only crystalline admixtures, like **PENETRON ADMIX**, qualify as true PRAH. Crystalline admixtures are hydrophilic materials that form insoluble crystalline structures, which seal pores, microcracks and capillaries, reducing concrete permeability even under high hydrostatic pressure.

Hydrophobic or water repellent chemicals such as pore blockers, fall under the category of PRAN. These materials are designed to repel water by blocking pores and capillaries with a water repellent substance. To demonstrate the water-repellent function, manufacturers of hydrophobic admixtures employ capillary absorption tests, such as ASTM C1585 and BS EN 1881-122. These tests measure water absorption after immersion of the sample in water. No pressure is applied, which is why no indication of the level of protection of hydrophobic admixtures exposed to hydrostatic conditions can be established. Due to the uneven coating of the hydrophobic lining and open capillary system, the protection against water under pressure is extremely limited (usually a few centimeters of water head). This limits their use to protection against rain or minimizing dampness.

Crystalline admixtures withstand high, hydrostatic pressure. To determine their performance, only permeability tests such as DIN 1048 pt. 5, BS EN 12390-8 or ASTM D5084 should be used. These tests apply water under pressure and, contrary to absorption tests, are able to give an indication of the performance under hydrostatic conditions. **Since a lot of the water applied during this test is taken up by the crystalline reaction to form crystals, a true performance indication can be achieved by repeating the test cycle over several weeks (see 4 week test images below).**

To read more on this subject, [click here](#).

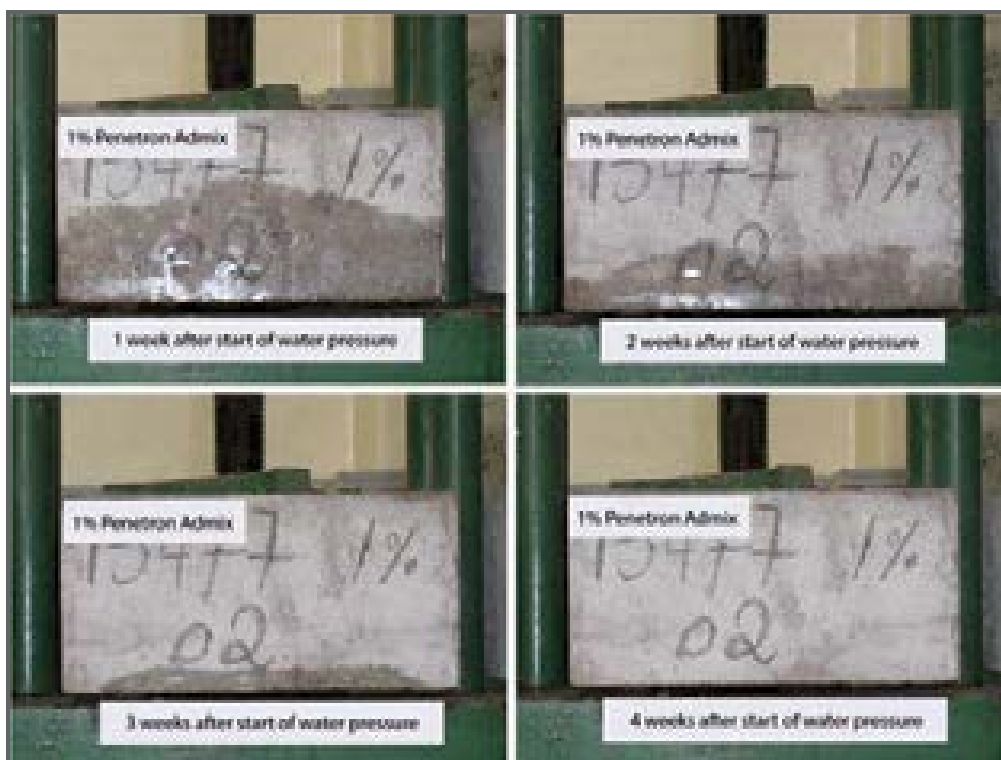

Aker Solutions, Stavanger, Norway

Aker Solutions, a global Norwegian company that provides oilfield products and services, recently inaugurated a new office facility in Stavanger. This new building is the global headquarters for the Operations division and home to 2,600 employees. PENETRON ADMIX was used for the extensive below-ground structures for protection from groundwater and seawater at the construction site.

Located adjacent to the North Sea, the Stavanger headquarters features eight above-ground office floors (43,000 m² / 484,400 square feet) and two below-ground floors for a basement with bicycle parking for 1,000 bicycles and a parking garage (65,000 m² / 700,000 square feet) with space for 500 cars.



The site was reclaimed ocean frontage directly on the coastline, exposing the site to the water table and chloride penetration from the seawater. About 11,000m³ of concrete were treated with PENETRON ADMIX, including the building's foundation and basement structures. PENETRON ADMIX was chosen to ensure comprehensive waterproofing and to reduce permeability for chloride ions in the concrete and optimize durability.

PENETRON ADMIX performed flawlessly and allowed construction to proceed without any delays, delivering to the client a completely protected and durable concrete foundation.



Kempinski Hotel Jeddah, Saudi Arabia

The Kempinski Hotel Jeddah is located on Jeddah Corniche providing magnificent views of the Red Sea. Designed to be the first green intelligent hotel in the Kingdom of Saudi Arabia, the 260-meter high tower will boast 321 units: 250 luxury guest rooms and suites, with the rest as serviced apartments spread over 70 floors.



The Kempinski Hotel Jeddah will be the finest address for leisure travelers in Jeddah. The hotel will include a full array of first class facilities including luxurious leisure suites, two restaurants offering a range of international cuisines, a 1000 sqm ballroom, a wellness center and spa, and swimming pool. Corporate guests can take advantage of corporate and meetings facilities, including fully equipped modern meeting rooms, VIP rooms and business suites.

Due to its close proximity to the Red Sea it was imperative to provide a 100% solution when it came to the protection and waterproofing of the raft foundation, retaining walls, and other water-retaining structures such as the water tanks and swimming pools. In order to ensure total concrete protection on this prestigious project. PENETRON ADMIX was added to approximately 30,000m³ of concrete supplied by Saudi Readymix.



Abu Dhabi National Paper Mill (Expansion), Mussafah, UAE

Abu Dhabi National Paper Mill (ADNPM) is one of the largest and most technically advanced producers of jumbo tissue paper rolls in the Middle East. ADNPM follows the highest quality, environmental and health & safety standards including ISO 9001, 14001 and OHSAS 18001. The facility includes manufacturing and storage areas, an effluent treatment plant as well as administration offices and parking. It has a total area of 60,000 square meters and produces over 65,000 tons of tissue paper per year. The paper, produced from the highest-grade virgin pulp, is used to make table napkins, kitchen and hand towels, and facial and toilet tissues.



In 2014 the expansion of the facility saw a new production line (PM3) added to ADNPM.

The building features a 6m deep basement, which is located one meter below the sea water level.

PENETRON ADMIX was tested and chosen as the preferred concrete protection solution and added to the concrete mix of the slab and retaining walls of the new production line facility. All construction joints were sealed using PENEBAR SW 45 waterstop.

PENETRON, PENECRETE MORTAR AND PENEPLUG were employed to treat leaks in the piles.



Manhattan District Garage 1/2/5, New York, USA

Previously located at Pier 52 on the Hudson River, the garage facility was moved to the corner of Spring & West Streets to make waterfront land available for the recently established Hudson River Park. The new Manhattan District 1/2/5 Garage serves the Department of Sanitation New York (DSNY) as a base of operations for three separate District Garages, as well as the UPS Staging Lot operations for Lower Manhattan.

The Manhattan District 1/2/5 Garage accommodates over 150 sanitation vehicles, a separate vehicle wash, personnel facilities for each district, and centralized fueling and repair facilities. A benchmark project for NYC's Active Design program, the garage features a green roof to protect the building and enhance storm water retention and thermal performance. Designed by Dattner Architects in association with WXY Architecture + Urban Design, the project is set to achieve a LEED Gold certification.

The garage is a five-level structure with a total floor area of about 427,250 square feet (39,700m²). The parking levels, with approximately 266 parking spaces, accommodate vehicle parking and storage, offices, and locker facilities. The building was constructed on a concrete slab with pilings (no cellar) using **PENETRON ADMIX SB**. In addition, there are two 15,000 L (4,000 gallon) underground tanks, also treated with PENETRON ADMIX, for storage of liquid calcium chloride, which is applied with rock salt to melt snow and ice. Overall, about 12,230m³ (16,000 cubic yards) of concrete were treated with PENETRON ADMIX for all concrete structures.



WITNESS PENETRON'S CRACK HEALING ABILITY

[Click here to view the video](#)



BEFORE



AFTER



ACI Education Bulletin E4-12

Chemical Admixtures for Concrete

Developed by ACI Committee E-701



American Concrete Institute®



First Printing
January 2013

American Concrete Institute®
Advancing concrete knowledge

Chemical Admixtures for Concrete

Copyright by the American Concrete Institute, Farmington Hills, MI. All rights reserved. This material may not be reproduced or copied, in whole or part, in any printed, mechanical, electronic, film, or other distribution and storage media, without the written consent of ACI.

The technical committees responsible for ACI committee reports and standards strive to avoid ambiguities, omissions, and errors in these documents. In spite of these efforts, the users of ACI documents occasionally find information or requirements that may be subject to more than one interpretation or may be incomplete or incorrect. Users who have suggestions for the improvement of ACI documents are requested to contact ACI via the errata website at www.concrete.org/committees/errata.asp. Proper use of this document includes periodically checking for errata for the most up-to-date revisions.

ACI committee documents are intended for the use of individuals who are competent to evaluate the significance and limitations of its content and recommendations and who will accept responsibility for the application of the material it contains. Individuals who use this publication in any way assume all risk and accept total responsibility for the application and use of this information.

All information in this publication is provided "as is" without warranty of any kind, either express or implied, including but not limited to, the implied warranties of merchantability, fitness for a particular purpose or non-infringement.

ACI and its members disclaim liability for damages of any kind, including any special, indirect, incidental, or consequential damages, including without limitation, lost revenues or lost profits, which may result from the use of this publication.

It is the responsibility of the user of this document to establish health and safety practices appropriate to the specific circumstances involved with its use. ACI does not make any representations with regard to health and safety issues and the use of this document. The user must determine the applicability of all regulatory limitations before applying the document and must comply with all applicable laws and regulations, including but not limited to, United States Occupational Safety and Health Administration (OSHA) health and safety standards.

Participation by governmental representatives in the work of the American Concrete Institute and in the development of Institute standards does not constitute governmental endorsement of ACI or the standards that it develops.

Order information: ACI documents are available in print, by download, on CD-ROM, through electronic subscription, or reprint and may be obtained by contacting ACI.

Most ACI standards and committee reports are gathered together in the annually revised ACI Manual of Concrete Practice (MCP).

American Concrete Institute
38800 Country Club Drive
Farmington Hills, MI 48331
U.S.A.
Phone: 248-848-3700
Fax: 248-848-3701

www.concrete.org

CHEMICAL ADMIXTURES FOR CONCRETE

Prepared under the direction and supervision of ACI Committee E-701 Materials
for Concrete Construction

Thomas M. Greene
Chair

Corina-Maria Aldea
Richard P. Bohan
David A. Burg
Darrell F. Elliot

Darmawan Ludirdja
Mark R. Lukkarila
Clifford N. MacDonald
Charles K. Nmai

David M. Suchorski
Lawrence L. Sutter
Joseph E. Thomas
Paul J. Tikalsky

Kari L. Yuers*
Robert C. Zellers
*Chair of document subcommittee.

The committee would like to thank Jeff Bowman, Kryton International, for his assistance in preparing this document.

This document discusses commonly used chemical admixtures for concrete and describes the basic use of these admixtures. It is targeted at those in the concrete industry not involved in determining the specific mixture proportions of concrete or in measuring the properties of the concrete. Students, craftsmen, inspectors, and contractors may find this a valuable introduction to a complex topic. The document is not intended to be a state-of-the-art report, user's guide, or a technical discussion of past and present research findings. More detailed information is available in ACI Committee Report 212.3R, "Chemical Admixtures for Concrete" and 212.4R, "Guide for the Use of High-Range Water-Reducing Admixtures (Superplasticizers) in Concrete."

CONTENTS

Chapter 1—Introduction

- 1.1—History
- 1.2—Definitions and glossary

Chapter 2—Overview

- 2.1—Function
- 2.2—Effectiveness and compatibility
- 2.2—Standards

Chapter 3—Air-entraining admixtures

- 3.1—History
- 3.2—Mechanism
- 3.3—Use of air-entraining admixtures
- 3.4—Properties of entrained air
- 3.5—Handling and testing of air-entrained concrete

Chapter 4—Water-reducing and set-controlling admixtures

- 4.1—Types and composition
- 4.2—Type A, water-reducing admixtures
- 4.3—Type B, retarding, and Type D, water-reducing and retarding admixtures
- 4.4—Type C, accelerating, and Type E, water-reducing and accelerating admixtures
- 4.5—High-range, water-reducing admixtures
- 4.6—Mid-range, water-reducing admixtures
- 4.7—Admixtures for self-consolidating concrete
- 4.8—Admixtures for slump and workability retention

Chapter 5—Specialty admixtures

- 5.1—Corrosion-inhibiting admixtures
- 5.2—Shrinkage-reducing admixtures
- 5.3—Admixtures for controlling alkali-silica reactivity
- 5.4—Admixtures for underwater concrete
- 5.5—Admixtures for cold weather
- 5.6—Permeability reducing admixtures

Chapter 6—Admixture dispensers

- 6.1—Industry requirements and dispensing methods
- 6.2—Accuracy requirements
- 6.3—Application considerations and compatibility
- 6.4—Field and truck mounted dispensers
- 6.5—Dispenser maintenance

Chapter 7—Conclusion

Chapter 8—References

- 8.1—Cited references
- 8.2—List of relevant ASTM standards

The Institute is not responsible for the statements or opinions expressed in its publications. Institute publications are not able to, nor intended to, supplant individual training, responsibility, or judgement of the user, or the supplier, of the information presented.

ACI Education Bulletin E4-12. Supersedes E4-03. Adopted in 2012 and published in 2013.

Copyright © 2013, American Concrete Institute.

All rights reserved including rights of reproduction and use in any form or by any means, including the making of copies by any photo process, or by electronic or mechanical device, printed, written, or oral, or recording for sound or visual reproduction or for use in any knowledge or retrieval system or device, unless permission in writing is obtained from the copyright proprietors.

CHAPTER 1—INTRODUCTION

1.1—History

Admixtures have long been recognized as important components of concrete used to improve its performance. The original use of admixtures in cementitious mixtures is not well documented. It is believed that the introduction of some of these materials may have been part of rituals or other ceremonies. It is known that cement mixed with organic matter was applied as a surface coat for water resistance or tinting purposes. Materials used in early concrete and masonry included milk and lard by the Romans; eggs during the middle ages in Europe; polished glutinous rice paste, lacquer, tung oil, blackstrap molasses, and extracts from elm soaked in water and boiled bananas by the Chinese; and in Mesoamerica and Peru, cactus juice and latex from rubber plants. The purpose of these materials is widely unknown. It is known that the Mayans used bark extracts and other substances as set retarders to keep stucco workable for a long period of time. More recently chemical admixtures have been used to help concrete producers meet sustainability requirements that are necessary for modern construction. For concrete these requirements can be related to extended life cycles, use of recycled materials, stormwater management, and reduced energy usage. Chemical admixtures are used to facilitate the increased use of supplementary cementitious materials, lower permeability, and improve the long term durability of concrete.

1.2—Definitions & Glossary

Concrete is composed principally of aggregates, hydraulic cement, and water, and may contain supplementary cementitious materials (SCM) and chemical admixtures. It will contain some amount of entrapped air and may also contain purposely entrained air obtained by use of a chemical admixture or air-entraining cement. Chemical admixtures are usually added to concrete as a specified volume in relation to the mass of portland cement or total cementitious material.

Admixtures interact with the hydrating cementitious system by physical and chemical actions, modifying one or more of the properties of concrete in the fresh or hardened states. According to ACI 212.3R-10, "Report on Chemical Admixtures for Concrete," an admixture or combination of admixtures may be the only feasible way to achieve the desired performance from a concrete mixture in some cases. There are many kinds of chemical admixtures that can function in a variety of ways to modify the chemical and physical properties of concrete. This bulletin provides information on the types of chemical admixtures and how they affect the properties of concrete, mortar, and grout. Definitions of certain types of admixtures and other selected terms can be found below and are taken from ACI Concrete Terminology.¹

Admixture—A material other than water, aggregates, cementitious materials, and fiber reinforcement, used as an ingredient of a cementitious mixture to modify its freshly mixed, setting, or hardened properties and that is added to the batch before or during its mixing. (The admixtures

referred to in this definition are also known as Chemical Admixtures.)

Admixture, accelerating—An admixture that causes an increase in the rate of hydration of the hydraulic cement, and thus, shortens the time of setting, increases the rate of strength development, or both.

Admixture, air-entraining—An admixture that causes the development of a system of microscopic air bubbles in concrete, mortar, or cement paste during mixing, usually to increase its workability and resistance to freezing and thawing.

Admixture, permeability-reducing—An admixture used to reduce the ingress of water and water borne chemicals into concrete. Admixtures may be further sub-divided into permeability-reducing admixtures for non-hydrostatic conditions (PRAN) or hydrostatic conditions (PRAH).

Admixture, retarding—An admixture that causes a decrease in the rate of hydration of the hydraulic cement and lengthens the time of setting.

Admixture, water-reducing—An admixture that either increases slump of a fresh cementitious mixture without increasing water content or maintains slump with a reduced amount of water, the effect being due to factors other than air entrainment.

Admixture, water-reducing high-range—A water-reducing admixture capable of producing great water reduction, great flowability, or both, without causing undue set retardation or air entrainment in cementitious paste.

Aggregate, reactive—Aggregate containing substances capable of reacting chemically with the products of solution or hydration of the portland cement in concrete or mortar under ordinary conditions of exposure, resulting in some cases in harmful expansion, cracking, or staining.

Air, entrained—Microscopic air bubbles intentionally incorporated in a cementitious paste during mixing, usually by use of a surface-active agent; typically between 0.0004 and 0.04 in. (10 and 1000 μm) in diameter and spherical or nearly so.

Air, entrapped—Air voids in concrete that are not purposely entrained and that are larger, mainly irregular in shape, and less useful than those of entrained air; and 1 mm or larger in size.

Air content—The volume of air voids in cement paste, mortar, or concrete, exclusive of pore space in aggregate particles, usually expressed as a percentage of total volume of the paste, mortar, or concrete.

Alkali—Salts of alkali metals, principally sodium and potassium; specifically sodium and potassium occurring in constituents of concrete and mortar, usually expressed in chemical analysis as the oxides Na_2O and K_2O .

Alkali-aggregate reaction—Chemical reaction in either mortar or concrete between alkalis (sodium and potassium) from portland cement or other sources and certain constituents of some aggregates; under certain conditions, deleterious expansion of concrete or mortar may result.

Alkali-carbonate reaction—The reaction between the alkalis (sodium and potassium) in portland cement and certain carbonate rocks, particularly calcitic dolomite

and dolomitic limestones, present in some aggregates; the products of the reaction may cause abnormal expansion and cracking of concrete in service.

Alkali-silica reaction—A generally deleterious dissolution and swelling of siliceous aggregates in the presence of pore solutions comprised of alkali hydroxides; the reaction products may cause abnormal expansion and cracking of concrete.

Calcium chloride—A crystalline solid, CaCl_2 ; in various technical grades, used as a drying agent, as an accelerator for fresh concrete, a deicing chemical, and for other purposes.

Cement, portland—A hydraulic cement produced by pulverizing clinker formed by heating a mixture, usually of limestone and clay, to 1400 to 1600°C (2550 to 2900°F). Calcium sulfate is usually ground with the clinker to control set.

Cementitious—Having cementing properties.

Sulfate attack—Either a chemical or physical reaction or both between sulfates usually in soil or groundwater and concrete or mortar; the chemical reaction is primarily with calcium aluminate hydrates in the cement-paste matrix, often causing deterioration.

Sulfate resistance—Ability of concrete or mortar to withstand sulfate attack.

CHAPTER 2—OVERVIEW

2.1—Function

Chemical admixtures discussed in this document are available in liquid and powder form. Liquid admixtures are dispensed through mechanical dispensers as the concrete is batched, but can be introduced to the concrete by other means, such as hand dosing or truck mounted dispensers. Powders are usually introduced in pre-packaged units that contain a prescribed amount. Most times the units consist of bags that can be opened and the contents added while mixing, or bags that are made to disintegrate and disperse their contents while mixing. Generally, admixtures in powdered form are introduced to the concrete after batching. A discussion of dispensing equipment for liquid admixtures is given in Chapter 6. The dosages used vary widely depending on several factors including, type of admixture, performance desired, environmental conditions, and many others. The uses of admixtures are outlined by the following functions that they perform:

- Increase workability without increasing water content or decrease the water content at the same workability;
- Retard or accelerate initial time of setting;
- Reduce or prevent shrinkage or create slight expansion;
- Modify the rate or capacity for bleeding;
- Reduce segregation;
- Improve pumpability;
- Reduce rate of slump loss;
- Retard or reduce heat evolution during early hardening;
- Accelerate the rate of strength development at early ages;
- Increase strength (compressive, tensile, or flexural);

- Increase durability or resistance to severe conditions of exposure, including application of deicing salts and other chemicals;
- Decrease permeability of concrete;
- Control expansion caused by the reaction of alkalis with reactive aggregate constituents;
- Increase bond of concrete to steel reinforcement;
- Increase bond between existing and new concrete;
- Improve impact and abrasion resistance;
- Inhibit corrosion of embedded metal;
- Produce colored concrete or mortar; and
- Aid in achieving sustainability requirements.

2.2—Effectiveness and Compatibility

The effectiveness of any admixture will vary depending on its concentration in the concrete and the effect of the various other constituents of the concrete mixture. Each class of admixture is defined by its primary function. It may have one or more secondary functions, however, and its use may affect, positively or negatively, concrete properties other than those desired. Therefore, adequate testing should be performed to determine the effects of an admixture on the plastic properties of concrete such as slump, rate of slump loss (that is the relationship between slump and time), air content, and setting time. In addition, testing should be performed to determine the effect of the admixture on the hardened properties of concrete that may be of interest, for example, strength development, drying shrinkage, modulus of elasticity, or permeability. The final decision as to the use of any admixture and the brand, class, or type, depends on its ability to meet or enhance specific concrete performance needs.

Many improvements can be achieved by proper selection and application of specific admixtures. The selection process should focus on the functional qualities required by structural demands, architectural requirements, and contractor needs.

Whatever the approach, be it a single water-reducing admixture or a combination approach, the use of admixtures can be beneficial. Admixtures provide additional means of controlling the quality of concrete by modifying some of its properties, however, they cannot correct for poor-quality materials, improper proportioning of the concrete, and inappropriate placement procedures.

It is quite common for a concrete mixture to contain more than one admixture. In the simplest cases, such as paving or residential applications, a concrete mixture may be dosed with only a water-reducing admixture and an air-entraining admixture. High-performance concrete mixtures may be dosed with as many as five admixtures, depending on the specific application. Therefore, it is imperative that the admixtures that are used in a given concrete mixture are compatible to prevent undesired effects such as rapid slump loss, air-entrainment difficulties, severe set retardation, or improper strength development.

A typical rule of thumb is for all admixtures to be added separately to a concrete mixture and not pre-blended before introduction into the mixture. In addition, admixture manufacturers typically provide information on potential

incompatibility with other admixture chemistries on product data sheets. However, it should be noted that incompatibility issues in concrete mixtures are typically due to undesired chemical interactions, physical interactions, or both between chemical admixtures and other mixture ingredients, in particular, the cementitious materials system. Sulfate imbalance in the system is typically a contributing factor in such cases. In addition, certain types of clay that may be present on aggregate surfaces can also result in incompatibility issues. Therefore, pre-project testing should be performed using materials proposed for use on a project to identify potential incompatibility issues prior to the start of a project. This testing requires knowledge of the rate of slump loss and the setting time under relatively hot and cold conditions (in addition to laboratory conditions). Concrete producers have used a number of means to determine the potential for incompatibility including calorimetry, other types of thermal measurements, laboratory concrete trials, and concrete plant trials. Test placements on-site are recommended to verify proper workability, finishability, and setting time of the proposed mixture.

2.3—References and Standards

- Guide to Durable Concrete ACI 201.2R
- Chemical Admixtures for Concrete ACI 212.3R
- Building Code Requirements for Structural Concrete ACI 318/318M
- Superplasticizers in Ready Mixed Concrete NRMCA No. 158
- Air-Entraining Admixtures ASTM C260
- Standard Specification for Air-Entraining Admixtures for Concrete AASHTO M 154
- Standard Specification for Air-Entraining Admixtures for Concrete CRD-C 13
- Chemical Admixtures ASTM C494/C494M
- Standard Specification for Chemical Admixtures for Concrete AASHTO M 194
- Standard Specification for Water Permeability of Concrete CRD-C 48
- Standard Specification for Chemical Admixtures for Concrete CRD-C 87
- Calcium Chloride ASTM D98
- Standard Specification for Calcium Chloride AASHTO M 144
- Foaming Agents ASTM C869/C869M
- Admixtures for Shotcrete ASTM C1141/C1141M
- Admixtures for Use in Producing Flowing Concrete ASTM C1017/C1017M
- Grout Fluidifier For Preplaced Aggregate Concrete ASTM C937
- Pigments for Integrally Colored Concrete ASTM C979/C979M
- Testing Hardened Concrete – Depth of Penetration of Water Under Pressure BS EN 12390-8
- Testing Concrete – Method for Determination of Water Absorption BS EN 1881 – Part 122
- Testing Hardened Concrete DIN 1048

*ASTM ASTM International

AASHTO American Association of State Highway and Transportation Officials

CRD Army Corps of Engineers, Chief of Research and Development

BS EN – European Standards

DIN – German Standards

CHAPTER 3—AIR-ENTRAINING ADMIXTURES

3.1—History

One of the most significant innovations in concrete technology was made during the 1930s. It was noted that certain concrete pavements were more able to withstand the detrimental effects of freezing and thawing cycles than others. These cycles, and the damage caused, were a major inhibitor to durability of concrete pavements and other exterior applications. Investigation showed that the more durable pavements were slightly less dense, and that the cement used had been obtained from mills using beef tallow as a grinding aid in the manufacturing of cement. The beef tallow acted as an air-entraining agent, which improved the durability of the pavements. Later, after rigorous investigation, air-entrained concrete was specified in climates where freezing-and-thawing resistance was needed.

Air-entraining admixtures (AEA) are primarily used to stabilize tiny air bubbles in concrete that protect against damage from repeated freezing-and-thawing cycles. Until the mid-1990s, the most commonly used air-entraining admixture for concrete was a neutralized wood resin. Newer formulations may instead be formulated from synthetic detergents such as the salts of organic acids and sulfonated hydrocarbons. These modern formulations offer enhanced performance such as improved stability compared to early formulations. Today, most State Department of Transportation (DOT) specifications have limits that require the use of an air-entraining admixture in pavements.

3.2—Mechanism

The space occupied by the mixing water in fresh concrete rarely becomes completely filled with cementitious hydration products after the concrete has hardened. The remaining spaces are capillary pores. Under saturated conditions, these cavities are filled with water. If this water freezes, the resulting expansion of water to ice (approximately 9%) creates internal pressure in a confined space. This stress exceeds the tensile strength of concrete. The result in non air-entrained concrete is cracking, scaling, and spalling.

Entrained air voids make the capillaries discontinuous. As a result of the mixing action, air-entraining admixtures stabilize air bubbles in the cement paste that become a component of the hardened concrete. The resultant air-void system consists of uniformly dispersed spherical voids, usually between 10 and 1000 μm (0.4 to 40 mil) in diameter. Because the air voids are generally larger than the capillaries, they form tiny reservoirs that act as safety valves during ice expansion, accommodating the increased volume and preventing the build-up of internal pressure. Air entrainment in concrete is expressed as a percent of the overall concrete volume.

Entrained air should not be confused with entrapped air. Entrapped air is due to normal mixing and results in large, non-uniform air bubbles that do not have the correct size and spacing required to prevent damage in concrete caused by freezing water. Proper air entrainment, or air void structures require the use of an admixture, either added to the plastic concrete or blended with the cement during manufacturing.

3.3—Use of air-entraining admixtures

Air-entraining admixtures should be required to conform to ASTM C260, “Standard Specification for Air-Entraining Admixtures for Concrete.” Dosage rates of air-entraining admixtures generally range from 15 to 130 mL per 100 kg (1/4 to 2 fl oz per 100 lb) of cementitious material. Higher dosages are sometimes required depending on the materials and mixture proportions. For example, concrete containing fly ash or other pozzolans often requires higher doses of air-entraining admixture to achieve the same air content compared to a similar concrete using only portland cement. Trial mixtures should be performed to ensure compatibility between air-entraining admixtures and other concrete components, including other chemical admixtures. Table 1 summarizes some of the factors that influence the entrained air content of fresh concrete.

3.4—Properties of Entrained Air

Entrained air must be present in the proper amount, and have the proper size and spacing factor to provide protection

from freezing and thawing. The term “spacing factor” represents the maximum distance that water would have to move before reaching an air void reservoir. For adequate protection in a water saturated freezing and thawing environment, the spacing factor should not be greater than 0.2 mm (0.008 in.).

Another factor that must be considered is the size of the air voids. For a given air content, the air voids cannot be too large if the proper spacing factor is to be achieved without using an unacceptable amount of air. The term “specific surface” is used to indicate the average size of the air voids. It represents the surface area of the air voids in concrete per unit volume of air. For adequate resistance to repeated freezing and thawing in a water-saturated environment, the specific surface should be greater than 24 mm²/mm³ (600 in.²/in.³).

The total volume of entrained air recommended by ACI Committee 201 for normal-strength concrete based on exposure conditions and aggregate size is listed in Table 2. Specified air contents, such as those listed in Table 2, are required to meet the spacing factor and specific surface requirements described above. Methods to analyze the air void system in hardened concrete are described in ASTM C457, “Standard Test Method for Microscopical Determination of Parameters of the Air-Void System in Hardened Concrete.”

Table 1 Factors affecting the air content of concrete at a given dosage of admixture*

Factor	Effect on air content
Cement	An increase in the fineness of cement will decrease the air content. As the alkali content of the cement increases, the air content may increase. An increase in the amount of cementitious materials can decrease the air content.
Fine aggregate	An increase in the fine fraction passing the 150 µm (No. 100) sieve will decrease the amount of entrained air. An increase in the middle fractions passing the 1.18 mm (No. 16) sieve, but retained on the 600 µm (No. 30) sieve and 300 µm (No. 50) sieve, will increase the air content. Certain clays may make entraining air difficult.
Coarse aggregate	Dust on the coarse aggregate will decrease the air content. Crushed stone concrete may result in lower air than a gravel concrete.
Water	Small quantities of household or industrial detergents contaminating the water may affect the amount of entrained air. If hard water is used for batching, the air content may be reduced.
Pozzolans and slag cement	Fly ash, silica fume, natural pozzolans, and slag cement can affect the dosage rate of air-entraining admixtures.
Admixtures	Chemical admixtures generally affect the dosage rate of air-entraining admixtures.
Slump	For less than a 75 mm (3 in.) slump, additional admixture may be needed. Increase in slump to about 150 mm (6 in.) will increase the air content. At slumps above 150 mm (6 in.), air may become less stable and the air content may decrease.
Temperature	An increase in concrete temperature will decrease the air content. Increase in temperature from 21 to 38 °C (70 to 100 °F) may reduce air contents by 25%. Reductions from 21 to 4 °C (70 to 40 °F) may increase air contents by as much as 40%. Dosages of air-entraining admixtures must be adjusted when changes in concrete temperatures take place.
Concrete mixer	The amount of air entrained by any given mixer (stationary, paving, or transit) will decrease as the blades become worn or become coated with hardened concrete buildup. Air contents often increase during the first 70 revolutions of mixing then will hold for a short duration before decreasing. Air content will increase if the mixer is loaded to less than capacity and will decrease if the mixer is overloaded. In very small loads in a drum mixer, however, air becomes more difficult to entrain.

* Information from Portland Cement Association document Manual on Control of Air Content in Concrete by Whiting and Nagi.

Table 2—Total Air Content for Concrete Exposed to Cycles of Freezing and Thawing*

Nominal maximum aggregate size, in.†	Air content, %	
	Exposure Class F1	Exposure Classes F2 and F3
3/8	6	7.5
1/2	5.5	7
3/4	5	6
1	4.5	6
1-1/2	4.5	5.5
2‡	4	5
3‡	3.5	4.5

* Information from Table 4.4.1 of ACI 318-11, "Building Code Requirements for Structural Concrete (ACI 318-11) and Commentary."

† See ASTM C33 for tolerance on oversize for various nominal maximum size designations.

‡ Air contents apply to total mixture. When testing concretes, however, aggregate particles larger than 1-1/2 in. are removed by sieving and air content is measured on the sieved fraction (tolerance on air content as delivered applies to this value). Air content of total mixture is computed from value measured on the sieved fraction passing the 1-1/2 in. sieve in accordance with ASTM C231.

In addition to resistance to freezing and thawing, air entrainment can have other effects on concrete, some positive and some negative. Air entrainment can increase workability and improve pumpability, especially for mixtures with low or moderate cementitious contents. Air-entrained concrete will also show reduced bleeding and segregation, however the reduced bleeding rate could lead to surface crusting and plastic cracking for flatwork placed in warm, windy conditions with low humidity. The compressive strength will be significantly affected by the air content, and typically an increase of 1% in air content will decrease compressive strength by about 5% for concrete mixtures with a compressive strength in the range of 21 to 35 MPa (3000 to 5000 psi). Adding air entrainment can also improve the finish of the surface of slabs and reduce the occurrence of voids and sand streaking on wall surfaces. Air entrainment, however, is *not* recommended for interior steel troweled floors, where air contents in excess of 3% can lead to premature finishing that in turn causes blistering and delamination. Air entrainment will not affect the setting time of the concrete.

3.5—Handling and Testing of Air-Entrained Concrete

The air content of fresh concrete should be closely monitored. The measurement of entrained air content should be performed immediately before discharging the concrete into the forms. Samples for acceptance testing, however, should be taken from the middle of the batch in accordance with ASTM C172, "Standard Practice for Sampling Freshly Mixed Concrete." Density (unit weight) must also be measured.

The methods and materials for performing air-content tests on concrete are described in ASTM C231, "Standard Test Method for Air Content of Freshly Mixed Concrete by the Pressure Method," and ASTM C173, "Standard Test Method for Air Content of Freshly Mixed Concrete by the

Volumetric Method." The gravimetric method (ASTM C138, "Standard Test Method for Density (Unit Weight), Yield, and Air Content (Gravimetric) of Concrete,") is not generally used in the field because it requires knowledge of the theoretical unit weight of the concrete on an air-free basis. Density should also be monitored in the field to verify uniformity between batch mixture proportions and air contents. Hardened cylinder weight should be recorded on concrete test reports adjacent to compressive strength. Cylinders should be weighed immediately after demolding. Air content should be measured each time concrete is sampled, and air meters should be calibrated regularly.

Many factors are involved in the delivery and placement of properly air-entrained concrete. Poor concrete placement, consolidation, and finishing techniques may decrease the air content. After adding an air-entraining admixture, the air content will increase to a maximum value, and then slowly decrease with continued mixing. Pumping and placement operations can reduce the air content, particularly for shotcrete, and in some cases it may be required to test the air content at the point of final discharge in addition to compliance testing at the mixing truck. Even the configuration of the boom on a pump may affect the air content, and tests have shown that there is more air loss when the boom is in a vertical position as opposed to a more horizontal position. Even for concrete with suitable air entrainment, proper placement, consolidation, and curing are critical to producing concrete with adequate durability to cycles of freezing and thawing. Concrete must still be properly proportioned using sound aggregates and must also be protected from freezing until the concrete reaches a strength of about 28 MPa (4000 psi).

CHAPTER 4—WATER-REDUCING AND SET-CONTROLLING ADMIXTURES

4.1—Types and composition

In general, these chemicals act as dispersants for portland cement particles. By separating and spreading out the cement particles, internal friction is reduced, and slump and workability of the concrete is increased. Alternatively, the same workability can be achieved using less water, which lowers the water-cementitious material ratio (w/cm) for a given cement content.

Lowering w/cm is a key method for improving durability. These admixtures also provide the ability to control the time of setting to meet changing jobsite and climatic conditions.

The strength improvement resulting from water-reducing admixtures is primarily a result of reducing the w/cm and increasing cement efficiency. For a given air content, concrete strength is inversely proportional to the w/cm and, therefore, the reduction in water needed to achieve the desired slump and workability when a water-reducing agent is used will result in an increase in strength. The increase in strength using a water-reducing admixture often exceeds the strength from simply reducing the water content. This is due to the admixture's dispersing effect on cement that results in increased hydration efficiency.

Water-reducing admixtures are based on a variety of materials; the most common of which are:

- Lignosulfonic acids and their salts;
- Hydroxylated polymers;
- Hydroxylated carboxylic acids and their salts;
- Sulfonated melamine or naphthalene formaldehyde condensates; and
- Polyether-polycarboxylates.

Each material can have different properties when used as an admixture. In particular, the amount of water reduction and the degree of set retardation can vary considerably. Some materials will entrain air, and other may affect bleeding and finishing properties. A commercial formulation may include accelerating agents or defoamers to counteract these side effects. As a result, it can be difficult to predict an admixture's performance based on its primary ingredient, even if this information is made available. ASTM C494 "Standard Specification for Chemical Admixtures for Concrete," classifies admixtures into categories based on performance:

- Type A Water-reducing admixtures;
- Type B Retarding admixtures;
- Type C Accelerating admixtures;
- Type D Water-reducing and retarding admixture;
- Type E Water-reducing and accelerating admixtures;
- Type F Water-reducing, high-range, admixtures;
- Type G Water-reducing, high-range, and retarding admixtures; and
- Type S Specific performance admixtures.

Admixtures types A through F covered by ASTM C494 are designed to serve a specific purpose. ASTM C494 outlines the performance requirements for an admixture to qualify for each category. Depending on the category, required properties may include the degree of water reduction, minimum or maximum variations in setting time, compressive strength, and the length change of hardened specimens. Some admixtures will meet the requirements of several categories, such as Type A and Type D. In such cases, the admixture will meet Type A requirements at low doses, and will meet Type D requirements at higher doses due to additional set retardation caused by higher dosages of those particular admixtures.

The Type S category can apply to any specialty admixture that does not fit into the other more common categories. The Type S category does not attempt to address the primary purpose of specialty admixtures, but instead provides guidelines for their effects on properties such as setting time and compressive strength to help users avoid unexpected variations in performance. Upon request, a manufacturer is required to provide data to substantiate the specific benefits of the Type S admixture.

ASTM C494 does not cover all possible concrete requirements, and additional properties will need to be tested depending on the application. Proper use of admixtures should begin by gathering available information and comparing the different types and brands that are available. Consideration must be given to information such as uniformity, dispensing, long-term performance, and available service. These are

points that cannot be assessed by concrete tests but could determine successful admixture use.

The admixture manufacturer should be able to provide information covering typical dosage rates, times of setting, and strength gain for local materials and conditions. The evaluation of admixtures should be made with specific job materials (including other chemical admixtures under consideration) under anticipated ambient conditions. Laboratory tests conducted on concrete with water-reducing admixtures should indicate the effect on pertinent properties for the construction project, including: water requirement, air content, slump, rate of slump loss, bleeding, time of setting, compressive strength, flexural strength, and resistance to cycles of freezing and thawing. Following the laboratory tests, field test should be conducted to determine how the admixtures will perform in actual field conditions, considering all relevant factors such as placement equipment, weather and delivery distances.

4.2—Type A, water-reducing admixtures

Type A water-reducing admixtures will decrease mixing water content by 5 to 12%, depending on the admixture, dosage, and other materials and proportions. Type A water-reducing admixtures are useful when placing concrete by means of a pump or tremie, and can assist with applications where placing concrete would otherwise be difficult. They also may improve the properties of concrete containing aggregates that are harsh, poorly graded, or both.

Dosage rates of water-reducing admixtures depend on the type and amount of active ingredients in the admixture. The dosage is based on the cementitious materials content of the concrete mixture and is expressed as milliliters per hundred kilograms (fluid ounces per hundred pounds) of cementitious materials. Typically, the dosage rates of Type A water-reducing admixtures range from 130 to 390 mL per 100 kg (2 to 6 fl oz per 100 lb) of cementitious materials. Higher dosages may result in excessive retardation of the concrete setting time. Manufacturers recommended dosage rates should be followed and trial batches with local materials should be performed to determine the dosage rate for a given concrete mixture. In some occasions, dosages higher or lower than the manufacturer's recommendations may be used, but testing is necessary to ensure the resulting concrete meets the requirements of the project.

The primary ingredients of water-reducing admixtures are organic, which tend to retard the time of setting of the concrete. This retardation may be offset by small additions of chloride or nonchloride accelerating admixtures at the batch plant. Typically, Type A admixtures already contain some accelerating admixtures that offset this natural retardation. Care should be taken to ensure that addition of chloride does not exceed the ACI 318 limits for maximum chloride-ion content in reinforced or prestressed concrete.

4.3—Type B, retarding, and Type D, water-reducing and retarding admixtures

4.3.1 Conventional retarding admixtures—Two types of admixtures are used for the same basic purpose: to offset

unwanted effects of high temperature, such as acceleration of set and reduction of 28-day compressive strength, and to keep concrete workable during the entire placing and consolidation period. Figure 1 indicates the relationship between temperature and setting time of concrete and specifically indicates why retarding admixture formulations are needed in warmer weather.

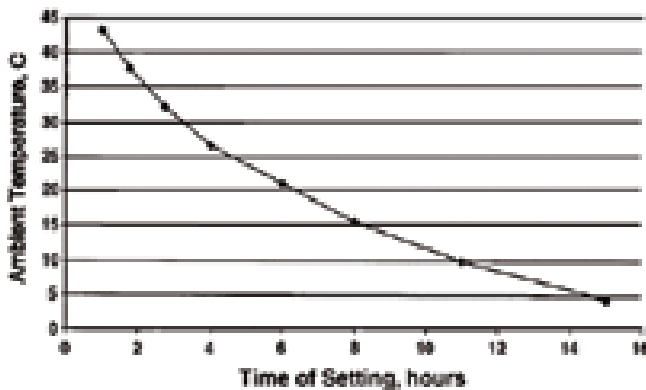


Fig. 1 Relationship between temperature and setting time of concrete. ($^{\circ}\text{F} = ^{\circ}\text{C} \times 9/5 + 32$)

The benefits derived from retarding formulations include the following:

- Permits greater flexibility in extending the time of set and the prevention of cold joints;
- Facilitates finishing in hot weather; and
- Permits full form deflection before initial set of concrete.

As with Type A admixtures, their dosage rates are based on the amount of cementitious materials in the concrete mixture. While both Type B and Type D may provide some water-reduction, Type D is more effective in achieving this goal. The amount of retardation depends upon many factors including: admixture concentration, dosage rate, concrete proportions, and ambient and concrete temperatures.

Different sources and types of cement or different lots of cements from the same source may require different amounts of the admixture to obtain the desired results because of variations in chemical composition, fineness, or both. The time at which the retarding admixture is introduced into the concrete may affect the results. Allowing the cement to become totally wet and delaying admixture addition until all other materials are batched and mixed may result in increased retardation and greater slump increase.

Increased retardation may also be obtained with a higher dosage of the retarding admixture. When high dosages of retarding admixture are used, however, rapid stiffening can occur with some sources of cement, resulting in severe slump loss and difficulties in concrete placement, consolidation, and finishing.

4.3.2 Extended-set admixtures - Advances in admixture technology have resulted in the development of highly potent retarding admixtures called extended-set admixtures or hydration-controlling admixtures. These admixtures are capable of stopping the hydration of cementitious systems, thereby providing a means to control the hydration and setting characteristics of concrete.

Extended-set admixtures are used in three primary applications: stabilization of concrete wash water, stabilization of returned plastic concrete, and stabilization of freshly batched concrete for long hauls. The use of extended-set admixtures in stabilization of concrete wash water eliminates the dumping of water that is used to wash out a ready-mixed concrete truck drum while keeping the fins and inner drum clean. The process is relatively simple and involves the addition of low dosages of the extended-set admixture to the wash water to control the hydration of concrete stuck to the fins and inside the drum. The stabilized wash water may be included in the mixing water for fresh concrete that is batched the next day or after a weekend. The setting and strength development characteristics of concrete are not adversely affected by the use of stabilized wash water.

The use of extended-set admixtures to stabilize returned unhardened concrete has made it possible to reuse such concrete during the same production day or the next day in lieu of disposal. The dosage of extended-set admixture required depends on several factors that include the ambient and concrete temperatures, the ingredients used in the manufacture of the concrete, and the age of the concrete. Stabilized concrete is reused by batching fresh concrete on top of the stabilized concrete. In overnight applications, an accelerating admixture may be used to reinitiate the hydration process before adding fresh concrete. Increasingly, extended-set admixtures are being used for long hauls and to maintain slump and concrete temperature during transit, especially in warm weather. For this application, the extended-set admixture is added during or immediately after batching, and the required dosage is established based on the amount of retardation desired.

4.4—Type C, accelerating, and Type E, water-reducing and accelerating admixtures

Accelerating admixtures are added to concrete to decrease both the initial and final time of set and accelerate the early strength development. Figure 1, which shows the relationship between temperature and setting time of concrete, specifically indicates why accelerating admixture formulations are needed.

The earlier setting time and increased early strength gain of concrete brought about by an accelerating admixture will result in a number of benefits, including reduced bleeding, earlier finishing, improved protection against early exposure to freezing and thawing, earlier use of structure, and reduction of protection time to achieve a given quality. Accelerating admixtures do not normally act as anti-freeze agents; therefore, protection of the concrete at early ages is required when freezing temperatures are expected.

Although calcium chloride is the most effective and economical accelerator for concrete, its potential to cause corrosion of reinforcing steel limits its use. ACI Committee 318 limits the water-soluble chloride-ion content based on the intended use of the concrete and many government agencies prohibit its use.

The following guidelines should be considered before using calcium chloride or chloride-bearing admixture:

- It should not be used in prestressed concrete because of its potential for causing corrosion;
- The presence of chloride ion has been associated with corrosion of galvanized steel such as when this material is used as permanent forms for roof decks;
- Where sulfate-resisting concrete is required, calcium chloride should not be used;
- Calcium chloride should be avoided in reinforced concrete in a moist condition. In non-reinforced concrete, the level of calcium chloride used should not exceed 2% by weight of cementitious material;
- Calcium chloride should be dissolved in a portion of mixing water before batching because undissolved lumps may later disfigure concrete surfaces;
- Calcium chloride precipitates most air-entraining agents so it must be dispensed separately into the mixture; and
- Field experience and laboratory tests have demonstrated that the use of uncoated aluminum conduit in reinforced concrete containing 1% or more of calcium chloride may lead to sufficient corrosion of the aluminum to collapse the conduit or crack the concrete.

Non-chloride accelerating admixtures are available that provide the benefits of an accelerating admixture without the increased risk of corrosion from chloride. Formulations based on salts of formates, nitrates, nitrites, and thiocyanates are available from admixture manufacturers. These nonchloride accelerators are effective for set acceleration and strength development; however, the degree of effectiveness of some of these admixtures is dependent on the ambient temperature and concrete temperature at the time of placement.

Some formulations will give protection against freezing to concrete placed in sub-freezing ambient temperatures, and form the basis of cold weather admixture systems (Section 5.5). These nonchloride accelerating admixtures offer year-round versatility because they are available to be used for acceleration purposes in cool weather and for sub-freezing protection.

4.5—High-range, water-reducing admixtures

High-range, water-reducing admixtures (HRWR), often called superplasticizers, serve a similar function to conventional water-reducing admixtures, but are much more efficient and can allow for reduced water contents of 30% or more without the side effect of excessive set retardation. By varying the dosage rate and the amount of mixing water, an HRWR admixture can be used to produce:

- Concrete of normal workability at a lower w/cm ;
- Highly flowable, nearly self-leveling concrete at the same or lower w/cm as concrete of normal workability; and
- A combination of the two; that is, concrete of moderately increased workability with a reduction in the w/cm .

When used for the purpose of producing flowing concrete, HRWR admixtures facilitate both concrete placement and consolidation.

HRWR admixtures should meet the requirements of ASTM C494 for classification as Type F, high-range, water-reducing, or Type G, high-range water-reducing and retarding admixtures. When used to produce flowing concrete, they should also meet the requirements of ASTM C1017, "Standard Specification for Chemical Admixtures for Use in Producing Flowing Concrete," Type 1, plasticizing, or Type 2, plasticizing and retarding admixtures. HRWR admixtures are organic products that typically fall into three families based on ingredients:

- Sulfonated melamine-formaldehyde condensate;
- Sulfonated naphthalene-formaldehyde condensate; and
- Polyether-polycarboxylates.

HRWR admixtures act in a manner similar to conventional water-reducing admixtures, except they are more efficient at dispersing fine-grained materials such as cement, fly ash, slag cement, natural pozzolans, and silica fume. The most widely used HRWR admixtures do not entrain air but may alter the air-void system. Concrete containing HRWR admixtures, however, may have adequate resistance to freezing and thawing even though the spacing factors may be greater than 0.2 mm (0.008 in.).²

A characteristic of some older HRWR admixtures is that their slump-increasing effect is retained in concrete for 30 to 60 min. The amount of time that the concrete retains the increased slump is dependent upon the type and quantity of cement, the temperature of the concrete, the type of HRWR admixture, the dosage rate used, the initial slump of the concrete, the mixing time, and the thoroughness of mixing. Modern HRWR admixtures based on polyether-polycarboxylate technology are different chemically and more effective than older HRWR admixtures. Polyether-polycarboxylate HRWR admixtures also retard less and develop strength faster compared to the other HRWR admixture formulations. Because of their increased efficiency, polyether-polycarboxylate HRWRs have gained widespread acceptance, particularly in precast concrete applications and in making self-consolidating concrete, a high-performance concrete with high flowability that requires minimal or no vibration for consolidation. With some HRWR admixtures, it is possible to redose the concrete to regain the increased workability. HRWR admixtures that offer extended slump life are also commercially available.

HRWR admixtures can be used with conventional water-reducing admixtures or retarding admixtures to reduce slump loss and stickiness, especially in silica-fume concrete mixtures. These combinations of admixtures may also cause unanticipated or excessive set retardation, so trial batches should be performed.

The strength of hardened concrete containing HRWR admixtures is normally higher than that predicted by the lower w/cm alone. As with conventional admixtures, this is believed to be due to the dispersing effect of HRWR admixtures on the cement and other cementitious or pozzolanic materials. Because the w/cm of mixtures containing HRWR admixtures is typically low, shrinkage and permeability may also be reduced and the overall durability of the concrete may be increased.

A good summary of benefits and limitations for this class of admixtures can be found in National Ready Mixed Concrete Association (NRMCA) Publication No. 158, "Superplasticizers in Ready Mixed Concrete."

4.6—Mid-range, water-reducing admixtures

Water-reducing admixtures that provide moderate water reduction without significantly delaying the setting characteristics of concrete are also available. These admixtures provide more water reduction than most conventional (Type A) water-reducing admixtures but not enough to be classified as high-range, water-reducing admixtures (Type F). As a result, they are often referred to as mid-range, water-reducing admixtures. These admixtures can help reduce stickiness and improve finishability and pumpability of concrete including concrete containing silica fume, or concrete made with manufactured or harsh sand. Mid-range, water-reducing admixtures are typically used in a slump range of 125 to 200 mm (5 to 8 in.) and may entrain additional air. Therefore, evaluations should be performed to establish air-entraining admixture dosage for a desired air content.

4.7—Admixtures for self-consolidating concrete

Self-consolidating concrete (SCC) describes a specialized, high-slump concrete mixture able to flow and consolidate under its own weight with little or no vibration and without segregation or excessive bleeding. SCC is useful for placing concrete through heavily congested reinforcement and for building structures that require very smooth formed surfaces. The properties of SCC are made possible through a combination of admixture selection and an increase in the fines content compared to normal slump concrete. SCC mixtures usually contain a polyether-polycarboxylate HRWR admixture (Section 4.5) to provide the required slump and flow. Higher levels of fines are used to increase cohesiveness and prevent segregation and bleeding in the highly plasticized concrete, although alternatively a viscosity modifying admixture (VMA) can be used to increase stability (see Section 5.4). SCC may contain other categories of admixtures, depending on the application.

4.8—Admixtures for slump and workability retention

Admixtures that provide slump and workability retention without affecting the initial time of set of concrete or early-age strength development, as is the case with retarding admixtures, are available in the industry. On their own, these workability-retaining admixtures have minimal effect on water reduction and can be used in combination with normal, mid-range, or high-range, water-reducing admixtures to provide desired levels of workability retention in concrete mixtures, in particular, high-slump concretes or SCC mixtures. Workability-retaining admixtures should meet the Type S requirements in ASTM C 494.

CHAPTER 5—SPECIALTY ADMIXTURES

5.1—Corrosion-inhibiting admixtures

Reinforcing steel corrosion is a major concern with regard to the durability of reinforced concrete structures. Each year, numerous bridges, parking garages, and other concrete structures undergo extensive repair and rehabilitation to restore their structural integrity as a result of corrosion damage.

The high alkalinity of new concrete protects reinforcement from corrosion due to the formation of a corrosion resistant passive layer at the surface of the steel. However, this passive layer can be destabilized in concrete contaminated by chlorides, which allows corrosion to begin if there is sufficient moisture and oxygen present at the surface of the steel. Chlorides can be introduced into concrete from deicing salts that are used in winter months to melt snow or ice, from seawater, or from the concrete mixture ingredients.

There are several ways of combating chloride-induced corrosion, one of which is the use of corrosion-inhibiting admixtures. These admixtures are added to concrete during batching and they protect embedded reinforcement by delaying the onset of corrosion and also by reducing the rate of corrosion after initiation. There are several commercially available inhibitors on the market. Active ingredients include inorganic materials such as calcium nitrite, and organic materials such as amines and esters. Calcium nitrite resists corrosion by stabilizing the passive layer in the presence of chloride ions. However, the dose of calcium nitrite must be sufficient for the level of chloride contamination. Organic inhibitors function by forming a protective film at the surface of the steel to help resist moisture and chemical attack. As with all admixtures, the manufacturer's recommendations should be followed with regard to dosage.

Although corrosion inhibiting admixtures can help resist corrosion, these admixtures are intended to compliment, rather than replace, proper mixture proportioning and good concrete practices. For example, corrosion resistance can also be increased by reducing the permeability of the concrete through the use of low w/cm (possibly with the aid of a HRWR admixture, Section 4.5) or with a permeability reducing admixture (Section 5.6). Some available corrosion inhibitors will accelerate the time of set in concrete and therefore retarding admixtures may be necessary to improve working time. Adjustments to batch water are usually necessary, depending on the dosage, to ensure that maximum water content for the mixture is not exceeded.

5.2—Shrinkage-reducing admixtures

The loss of moisture from concrete as it dries results in a volume contraction called drying shrinkage. Drying shrinkage tends to be undesirable when it leads to cracking due to either internal or external restraint, curling of floor slabs, and excessive loss of prestress in prestressed concrete applications. The magnitude of drying shrinkage can be reduced by minimizing the unit water content of a concrete mixture, using good-quality aggregates, and using the largest coarse aggregate size and content consistent with

the particular application. In addition, admixtures have been introduced to help further reduce drying shrinkage. These are based on organic materials such as propylene glycol or related compounds that reduce the surface tension of water in the capillary pores of concrete, thereby reducing the tension forces within the concrete matrix that lead to drying shrinkage. This mode of action should not be confused with shrinkage-compensating materials such as expansive, or Type K, cements. Manufacturer's recommendations should be followed with regard to dosage and suitability of shrinkage-reducing admixtures for use in freezing-and-thawing environments.

5.3—Admixtures for controlling alkali-silica reactivity

Alkali-silica reactivity (ASR) is a destructive reaction between soluble alkalis in concrete and reactive silica in certain types of aggregate. Reactive forms of silica will dissolve in the highly alkaline pore solution, and then react with sodium or potassium ions to produce a water-absorptive gel that expands and fractures the concrete. The reaction is typically slow and is dependent on the total amount of alkali present in the concrete, the reactivity of the aggregates, and the availability of moisture. ASR can be mitigated by using low-alkali cement, sufficient amounts of pozzolans or slag cement, and if economically feasible, non-reactive aggregates. Alternatively, ASR can be mitigated by using lithium-based chemical admixtures. Lithium compounds are effective at reducing ASR because if lithium ions are present in a sufficient ratio to sodium and potassium, they will preferentially react with silica to form non-absorptive lithium silicates. The required dose of lithium admixture is calculated based on the alkali content of the concrete to supply the correct ratio of lithium to other alkalis. Lithium admixtures can accelerate the time of set in concrete. Commercially available retarding admixtures are used when increased working time is needed.

5.4—Admixtures for underwater concrete

Placing concrete underwater can be particularly challenging because of the potential for washout of the cement and fines from the mixture, which can reduce the strength and integrity of the in-place concrete. Although placement techniques, such as tremies, have been used successfully to place concrete underwater, there are situations where enhanced cohesiveness of the concrete mixture is required, necessitating the use of an antiwashout or viscosity-modifying admixture (VMA). Some of these admixtures are formulated from either cellulose ether or whelan gum, and they work simply by binding excess water in the concrete mixture, thereby increasing the cohesiveness and viscosity of the concrete. The overall benefit is a reduction in washout of cement and fines, resistance to dilution with water as the mixture is placed, and preservation of the integrity of the in-place concrete. Another use of VMAs is to prevent segregation in high-slump concrete, SCC, or mixtures deficient in fines. Proper placement techniques should

be followed even with concrete treated with a VMA or antiwashout admixture.

5.5—Admixture for cold weather

As described in ACI 212.3R-10, cold-weather admixtures systems have been developed that allow concrete to be placed and cured in subfreezing temperatures. The requirements for these systems are described in ASTM C1622, "Standard Specification for Cold-Weather Admixture Systems." Freeze-resistant admixtures suppress the freezing point of concrete and permit placement and curing of the concrete below the freezing point of water. These admixtures will usually contain a non-chloride accelerating admixture (Type C), but will use a much higher dose than what would be used for concrete placed at temperatures above freezing. Other components may include water-reducing admixtures (Types A, E, or F), and other materials found to depress the freezing point of water, including corrosion-inhibiting admixtures (Section 5.1) or shrinkage-reducing admixtures (Section 5.2). Despite the cold weather, some systems will use a set-retarding admixture (Type B or D) to avoid early stiffening of the concrete due to the high level of accelerating admixture. Due to the variability in systems available, each system should be evaluated for properties important to construction, such as slump, working time, stability of entrained air, finishing properties, setting time and strength gain.

5.6—Permeability-reducing admixtures

The penetration of water and water-borne chemicals is the root cause of most of the destructive mechanisms that damage concrete. Additionally, the penetration of water through concrete can compromise interior living spaces, contaminate potable water reservoirs, or allow contaminated water to escape into the environment. Water can enter concrete through the network of pores and capillaries that forms during cement hydration, or through cracks and other voids in the concrete. Therefore, almost all concrete structures require protection from water. Common methods of protection include the application of surface applied sealers and membranes that act as a physical barrier between the concrete and the source of water. Increasingly, concrete structures are being designed with permeability-reducing admixtures (PRAs) to resist water penetration, in which the protection becomes an integral part of the concrete itself rather than just a surface barrier.

There is a wide variety of PRAs available, and it is important to match the properties of an admixture to the actual service conditions. For this reason, ACI 212 divides PRAs into two categories: permeability-reducing admixture for hydrostatic conditions (PRAH), and permeability-reducing admixture for non-hydrostatic conditions (PRAN).

PRAHs are primarily intended for use in concrete that is exposed to water under pressure and are sometimes called waterproofing admixtures. They provide the highest level of water resistance and are suitable for permanently damp or submerged environments. Typical applications include concrete installed underground, pools, tunnels, and

water reservoirs. To resist water under pressure, PRAHs use a pore blocking mechanism that is stable even under high hydrostatic pressure. Materials include hydrophilic crystalline chemicals that react with cement and water to grow pore blocking deposits or polymer globules that pack into pores under pressure. In the case of crystalline admixtures, the admixture can reactivate in the presence of incoming water (such as through a crack) and generate new deposits that increase the self-sealing capacity of cracked, leaking concrete. It is important to test PRAHs using methods that apply direct water pressure to the concrete. Suitable methods include the US Army Corps of Engineers CRD-C48, "Standard Test Method for Water Permeability of Concrete," or the European test methods BS EN 12390-8, "Testing Hardened Concrete. Depth of Penetration of Water Under Pressure," and DIN 1048-2, "Testing Concrete: Testing of Hardened Concrete Components."

PRANs are intended for applications that are not subject to hydrostatic pressure, and are sometimes called dampproofing admixtures. Most PRANs contain water repellent chemicals that shed water and reduce water absorption into the concrete. Water repellent ingredients can include various soaps, oils, and long chain fatty acid derivatives. Other PRANs are based on finely divided solids such as talc, bentonite, colloidal silica, and silicates. These fillers reduce water migration through pores, although not to the same degree as a PRAH, and are sometimes called densifiers. PRANs can be tested using non-hydrostatic absorption test methods such as ASTM C1585, "Standard Test Method for Measurement of Rate of Absorption of Water by Hydraulic-Cement Concretes," and BS EN 1881-122, "Testing Concrete Part 122: Method for Determination of Water Absorption." Note that these absorption tests are not reliable for evaluating PRAHs because they do not apply water under pressure.

The use of a PRA will not compensate for poor concrete practices. The concrete must be fully consolidated and properly cured. The PRA manufacturer should be consulted regarding proper selection and use.

CHAPTER 6—ADMIXTURE DISPENSERS

6.1—Industry requirements and dispensing methods

The subject of liquid admixture dispensers covers the entire process from storage at the producer's plant to introduction into the concrete batch before discharge. Their operation may be separated into four functions:

1. The dispenser transports the admixture from storage to the batch;
2. The dispenser measures the quantity of admixture required;
3. The dispenser provides verification of the volume dispensed; and
4. The dispenser injects the admixture into or onto the batch.

These are the basic functions. In practice, some of the functions may be combined, for example, measurement and verification. For reliability, the functions may be interlocked to prevent false or inaccurate batching of the admixture and to dispense the admixture in the optimal sequence in the concrete production process.

6.2—Accuracy requirements

Standards of operation for admixture dispensers are specified by scientific groups, concrete producers' trade organizations, and government agencies with authority over concrete production contracts.

The NRMCA and ASTM C94, "Standard Specification for Ready-Mixed Concrete," specify a batching tolerance of 3% of the required volume or the minimum recommended dosage rate per unit of cement, whichever is greater.

6.3—Application considerations and compatibility

Admixture dispensing systems are complex, using parts made of different materials. Therefore, the admixture dispensed through this system should be chemically and operationally compatible with these materials.

The basic rules of application and injection are that the admixtures should not be mixed together. Table 3 contains some suggested practices for admixture sequencing. Other sequencing practices may be used if test data supports the practice.

Table 3—Suggested Admixture Sequencing Practices

ADMIXTURES	INJECTION SEQUENCE
Air-entraining admixture	With early water or on sand
Water-reducing admixtures	Follow air-entraining solution
Accelerating admixtures	With water, do not mix with air-entraining admixture
High-range, water-reducing admixtures	With the last portion of the water at the batch plant
Polycarboxylate high-range, water-reducing admixtures	With early water or with the last portion of the water at the batch plant
Other admixtures types	Consult manufacturer

6.4—Field and truck mounted dispensers

For a number of reasons, some admixtures are dosed at the jobsite. This could be because the mixture contains a high dosage of accelerator or the placing contractor has an admixture not supplied by the concrete producer. In these cases, the use of a truck-mounted dispenser in the form of a calibrated storage tank can be used. The tank is usually charged with the admixture at the same time the concrete is loaded. The contractor can request an increase in slump by injection of a HRWR admixture, and the driver will dispense the required amount into the turning drum. The volume dispensed will be recorded on the delivery ticket. The injection should be performed under pressure through a spray nozzle to thoroughly disperse the admixture into the drum. Field dispensers, consisting of a measuring unit, pump, and dosing wand can also be used at the job site.

6.5—Dispenser maintenance

It is incumbent on the concrete producer to take as great an interest in the admixture dispensing equipment as in the rest of the batch plant. Operating personnel should be trained in the proper operation, winterization, maintenance, and calibration of admixture dispensers. Spare parts should be retained as needed for immediate repairs. Regular cleaning and calibration of the systems should be performed by qualified internal personnel or by the admixture supplier's service representative. Admixtures have too powerful an influence on the quality of the concrete produced for their dispensing to be given cursory attention.

CHAPTER 7—CONCLUSION

Chemical admixtures have become a very useful and integral component of modern concrete practices. Admixtures are not a panacea for every ill the concrete producer, architect, engineer, owner, or contractor faces when dealing with the many variables of concrete, but they do offer significant improvements in both the plastic and hardened state to all concrete. Continued research and development will provide additional reliability, economy, and performance for creating sustainable concrete.

CHAPTER 8—REFERENCES

8.1—Cited references

1. ACI, "ACI Concrete Terminology," American Concrete Institute, Farmington Hills, MI, <http://terminology.concrete.org>.
2. Ramachandran, V. S., "Concrete Admixtures Handbook: Properties, Science, and Technology," 2nd Edition, 1995, pp. 472-474. [AU1:]

8.2—List of relevant ASTM standards

- C94 Standard Specification for Ready-Mixed Concrete
- C138 Standard Test Method for Density (Unit Weight), Yield, and Air Content (Gravimetric) of Concrete
- C143 Standard Test Method for Slump of Hydraulic-Cement Concrete
- C150 Standard Specification for Portland Cement
- C173 Standard Test Method for Air Content of Freshly Mixed Concrete by the Volumetric Method
- C231 Standard Test Method for Air Content of Freshly Mixed Concrete by the Pressure Method
- C260 Standard Specification for Air-Entraining Admixtures for Concrete
- C494 Standard Specification for Chemical Admixtures for Concrete
- C869 Standard Specification for Foaming Agents Used in Making Preformed Foam for Cellular Concrete
- C937 Standard Specification for Grout Fluidifier for Preplaced-Aggregate Concrete
- C979 Standard Specification for Pigments for Integrally Colored Concrete
- C1012 Standard Test Method for Length Change of Hydraulic-Cement Mortars Exposed to a Sulfate Solution
- C1017 Standard Specification for Chemical Admixtures for Use in Producing Flowing Concrete
- C1141 Standard Specification for Admixtures for Shotcrete
- C1157 Standard Performance Specification for Hydraulic Cement
- D98 Standard Specification for Calcium Chloride



American Concrete Institute®
Advancing concrete knowledge

As ACI begins its second century of advancing concrete knowledge, its original chartered purpose remains “to provide a comradeship in finding the best ways to do concrete work of all kinds and in spreading knowledge.” In keeping with this purpose, ACI supports the following activities:

- Technical committees that produce consensus reports, guides, specifications, and codes.
- Spring and fall conventions to facilitate the work of its committees.
- Educational seminars that disseminate reliable information on concrete.
- Certification programs for personnel employed within the concrete industry.
- Student programs such as scholarships, internships, and competitions.
- Sponsoring and co-sponsoring international conferences and symposia.
- Formal coordination with several international concrete related societies.
- Periodicals: the ACI Structural Journal and the ACI Materials Journal, and Concrete International.

Benefits of membership include a subscription to Concrete International and to an ACI Journal. ACI members receive discounts of up to 40% on all ACI products and services, including documents, seminars and convention registration fees.

As a member of ACI, you join thousands of practitioners and professionals worldwide who share a commitment to maintain the highest industry standards for concrete technology, construction, and practices. In addition, ACI chapters provide opportunities for interaction of professionals and practitioners at a local level.

American Concrete Institute
38800 Country Club Drive
Farmington Hills, MI 48331
U.S.A.
Phone: 248-848-3700
Fax: 248-848-3701

www.concrete.org

Chemical Admixtures for Concrete

The AMERICAN CONCRETE INSTITUTE

was founded in 1904 as a nonprofit membership organization dedicated to public service and representing the user interest in the field of concrete. ACI gathers and distributes information on the improvement of design, construction and maintenance of concrete products and structures. The work of ACI is conducted by individual ACI members and through volunteer committees composed of both members and non-members.

The committees, as well as ACI as a whole, operate under a consensus format, which assures all participants the right to have their views considered. Committee activities include the development of building codes and specifications; analysis of research and development results; presentation of construction and repair techniques; and education.

Individuals interested in the activities of ACI are encouraged to become a member. There are no educational or employment requirements. ACI's membership is composed of engineers, architects, scientists, contractors, educators, and representatives from a variety of companies and organizations.

Members are encouraged to participate in committee activities that relate to their specific areas of interest. For more information, contact ACI.

www.concrete.org



American Concrete Institute®
Advancing concrete knowledge



Wargaming Headquarters, Κύπρος

2006-2016

Εξελιγμένα Συστήματα Στεγάνωσης & Προστασίας



PENETRON HELLAS Ε.Π.Ε.

Θρακομακεδόνων 50-52
136 79 Αχαρνές
Τηλ: 210 2448250
Fax: 210 2476803
info@penetron.gr
www.penetron.gr

10 χρόνια στην Ελλάδα και 4 δεκαετίες στον διεθνή τομέα των χημικών για δομικές κατασκευές

Η Ιστορία...

Η **PENETRON INTERNATIONAL** αναγνωρίζεται ως παγκόσμιος ηγέτης των τεχνολογιών ανάπτυξης κρυστάλλων στο σκυρόδεμα, με εφαρμογές στον τομέα της στεγανοποίησης, προστασίας & επισκευής, αλλά και της ανθεκτικότητας του σκυροδέματος.

Με έδρα το Long Island της Νέας Υόρκης (άποψη των κεντρικών γραφείων-1^η αριστερά φωτογραφία), η εταιρεία ιδρύθηκε το 1979 και, επί τέσσερις δεκαετίες, τα προϊόντα της οικογένειας **Penetron** έχουν καθιερώσει την παγκόσμια φήμη τους, καλύπτοντας και τις πιο απαιτητικές προδιαγραφές έργων ανά τον κόσμο, σε πάνω από 60 χώρες. Στα πλαίσια της παγκόσμιας ανάπτυξης, από τον Νοέμβριο του 2006, δημιουργήθηκε στην Αθήνα η **PENETRON HELLAS**, θυγατρική της **PENETRON INTERNATIONAL** (στην 2^η αριστερά φωτογραφία διακρίνονται τα γραφεία στις Αχαρνές Αττικής). Η νέα αυτή θυγατρική εταιρεία, καλύπτει την ευρύτερη περιοχή της Νοτιοανατολικής Ευρώπης, τόσο σε θέματα διανομής των προϊόντων **Penetron**, όσο και στην ανάπτυξη και τεχνική υποστήριξη των τεχνολογιών της εταιρείας. Τον Μάιο του 2016, η **PENETRON HELLAS** επεκτείνεται πλησίον και σε δεύτερη εγκατάσταση, που περιλαμβάνει το νέο Κέντρο Διακίνησης Νοτιοανατολικής Ευρώπης, αλλά και την καινοτόμο Ακαδημία Εκπαίδευσης, με το Κέντρο Τεχνικής Υποστήριξης (3^η φωτογραφία αριστερά).

Πιστοποιήσεις

Η **PENETRON HELLAS** από τον Ιανουάριο του 2012 φέρει πιστοποίηση Ολικής Ποιότητας (TotalQuality): ISO 9001, ISO 14001 και EL0T 18001 (OHSAS).

Στο επίπεδο της παραγωγής, οι υψηλές απαιτήσεις ποιοτικού ελέγχου στις υπερσύγχρονες εγκαταστάσεις της **PENETRON INTERNATIONAL** έχουν κερδίσει την πιστοποίηση ISO 9001 και ISO 14001.



Θοδωρής Μεντζικοφάκης

Γενικός Διευθυντής/Διαχειριστής
Μέτοχος Επένδυσης
PENETRON HELLAS



Ο βασικός στόχος της εταιρείας μας, τα 10 αυτά χρόνια που πέρασαν, παραμένει ακριβώς ο ίδιος! Ακολουθώντας την λαμπρή παγκόσμια πορεία της μητρικής **PENETRON INTERNATIONAL**, θέλουμε και η **PENETRON HELLAS**, να διαδραματίσει, στην ευρύτερη περιοχή της Νοτιοανατολικής Ευρώπης, σημαντικό ρόλο, στον τομέα των χημικών τεχνολογιών για τις κατασκευές, όπως με τα 3ης γενιάς προϊόντα ανάπτυξης κρυστάλλων σε σκυρόδεμα. Στόχος μας τώρα είναι η περαιτέρω ενδυνάμωση, του υφιστάμενου δικτύου συνεργατών διανομής & τεχνικής υποστήριξης, σε όλη την Νοτιοανατολική Ευρώπη, με παράλληλη ανάπτυξη της γκάμας των συστημάτων, για την καλύτερη κάλυψη των εφαρμογών και των απαιτήσεων της αγοράς.

Όλα αυτά, σε ένα περιβάλλον, που η εταιρεία μας προσπαθεί να προστατεύσει, ακολουθώντας «πράσινες» τεχνολογίες, ανακύκλωση, ασφάλεια εργασίας, πρότυπα και πιστοποιημένες διαδικασίες, που εγγυώνται την διατήρηση του οικοσυστήματος, την ασφάλεια των εργαζομένων και τη διασφάλιση συστημάτων φιλικών προς τον τελικό χρήστη. Σημαντικό ρόλο στο έργο μας και στην επιτυχία του παίζουν τα στελέχη και όλοι οι συνεργάτες μας. Η εταιρεία μας θέλει να δημιουργήσει, για όλους αυτούς, νέες θέσεις απασχόλησης, ένα ασφαλές και δημιουργικό περιβάλλον εργασίας, ευκαιρίες καριέρας, αλλά και ανθρώπινες καθημερινές σχέσεις. Οι νέες μας επιπρόσθετες εγκαταστάσεις, στις Αχαρνές, που περιλαμβάνουν, το νέο Κέντρο Διακίνησης Νοτιοανατολικής Ευρώπης, αλλά και την πρότυπη Ακαδημία Εκπαίδευσης με το Κέντρο Τεχνικής Υποστήριξης, θα ενδυναμώσουν το έργο μας και θα ανεβάσουν ψηλά το επίπεδο παροχής υπηρεσιών της εταιρείας μας.

Είμαι προσωπικά υπερήφανος για τα αποτελέσματα της δεκαετίας που πέρασε και που, παρά τις αντίξοες οικονομικές συνθήκες και την συνεχιζόμενη κρίση, η εταιρεία μας συνεχίζει, δημιουργικά και ανερχόμενα το έργο και τα επιτεύγματά της!

«Αποδεχόμαστε τις προκλήσεις, μας τρέφει η ευγενής άμιλλα και δυναμώνουμε από τις δυσκολίες και τις υψηλές απαιτήσεις των στόχων μας»

PENETRON HELLAS

2006-2016

10 YEARS

Thank you!



Πορεία

Από την συνάντηση του CEO και προέδρου της **PENETRON INTERNATIONAL**, κ. Robert Revera, με τον κ. Θοδωρή Μεντζικοφάκη (έμπειρου στελέχους τότε, στην αγορά των Χημικών για Κατασκευές), στην Διεθνή Έκθεση Δόμησης SAIE 2006, στην Ιταλία, (1^η άνω φωτογραφία), όπου συμφώνησαν την ίδρυση της **PENETRON HELLAS**, μέχρι και φέτος, στον εορτασμό των 10 χρόνων της εταιρείας (2^η άνω φωτογραφία), πολλά έχουν επιτευχθεί και μας προετοιμάζουν για ακόμη περισσότερα, όπως δήλωσε ο πρόεδρος του ομίλου.

Ο κ. Jozef Van Beeck, Διευθυντής διεθνών πωλήσεων και marketing του ομίλου και μέλος της διοικητικής ομάδας της **PENETRON INTERNATIONAL** (3η άνω φωτογραφία), δήλωσε και αυτός, πως οι επιτυχίες της **PENETRON HELLAS**, σε ένα τόσο δύσκολο παγκόσμιο, αλλά και τοπικό επιχειρησιακό περιβάλλον, αναδεικνύουν την αποτελεσματικότητα της Ελληνικής ομάδας, αλλά και την δυναμική που αναπτύσσει η εταιρεία σε παγκόσμιο επίπεδο, τα τελευταία χρόνια.

Η ανάπτυξη της εταιρείας, με την θέσπιση συνεργατών, εκτός του διευρυμένου δικτύου της Ελλάδος, σε Κύπρο και σε όλες τις Βαλκανικές χώρες, ολοκληρώνει τον κύκλο του δικτύου διανομής και της τεχνικής υποστήριξης στην ευρύτερη περιοχή.

Προϊόντα & Τεχνολογίες





www.penetron.gr
www.penetron.com

PENETRON HELLAS Ε.Π.Ε.

Θρακομακεδόνων 50-52

136 79 Αχαρνές

Τηλ: 210 2448250

Fax: 210 2476803

info@penetron.gr

www.penetron.gr

